




CERAMIC for LUXURY



## **EANTASTIC**





### **Explore** the Creative **World of Ceramic Art**

Blackberry is a uprising manufacturer and exporter of all type of ceramic tiles. We are rooted in India, creating world with our voguish surfaces.



# LET'S YOUR SPACES DECORATE WITH DESIGNER WALL TILES

Passion for beauty, innovation, fashion, style and committed to sustainability in our lives space discover for you by "Blackberry Design studio" team to be decorate your space indoor or outdoor, express yourself with high quality Designer wall tiles for next level of your dreams with luxury feel.

300 x 300MM

#### TECHNICAL FEATURES





RESISTANT TO SCRATCHES



EASY TO CLEAN



WATER RESISTANT



CHEMICAL AND STAIN RESISTANT



ECOLOGICAL



WEAR RESISTANT



RESISTANT TO CHEMICALS






FIREPROOF



RANDOM

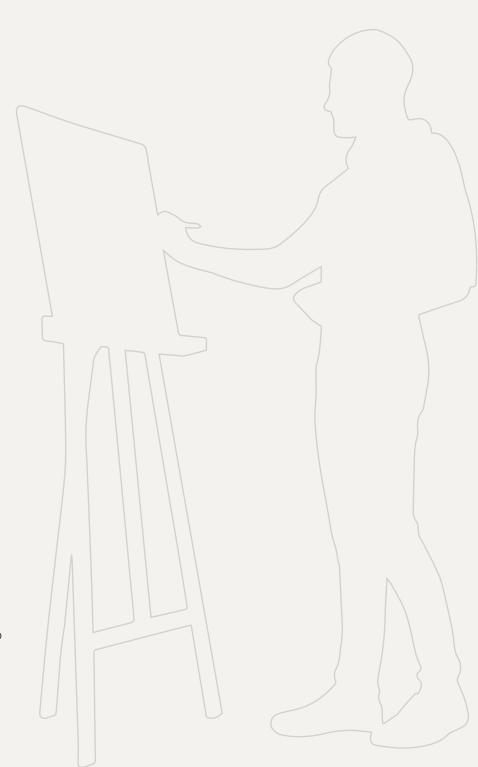

















**LUSTER 506** 

**LUSTER 507** 

**LUSTER 508** 

**LUSTER 509** 

**LUSTER 510** 

**LUSTER 511** 

**LUSTER 512** 









































**LUSTER 514** 

**GLUE 701** 



**GLUE 703** 



































**GLUE 708** 

**GLUE 710** 

**GLUE 711** 

**GLUE 712** 

**GLUE 713** 

**GLUE 714** 





































**GLUE 715** 

**GLUE 716** 

**GLUE 717** 



**GLUE 718** 

**GLUE 719** 

**GLUE 720** 

**GLUE 721** 

**GLUE 722** 







































**GLUE 725** 

**GLUE 726** 

**GLUE 727** 

**GLUE 728** 

**GLUE 729** 

**GLUE 730** 









































**GLUE 733** 

**GLUE 780** 

**GLUE 781** 

**GLUE 782** 

**GLUE 783** 

**GLUE 784** 



























**MATT 331** 

**GLUE 810** 

**GLUE 811** 

**GLUE 812** 

**GLUE 813** 
















Plain



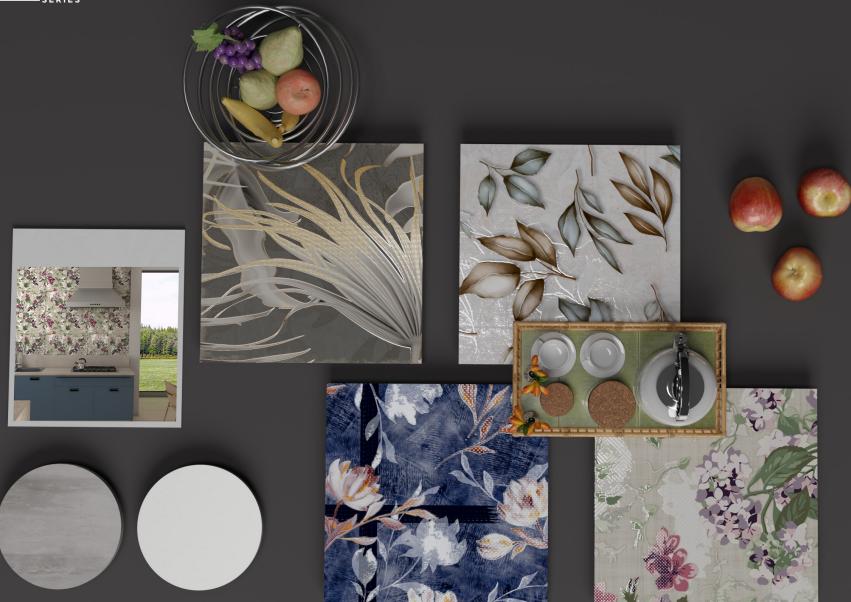







Finish:

Luster

Random:

6 face

















Finish:

Luster

Random:

5 face




















Finish:

Luster

Random:

6 face

















#### LUSTER **508**

Finish:

Luster

Random:

5 face







































Finish:

Luster

Random:

6 face



















Finish:

Luster

Random:

6 face

















#### LUSTER **511**

Finish:

Luster

Random:

6 face

















Finish:

Luster

Random:

6 face





















Finish:

Luster

Random:

5 face















CERAMIC for LUXURY



#### LUSTER **514**

Finish:

Luster

Random:

5 face



















#### GLUE **701**

Finish:

Glue

Random:

2 face



















#### GLUE **702**

Finish:

Glue

Random:

2 face















CERAMIC for LUXURY



#### GLUE **703**

Finish:

Glue

Random:

1 face

















#### GLUE **704**

Finish:

Glue

Random:

1 face












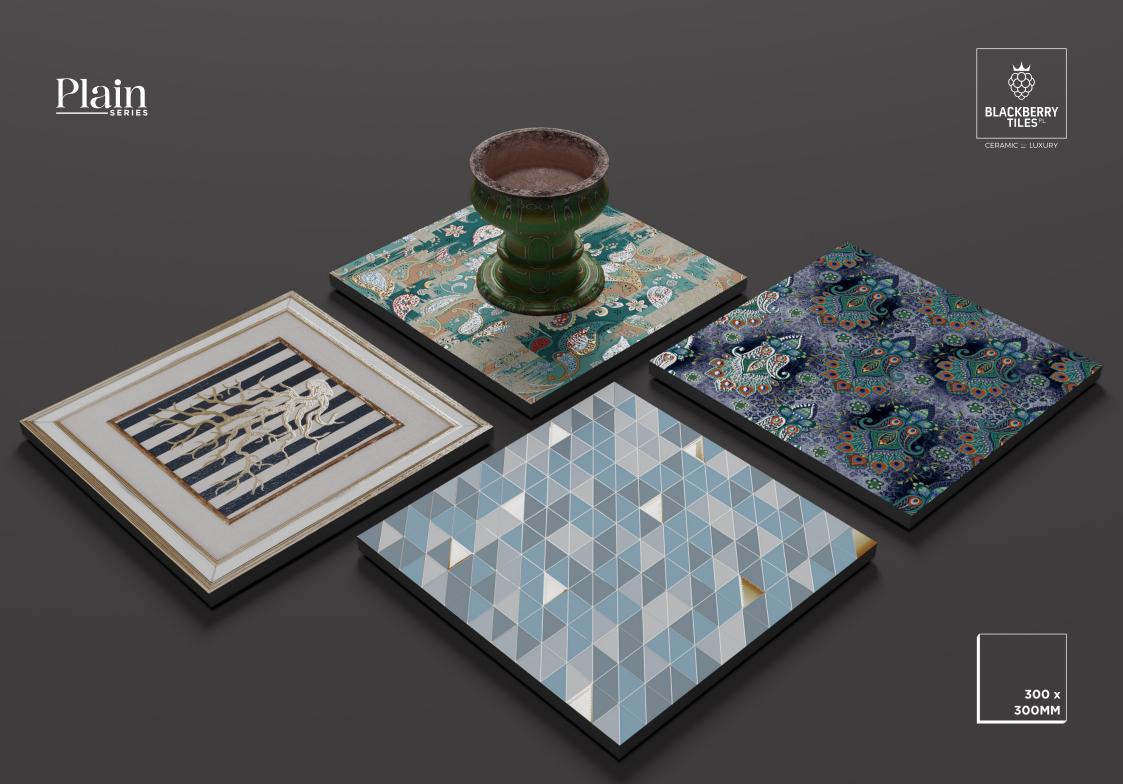







#### GLUE **705**

Finish:

Glue

Random:

3 face

















#### GLUE **706**

Finish:

Glue

Random:

1 face
































#### GLUE **708**

Finish:

Glue

Random:

1 face

















CERAMIC 🔄 LUXURY 300 x 300MM





CERAMIC for LUXURY



#### GLUE **709**

Finish:

Glue

Random:

1 face

















#### GLUE **710**

Finish:

Glue

Random:

1 face

















# GLUE **711**

Finish:

Glue

Random:

1 face

















# GLUE **712**

Finish:

Glue

Random:

1 face














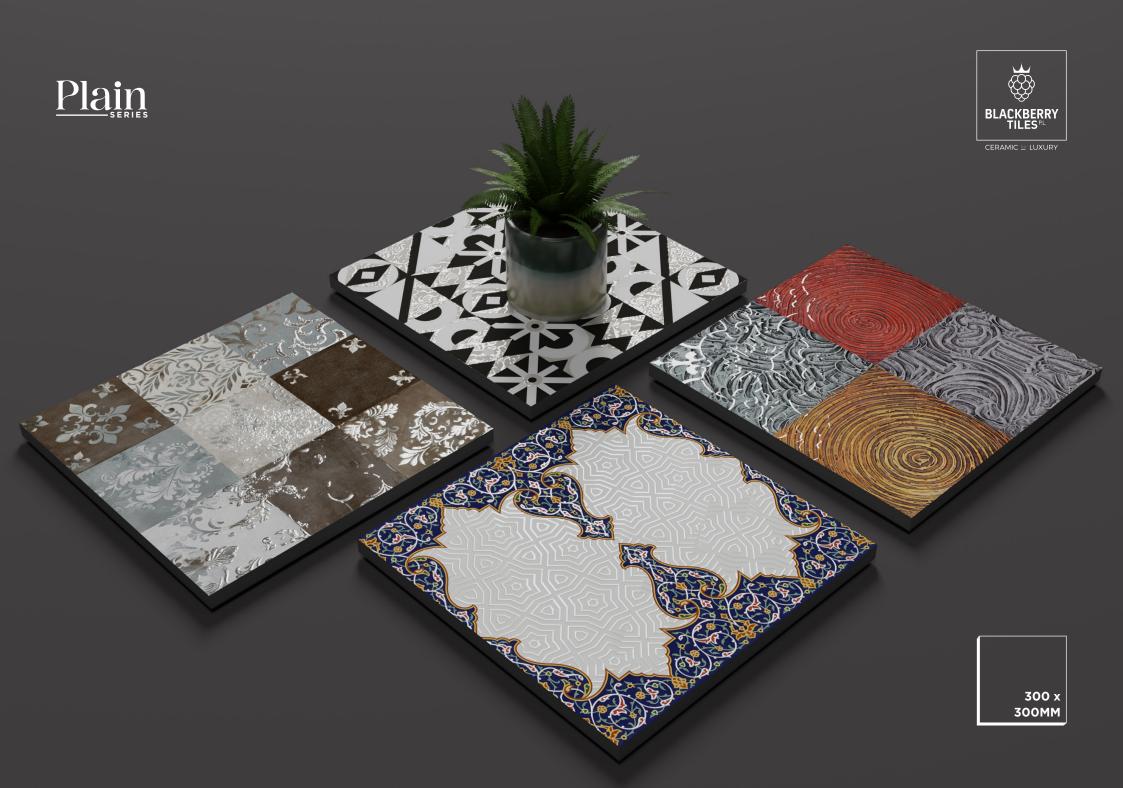







### GLUE **713**

Finish:

Glue

Random:

1 face















CERAMIC for LUXURY



Finish:

Random:














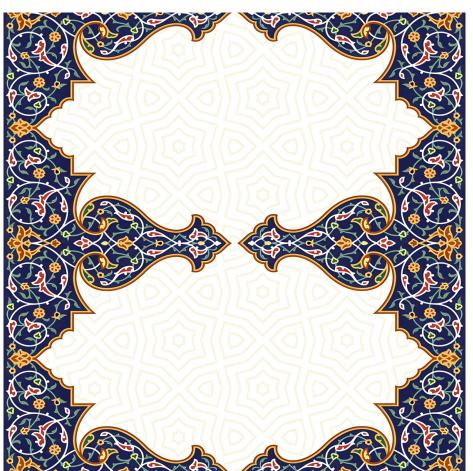


# GLUE **715**

Finish:

Glue

Random:

1 face

















### GLUE **716**

Finish:

Glue

Random:

2 face























### GLUE **717**

Finish:

Glue

Random:

1 face

















# GLUE **718**

Finish:

Glue

Random:

1 face

















# GLUE **719**

Finish:

Glue

Random:

4 face

















# GLUE **720**

Finish:

Glue

Random:

4 face


























### GLUE **721**

Finish:

Glue

Random:

5 face















CERAMIC for LUXURY




#### GLUE **722**

Finish:

Glue

Random:

6 face

















# GLUE **723**

Finish:

Glue

Random:

2 face















GLUE **724** 

Finish:

Glue

Random:

5 face


























### GLUE **725**

Finish:

Glue

Random:

6 face


















# GLUE **726**

Finish:

Glue

Random:

1 face

















# GLUE **727**

Finish:

Glue

Random:

1 face

















# GLUE **728**

Finish:

Glue

Random:

1 face














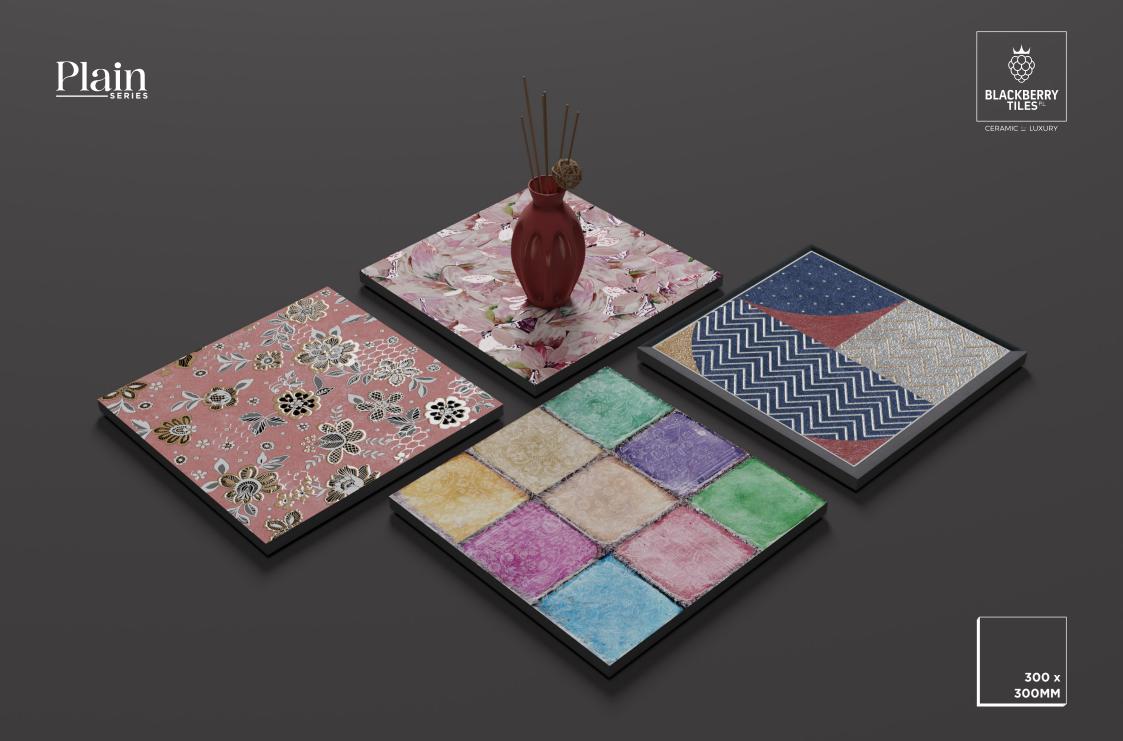








# GLUE **729**

Finish:

Glue

Random:

1 face















CERAMIC for LUXURY



### GLUE **730**

Finish:

Glue

Random:

1 face



300 x **300MM** 







R▲N D●M









### GLUE **731**

Finish:

Glue

Random:

1 face

















# GLUE **732**

Finish:

Glue

Random:

1 face

























# , GLUE **733**

Finish:

Glue

Random:

4 face

















# GLUE **780**

Finish:

Glue

Random:

6 face
















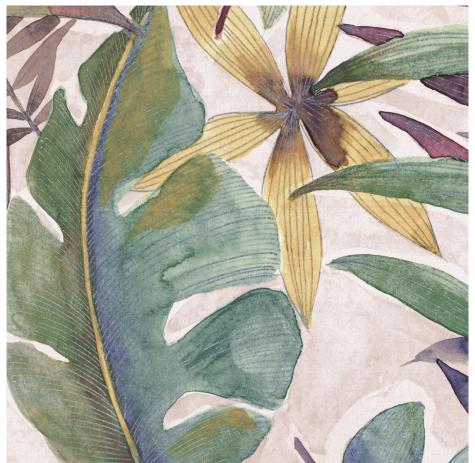

## GLUE **781**

Finish:

Glue

Random:

6 face

















## GLUE **782**

Finish:

Glue

Random:

6 face



























## GLUE **783**

Finish:

Glue

Random:

6 face

















## GLUE **784**

Finish:

Glue

Random:

6 face
















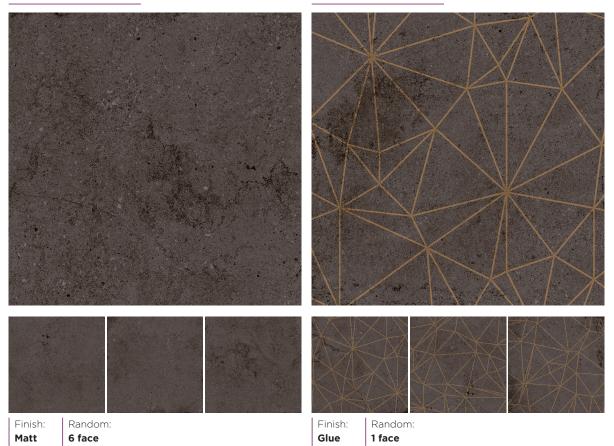














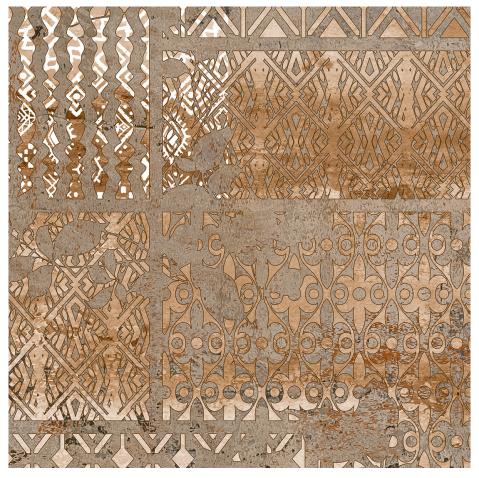


## GLUE **811**

Finish:

Glue

Random:

6 face


















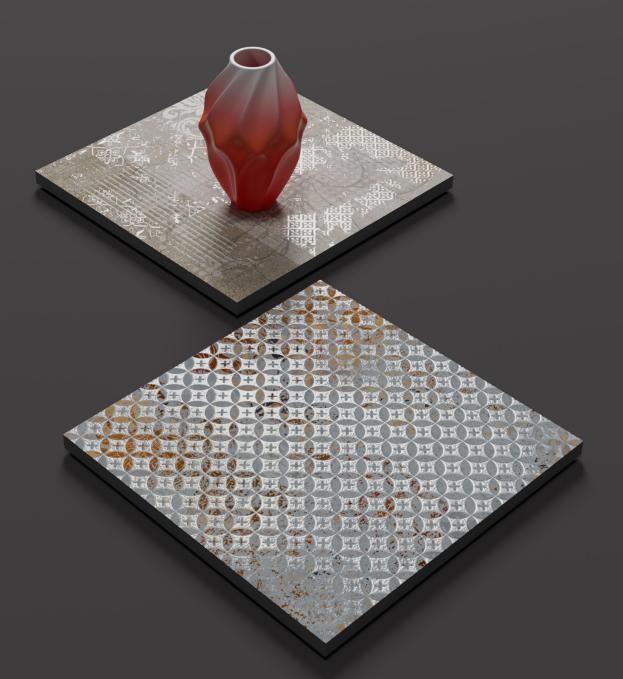





CERAMIC for LUXURY




## GLUE **812**

Finish:

Glue

Random:

6 face



300 x **300MM** 








RAN DOM







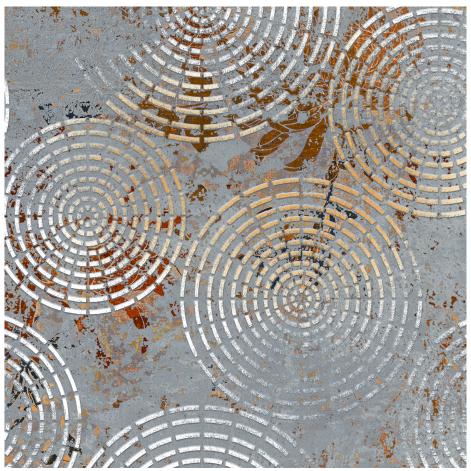

## GLUE **813**

Finish:

Glue

Random:

6 face









# Technical Specifications

Sr. No.	CHARACTERISTIC  EURO Standard EN-159/IS13759  BLACKBERRY Value		BLACKBERRY Value		
Dim	Dimension & Surface Quality				
1	Dimension & Surface Quality	0.5 %	0.4 %		
2	Deviation in thickness	0.6 %	0.3 mm		
3	Straightness of sides	0.3 %	0.2 %		
4	Rectangularity	0.5 %	0.3 %		
5	Surface flatness	0.5 %	0.3 %		
6	Surface Quality	Min. 95 %	Min. 96 %		

Physical Properties			
1	Water Absorption	>10%	12-15%
2	Bending Strength	>150 kg./Cm <sup>2</sup>	>150-180 kg./Cm <sup>2</sup>
3	Scratch Hardness (mohs scale)	Min. 3	Min. 3
4	Crazing Resistance	1 Cycle	No Crazing upto 4 Cycle

Chemical Properties			
1	Staining Resistance	Min. Class 2	Resistant to all Acids and Alkalies & Household Chemical,
2	Impact Resistance	Min. Class B	except Hydro Flouric Acid

Thermo Hydrometric Properties			
1	Thermal Shock Resistance	Resistant 10 Cycle	Conforms
2	Thermal Expansion	Max. 9E-06	Conforms

#### PACKING DETAILS

NOMI	VAL SIZE	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA / BOX	WEIGHT PER BOX
300 x	300 mm	10 mm	10 Pcs.	0.90 Sq. Mtr.	14.5 kg.

NOTES: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fming instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTE: Any Complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.



CERAMIC Or LUXURY

## Fixing Instructions




### **Tiles Fixing Instructions**

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
  - A: Use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
  - B: Apply 20-25MM of bedding materials over the floor area of 1.0 SQM at a time.
  - C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.

    Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after Laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.



Step-1
Surface Preparation



Step-2
Preparation of Subgrade



Step-3 Laying of tiles on the Surface



Step-4
Post Tiling Work

## Tile Laying, maintenance & Recommendations



### **Cleaning after Laying**

We suggest a good initial cleaning after the laying on the floor or wall, this is very important for removing residual grouting and the normal dirt coming from the building works.

We suggest the use of a cementitious descaler, that is a lightly acid product that doesn't emit fumes that are harmful for the user and that can attack joints. In case of material layed with epoxy or resinous grouting, we recommend to clean after laying with specific detergent.



### **Regular Maintenance**

For a good cleaning of the floor we suggest the use of a natural detergent with a high cleaning power. In case of strong dirty and encrusted by the time, we recommend to consult the following scheme to find the perfect solution to every situation

#### Recommendations

### **Drying Process**

Once the tiles have been grouted and any excess grout cleaned off, it is important to wait the stipulated time before using the tiled surface; in other words, any cleaning should wait until the tiled surface is completely dry. We recommend waiting 5 days before cleaning in readiness for full use.

### Damage Prevention

Measures should also be taken to protect the newly tiled surface against mechanical or chemical damage resulting from subsequent work by other professionals or later installations. Damage can be prevented by covering the floor tiles with thick cardboard or similar material.

### Protection from Liquid

The newly tiled surface must be protected from water and damp while the adhesive and grouting materials are maturing and hardening. This is particularly important in outside spaces and areas where there is a risk offreezing.

### **Cleaning Products**

For the final cleaning of the tiled surface, the products used should be compatible with the chemical resistance of the tiles. Avoid solid detergents with abrasive particles and solutions containing hydrofluoric acid, which attacks the glaze and causes irreversible damage to the ceramic tile.

TYPE OF DIRT	PRODUCT
Cement, Kalkstein, metal tracer, rust	Cementitious descaler
Residuals, stains and halos of epoxi joints	Epoxi descaler
Grease, tire marks, colours, marker, etc.	Non soap degrease
Grafitis	Acetone and antigraffiti star

## Size-able Showcase



The intricacies of size and design affect the whole outlook and we understand your concern about the size specifications quite well. Also, the design that's uniform and long-lasting has a greater impact on your investment. Choose Blackberry Tiles and you need not worry about anything. Just let us know what you need

1200 X 1800mm	GVT
800 X 1600mm	GVT
600 X 1200mm	GVT
600 X 600mm	GVT
300 X 600mm	CERAMIC WALL TILES
300 X 450mm	CERAMIC WALL TILES
300 X 300mm	CERAMIC WALL TILES / FLOOR TILES





## **BLACKBERRY TILES PVT. LTD.**

#### **Admin Office**

Jetpar Pipli Road, Sapar, Morbi-363642. Gujarat - INDIA

Customer Care No.: +91 90999 86724



