

300x450mm | WALL TILES | **KITCHEN**



A NEW ERA OF SURFACES



300x450mm

WALLTILES

GLOSSY KITCHEN COLLECTION

A New Era of Surfaces

SUITABLE for WALL



KITCHEN

WALL TILES | 300x450mm



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1501-G
H2 SRBL-1501-G-RANDOM



L SRBL-1501-G
H4 SRBL-1501-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1502-G
HI SRBL-1502-G-RANDOM



L SRBL-1502
H3 SRBL-1502-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch




L SRBL-1503-G
HI SRBL-1503-G-RANDOM



L SRBL-1503-G
H3 SRBL-1503-G-RANDOM



L SRBL-1503-G
H5 SRBL-1503-G-RANDOM

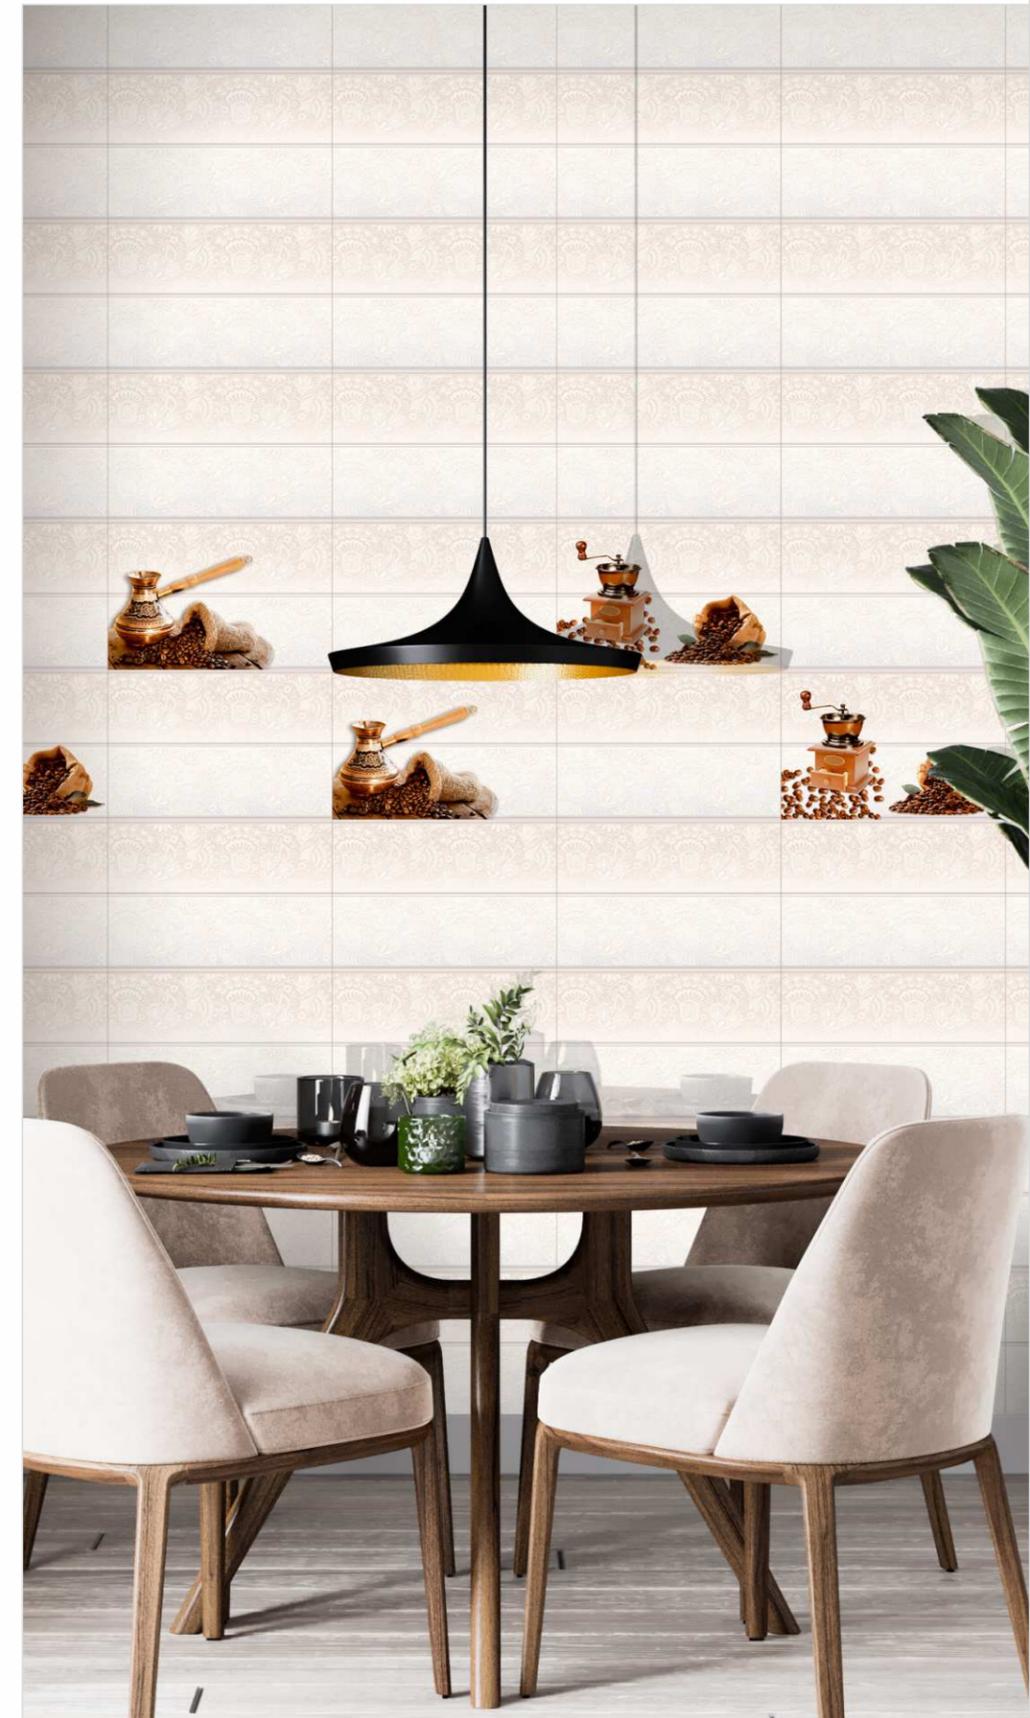

KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1504-G
H3 SRBL-1504-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1505-G
HI SRBL-1505-G-RANDOM



L SRBL-1505-G
H3 SRBL-1505-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1506-G
HI SRBL-1506-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



- L SRBL-1507-G
- HI SRBL-1507-G-RANDOM
- D SRBL-1507-G



KITCHEN COLLECTION

300x450mm/12x18 inch



H1 SRBL-1508-G-RANDOM
H3 SRBL-1508-G



KITCHEN COLLECTION

300x450mm/12x18 inch



- L SRBL-1509-G
- HI SRBL-1509-G-RANDOM
- D SRBL-1509-G



KITCHEN COLLECTION

300x450mm/12x18 inch



- L SRBL-1510-G
- HI SRBL-1510-G-RANDOM
- D SRBL-1510-G



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1511-G
HI SRBL-1511-G-RANDOM




KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1512-G
HI SRBL-1512-G-RANDOM

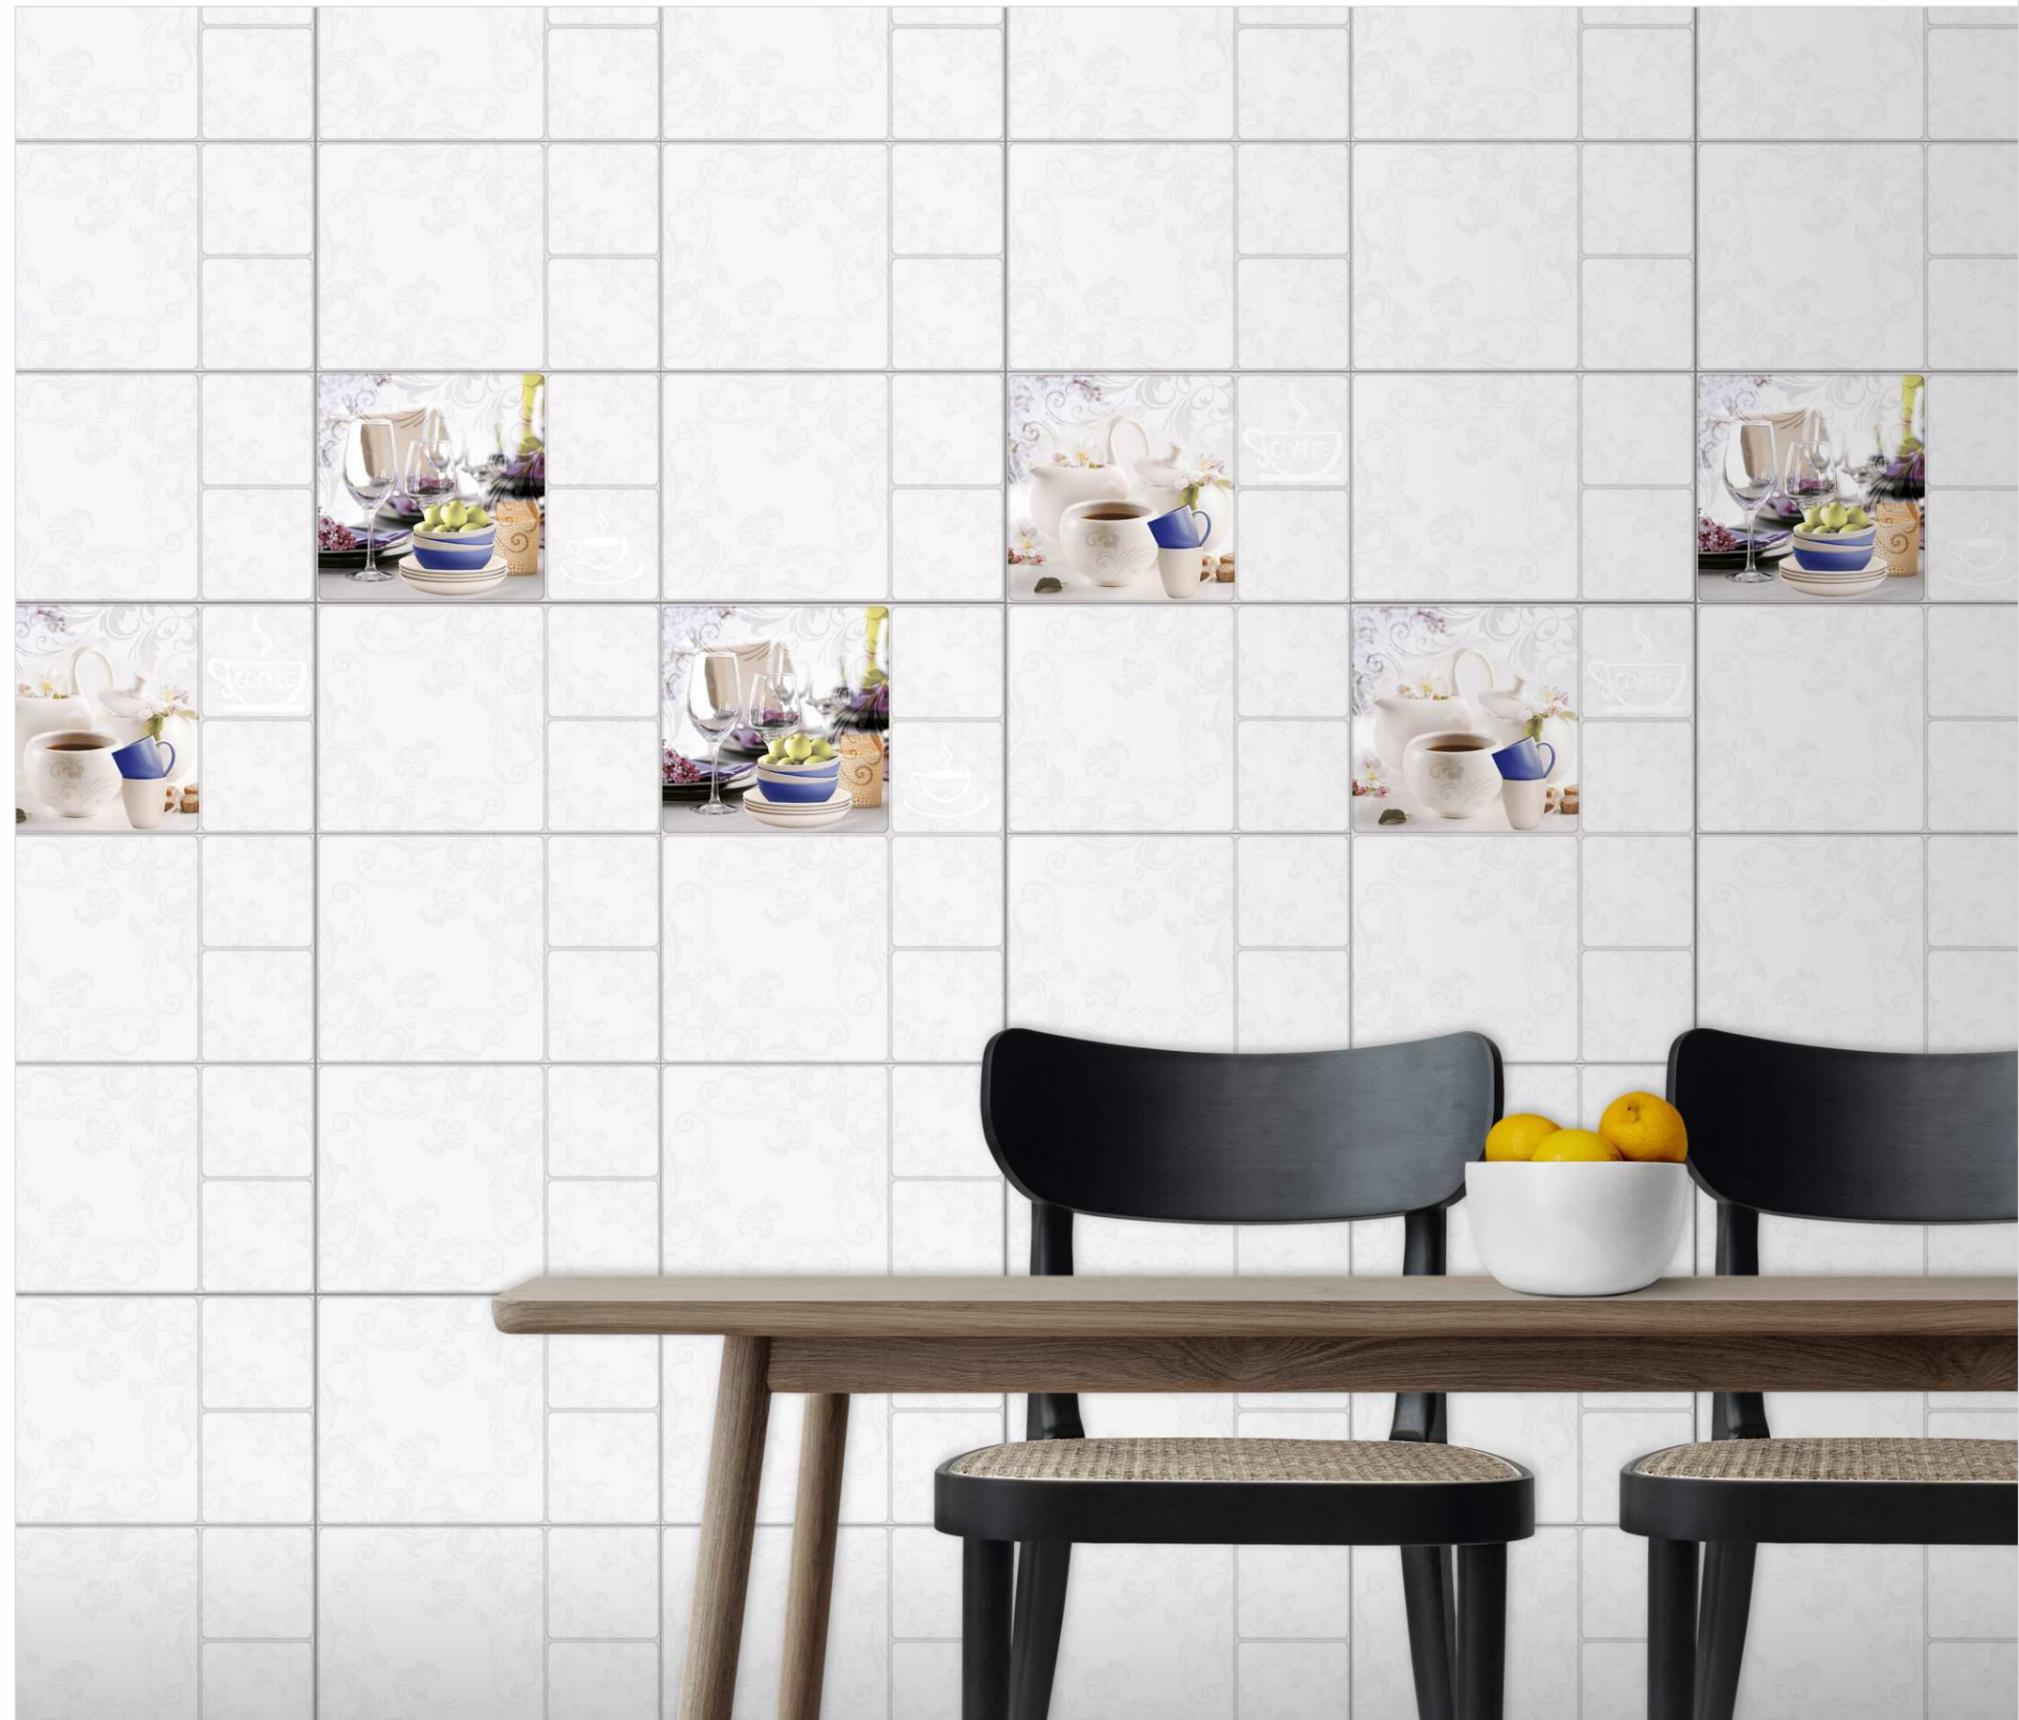

KITCHEN COLLECTION

300x450mm/12x18 inch




- L SRBL-1513-G
- HI SRBL-1513-G-RANDOM
- D SRBL-1513-G



KITCHEN COLLECTION

300x450mm/12x18 inch

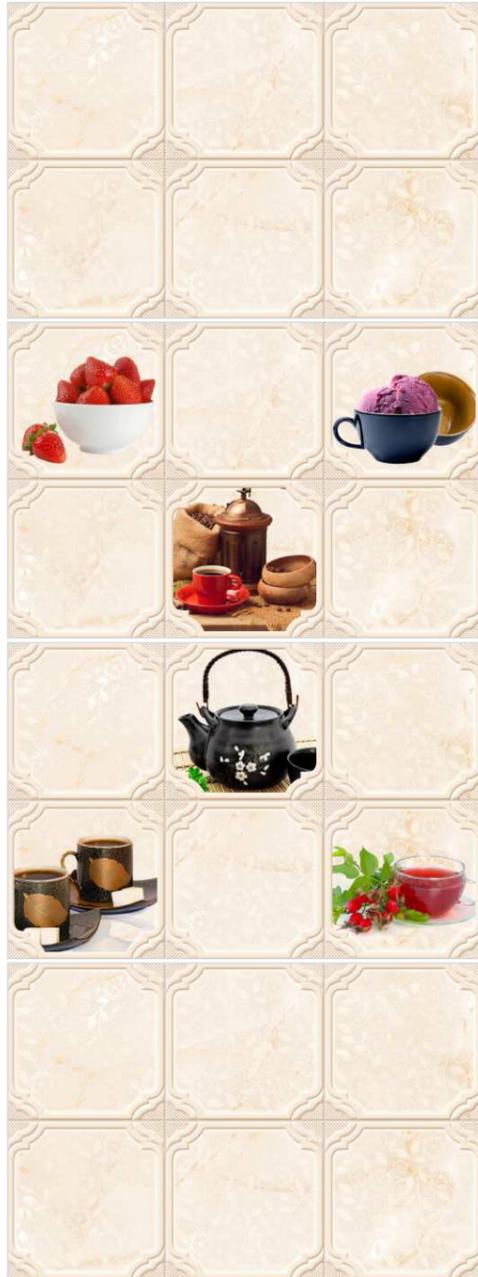

L SRBL-1514-G
HI SRBL-1514-G-RANDOM




KITCHEN COLLECTION

300x450mm/12x18 inch




L SRBL-1515-G
HI SRBL-1515-G-RANDOM

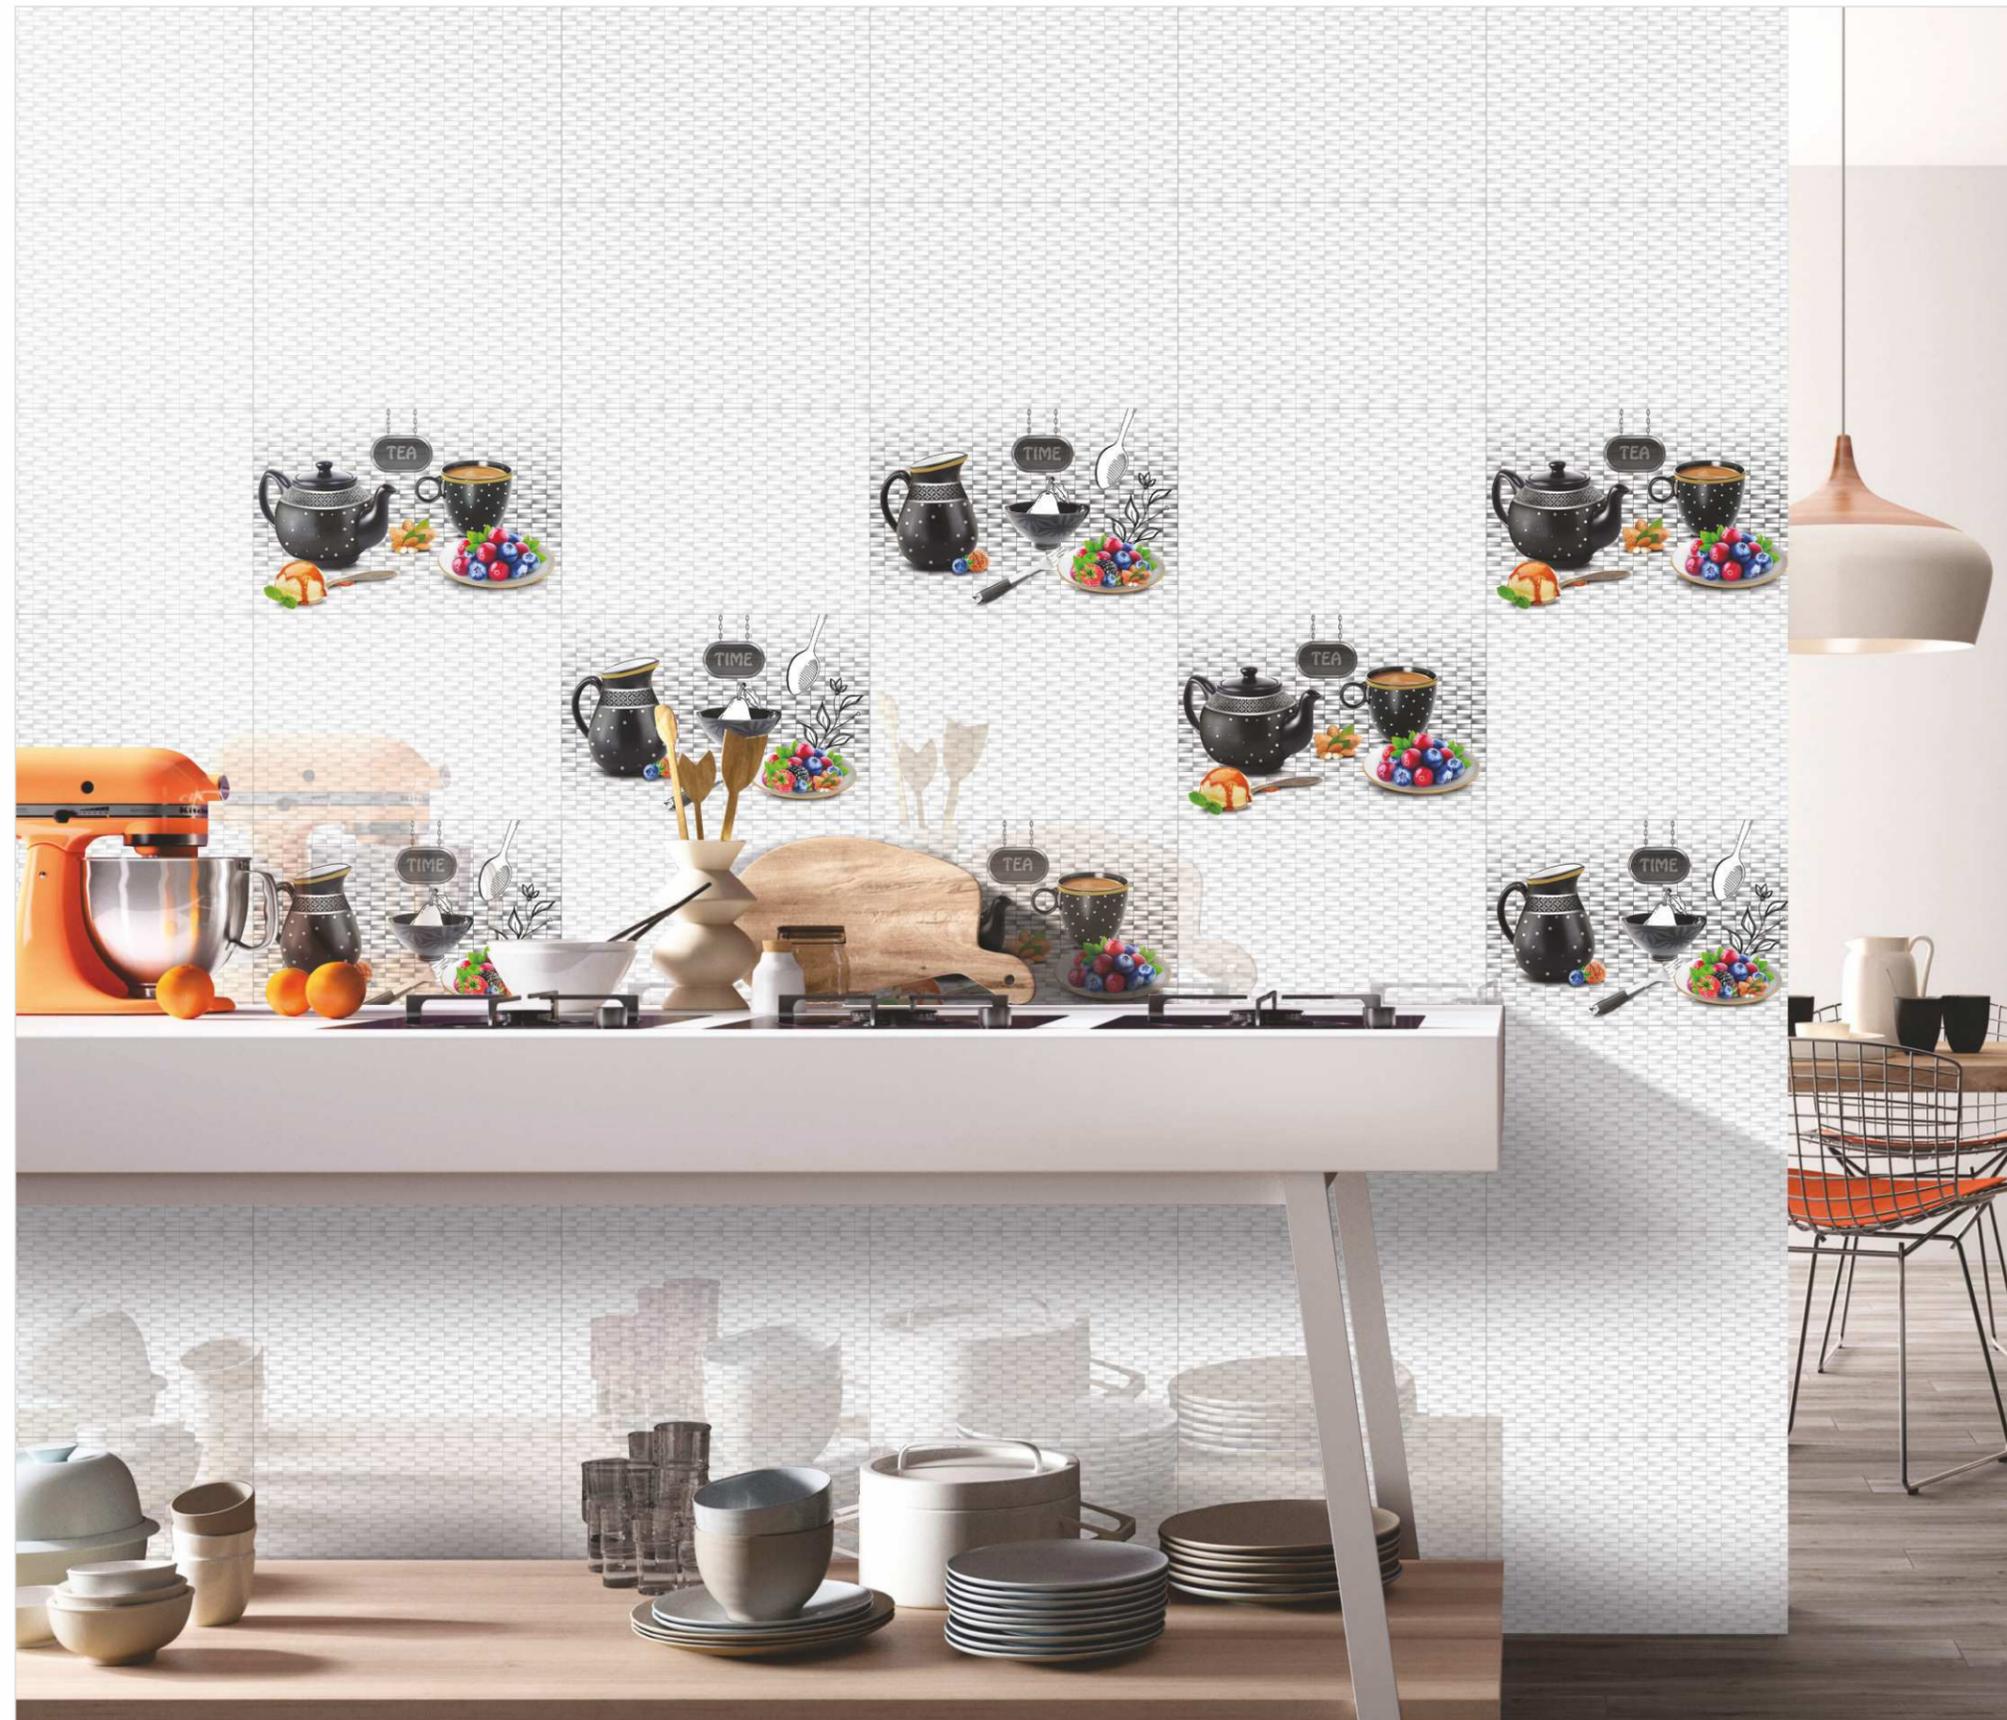

KITCHEN COLLECTION

300x450mm/12x18 inch

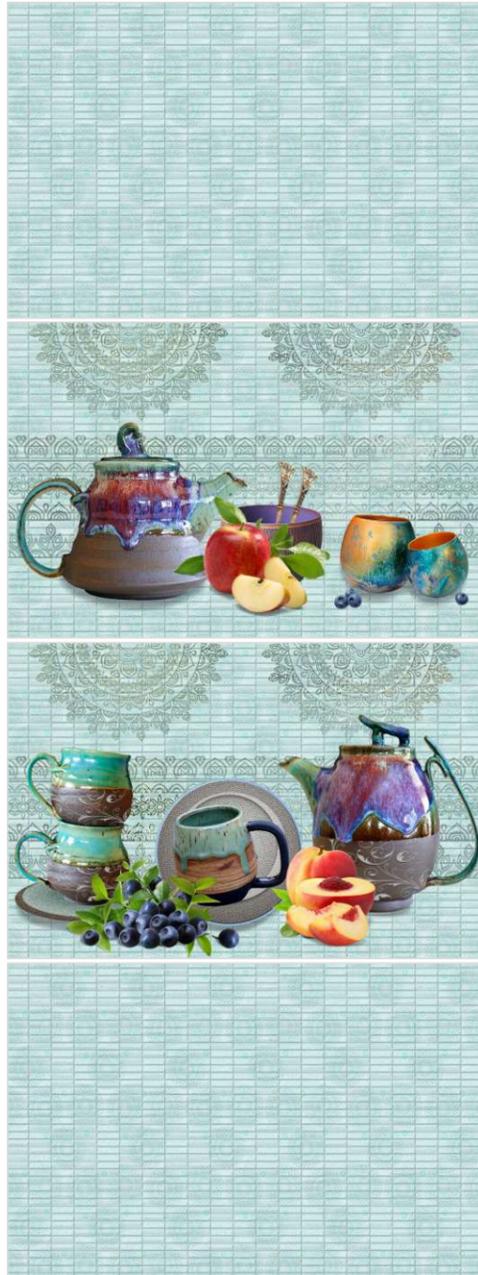

HI SRBL-1516-G
D SRBL-1516-G-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1517-G
H3 SRBL-1517-G-RANDOM



L SRBL-1517-G
H4 SRBL-1517-G-RANDOM





300x450mm

WALLTILES

REACTIVE KITCHEN COLLECTION

A New Era of Surfaces

SUITABLE for WALL

KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1551-G
HI SRBL-1551-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch




HI SRBL-1552-R-RANDOM
D SRBL-1552-G



KITCHEN COLLECTION

300x450mm/12x18 inch

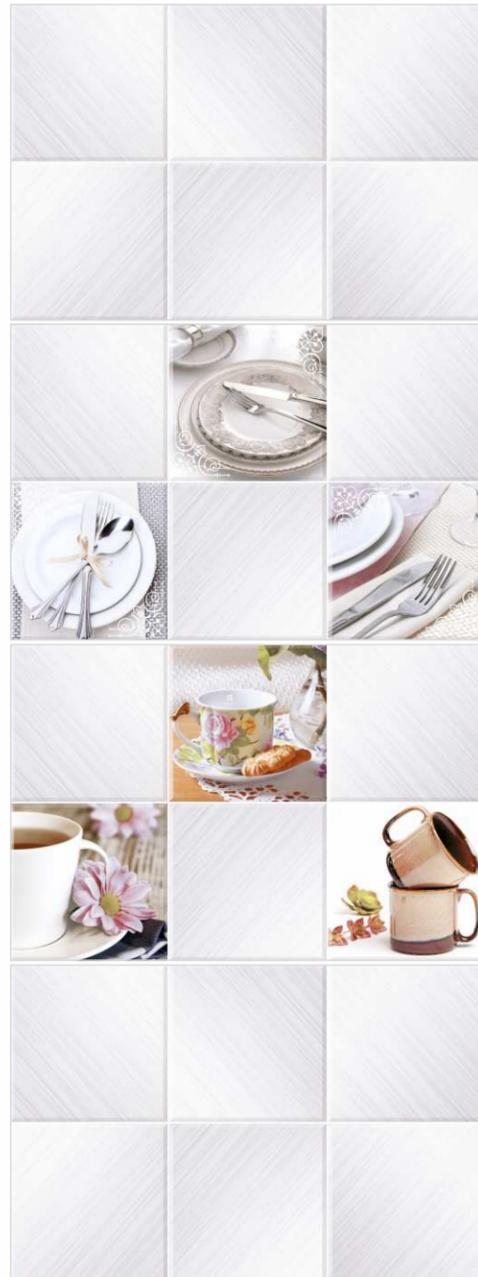

L SRBL-1553-G
HI SRBL-1553-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1554-G
HI SRBL-1554-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1555-G
HI SRBL-1555-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1556-R
HI SRBL-1556-R-RANDOM



L SRBL-1556-R
H3 SRBL-1556-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1557-R
HI SRBL-1557-R-RANDOM
D SRBL-1557-R



L SRBL-1557-R
H3 SRBL-1557-R-RANDOM
D SRBL-1557-R



L SRBL-1557-R
H5 SRBL-1557-R-RANDOM
D SRBL-1557-R



KITCHEN COLLECTION

300x450mm/12x18 inch




- L SRBL-1558-R
- HI SRBL-1558-R-RANDOM
- D SRBL-1558-R



KITCHEN COLLECTION

300x450mm/12x18 inch

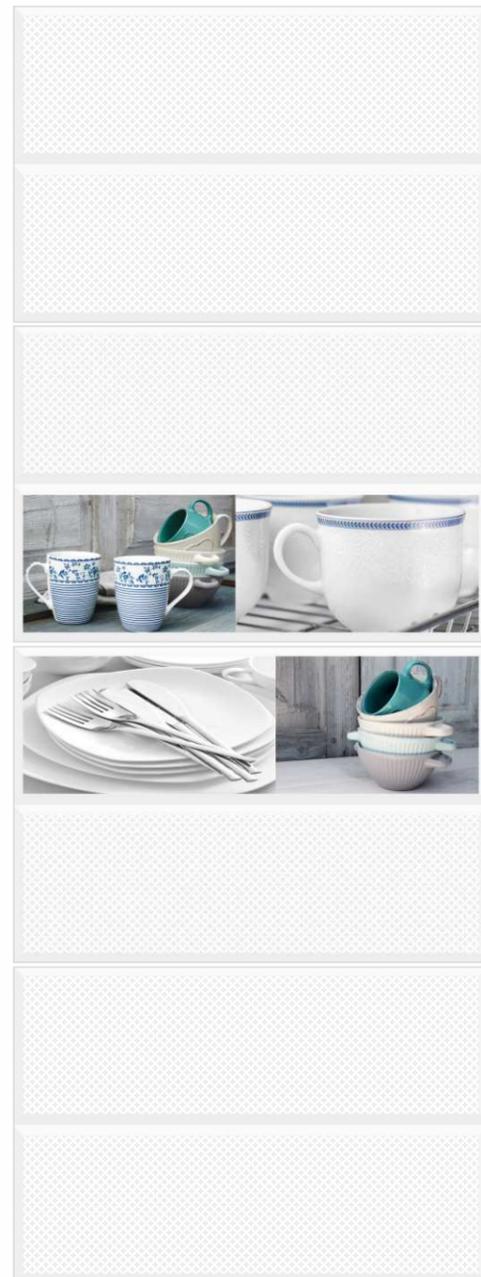

L SRBL-1559-R
HI SRBL-1559-R-RANDOM



H3 SRBL-1559-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1560-R
HI SRBL-1560-R-RANDOM
D SRBL-1560-R



L SRBL-1560-R
H3 SRBL-1560-R
H4 SRBL-1560-R
D SRBL-1560-R



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1561-R
HI SRBL-1561-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1562-R
HI SRBL-1562-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



L SRBL-1563-R
HI SRBL-1563-R-RANDOM



KITCHEN COLLECTION

300x450mm/12x18 inch



- L SRBL-1564-R
- HI SRBL-1564-R-RANDOM
- D SRBL-1564-R



Technical Specifications

Sr. No.	CHARACTERISTIC	EURO Standard EN-159/IS13759	BLACKBERRY Value
Dimension & Surface Quality			
1	Dimension & Surface Quality	0.5 %	0.4 %
2	Deviation in thickness	0.6 %	0.3 mm
3	Straightness of sides	0.3 %	0.2 %
4	Rectangularity	0.5 %	0.3 %
5	Surface flatness	0.5 %	0.3 %
6	Surface Quality	Min. 95 %	Min. 96 %

Physical Properties			
1	Water Absorption	>0.10%	12-15%
2	Bending Strength	>150 kg./Cm ²	>150-180 kg./Cm ²
3	Scratch Hardness (mohs scale)	Min. 3	Min. 3
4	Crazing Resistance	1 Cycle	No Crazing upto 4 Cycle

Chemical Properties			
1	Staining Resistance	Min. Class 2	Resistant to all Acids and Alkalies & Household Chemical, except Hydro Flouric Acid
2	Impact Resistance	Min. Class B	

Thermo Hydrometric Properties			
1	Thermal Shock Resistance	Resistant 10 Cycle	Conforms
2	Thermal Expansion	Max. 9E-06	Conforms

PACKING DETAILS


NOMINAL SIZE	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA / BOX
300 x 450 mm	8.2 mm (Approx)	6 Pcs.	8.71 Sq. Ft.
300 x 300 mm	8.2 mm (Approx)	9 Pcs.	8.71 Sq. Ft.

NOTES: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fming instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTE: Any Complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.



Matching Floor Tiles of 300 x 300 mm available in Matte Finish for all Designs

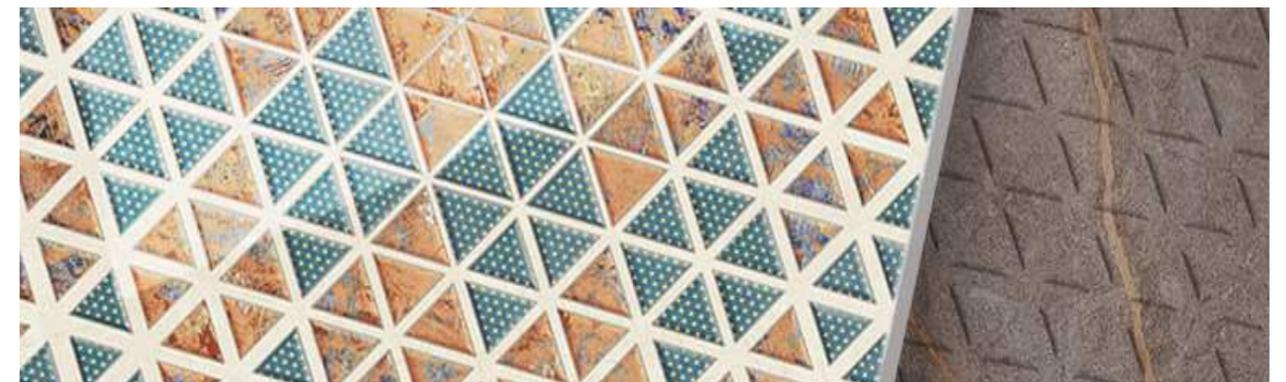

Facility to Have All Designs in Matte/Gloss Finished with/without Punch

TILES FIXING INSTRUCTIONS

1. Plaster the surface of the floor where the tiles will be laid with smooth finish and complete the plastering and curing at least two weeks prior to laying. 2. Before fixing BLACKBERRY tiles, lay them out in the desired pattern and make sure that they give an acceptable blend of colour. Please note that certain amount of shade variation is inherent in the manufacture of fully Vitrified ceramic tiles. THE COMPANY WILL BEAR NO LIABILITY AFTER THE TILES ARE FIXED. 3. The company bears no responsibility towards the tiles exposed to any outside process like transfers, printing, firing etc. 4. For fixing BLACKBERRY tiles we recommend the use of tile fixing adhesives for best results. Also follow the fixing instructions provided along with the adhesives. 5. For fixing BLACKBERRY tiles on the floor, using sand and cement, follow the instructions given below: (a) Use cement and sand mortar in the ratio of 1:4. Add some water to create a consistent paste. (b) Once the mixing has completed do not add any further water and use the same within one hour. (c) Apply a 20-30 mm, layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and full bedding. Press gently for even adherence at the back of the tile. DO NOT USE AN IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILE. 6. For fixing BLACKBERRY tiles on Dado, we recommend the use of tile fixing adhesive with proper troweling method for 100 per cent coverage behind the tiles and for peerless bonding. Please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on Dado. 7. Make and lay out the tiles from the center of the area to be laid so that cut tiles, if any, will be on the outer edges towards the walls. 8. The work size which we try to maintain for better technical performance is 300mm x 600mm, 300mm x 300mm on average. It is advisable to maintain a gap of 1 mm to 2 mm between every two tiles to allow for possible expansion as per BIS/EN tolerance norms. 9. Complete the laying process by pressing the cut BLACKBERRY tiles firmly into place along the walls/floors. 10. Allow 3-4 days for bed curing. After this period fill the joints with grouts. Usage of grout sealant is recommended for keeping the grout free of dust. 11. Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be cleaned with a mild acid (However, Hydrofluoric acid and its derivatives should not be used). 12. Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

Kindly look for the arrow (➡) on the back of the tile and follow the laying pattern as shown in Pic-1:



OR

Nothing in these instructions is a Substitute for Good Workmanship and Supervision

Size-able Showcase



The intricacies of size and design affect the whole outlook and we understand your concern about the size specifications quite well. Also, the design that's uniform and long-lasting has a greater impact on your investment. Choose BlackBerry Tiles and you need not worry about anything. Just let us know what you need

1200 x 2400mm	GVT
800 x 2400mm(15mm)*	GVT
1200 x 1800mm*	GVT
800 x 1600mm	GVT
260 x 1600mm	WOODEN GVT
600 x 1200mm	GVT
195 x 1200mm	WOODEN GVT
600 x 600mm	GVT
600 x 900mm(16mm)*	OUTDOOR GVT
600 x 600mm(16mm)*	OUTDOOR GVT
300 x 600mm	CERAMIC WALL TILES
300 x 450mm	CERAMIC WALL TILES
300 x 300mm	CERAMIC WALL/FLOOR TILES



*upcoming



BLACKBERRY TILES PVT. LTD.

Admin Office

Jetpar Pipli Road, Sapar, Morbi-363642. Gujarat - INDIA

Gvt Plant:

Morbi-Halvad Road, At. Unchi Mandal, Morbi-363641. Gujarat, India.

Customer Care No.: +91 90999 86724



Click for visit:
www.blackberrytiles.com

Super Made
in India 