

Matt
SERIES



**BLACKBERRY
TILES** P.L.

CERAMIC for LUXURY




300 x
600MM



www.blackberrytiles.com

Explore the Creative World of Ceramic Art

Blackberry is a uprising manufacturer and exporter of all type of ceramic tiles. We are rooted in India, creating products in-line with contemporary trends of architecture to deliver excellent experiences and lavish all across the world with our vogueish surfaces.

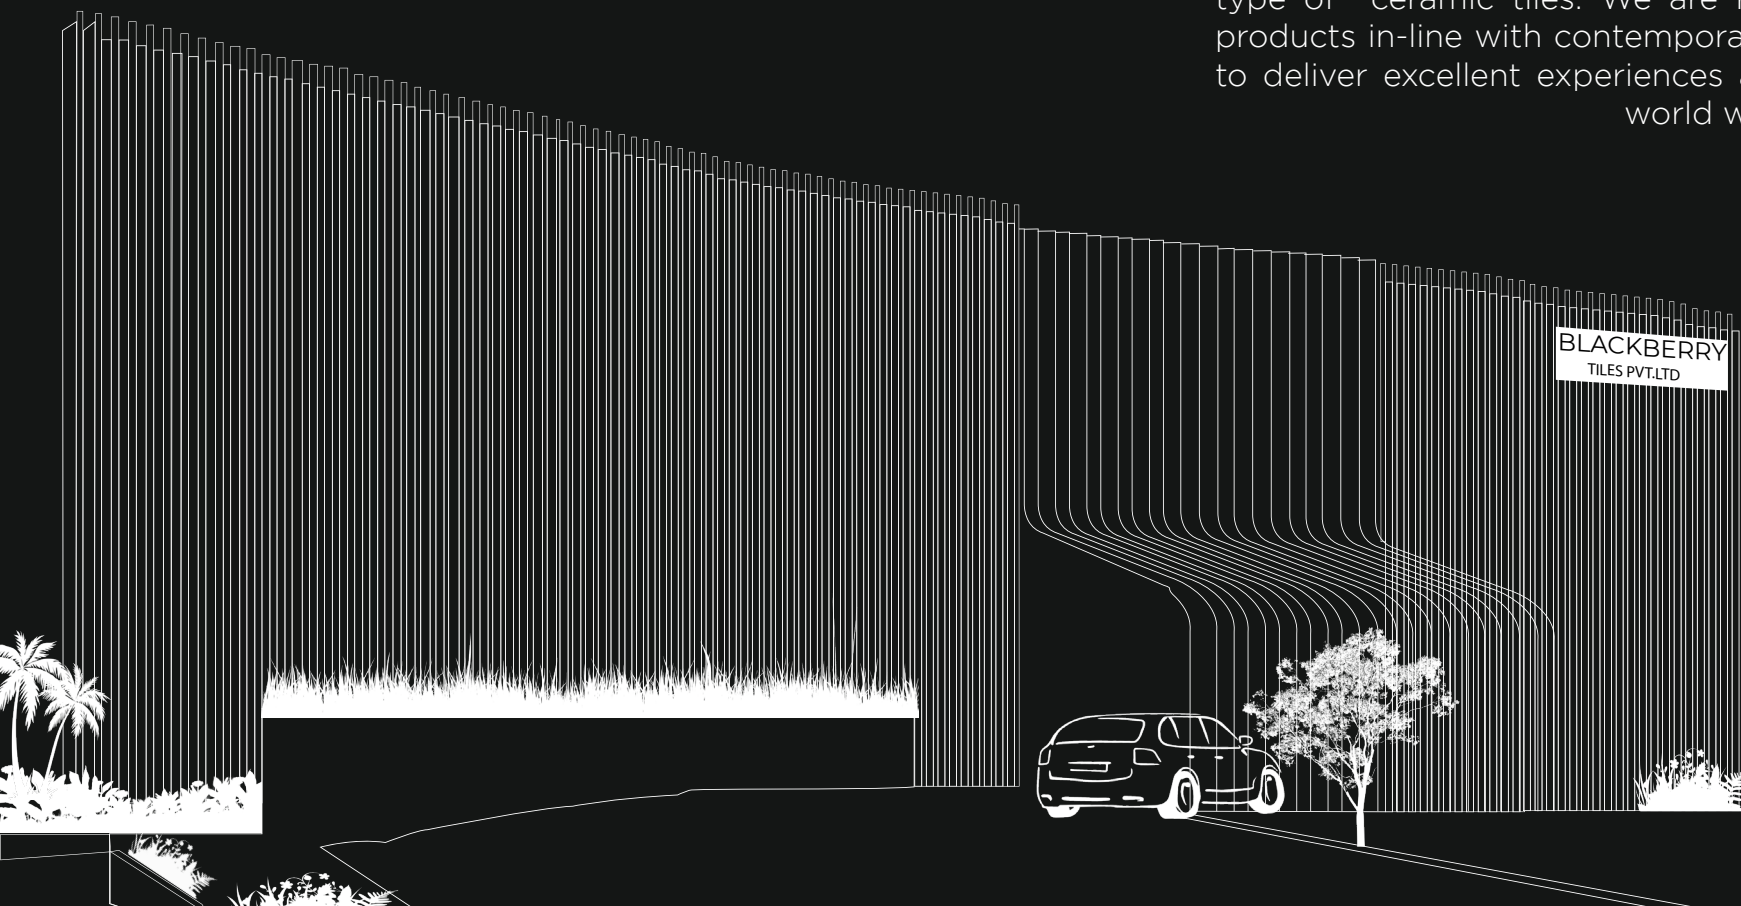

DISPLAY AREA
35K sq.ft

PRODUCTION CAPACITY
25K box per day

BUILDING AREA
65K sq. mtrs

LAND AREA
92K sq. mtrs



EASY TO CLEAN

Matte surface tiles are exempt from frequent cleaning due to the best concealing of smudges and stains.

CHEMICAL RESISTANT

Our chemical-resistant tiles provide great durability against abrasion, anti-skid qualities for worker safety, and an attractive appearance.

SCRATCH RESISTANT

When it comes to the scratch resistance feature, it will win the top spot. A Matte surface prevents scratches.

FROST RESISTANT

Frost-resistant tiles are not damaged by extremely low temperatures. tile has the ability to endure freeze/thaw temperatures without significant harm.

STAIN RESISTANT

The most appealing aspect of matt finish tiles is that they require no maintenance.



300 x
600MM


www.blackberrytiles.com

Matt

SERIES

Masters of contemporary home styles

Inspired by the likeliness of natural marble,
the matt surface offers numerous options
your interior decoration





DENMARK
CREMA



SR BL 1002



SR BL 1076




SR BL 1086




SAMARA



SR BL 1071

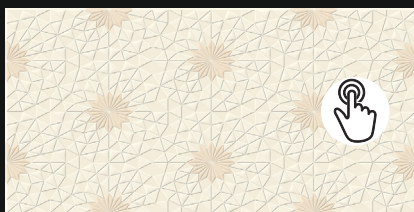

SR BL 1077

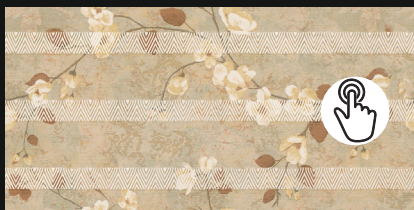

SR BZ 3026



SR BL 1001



SR BL 1075

Finish:
Matt

Size:
300 x 600MM


WIDE RANGE



Matt
SERIES

300 x
600MM

Matt
SERIES

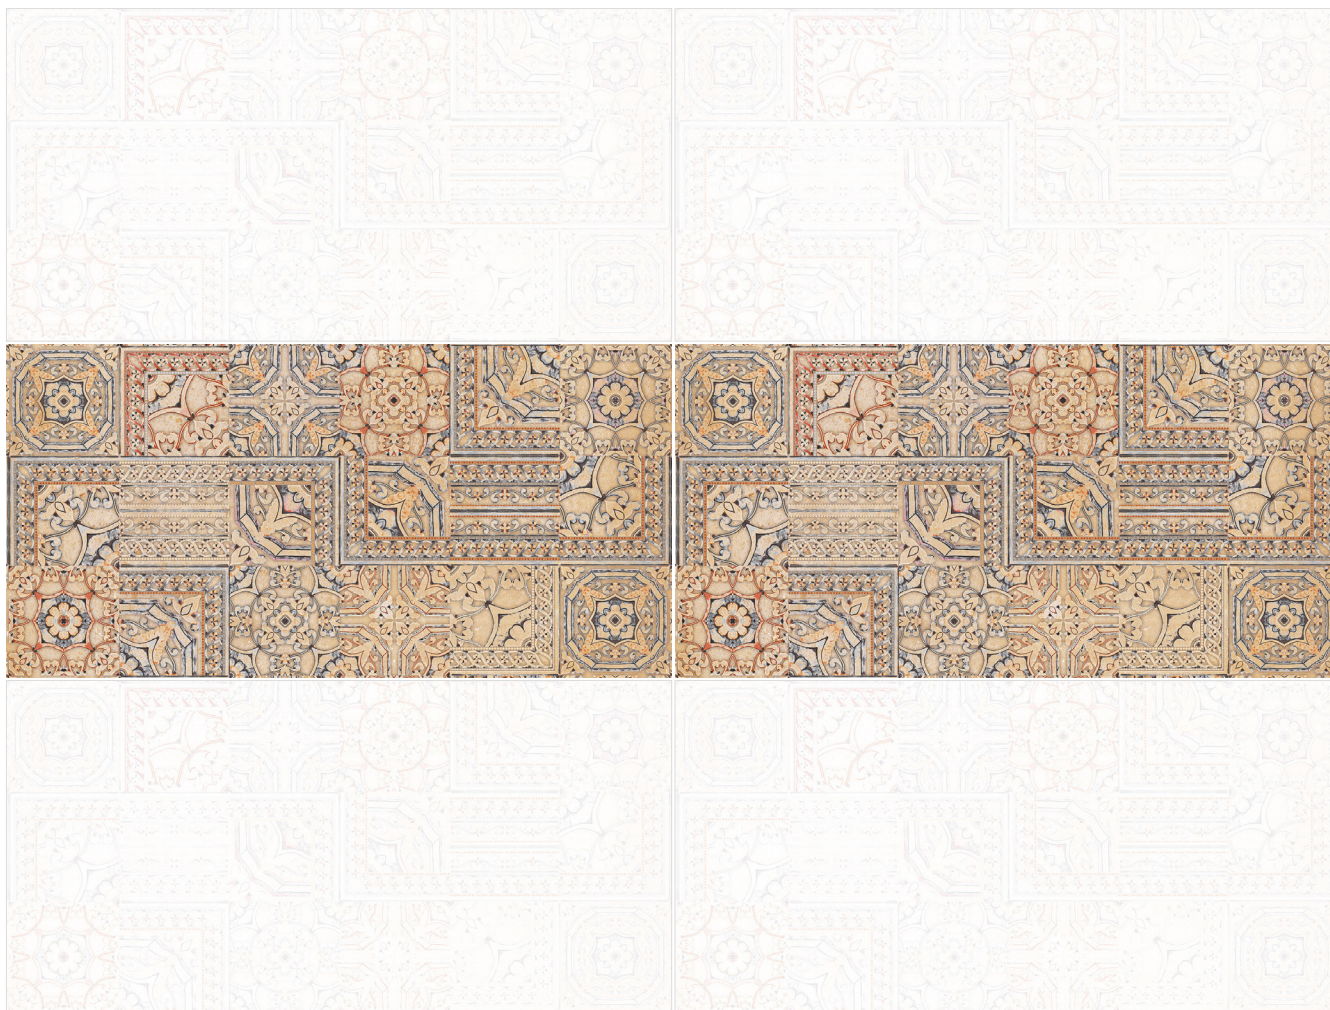

DENMARK CREMA LT
DENMARK CREMA HL

RANDOM

DENMARK CREMA

Finish:
Matt


Size:
300 x 600MM

Random:
2 face



DENMARK CREMA FL
Finish: **Antiskid Matt** **300 x 300mm**



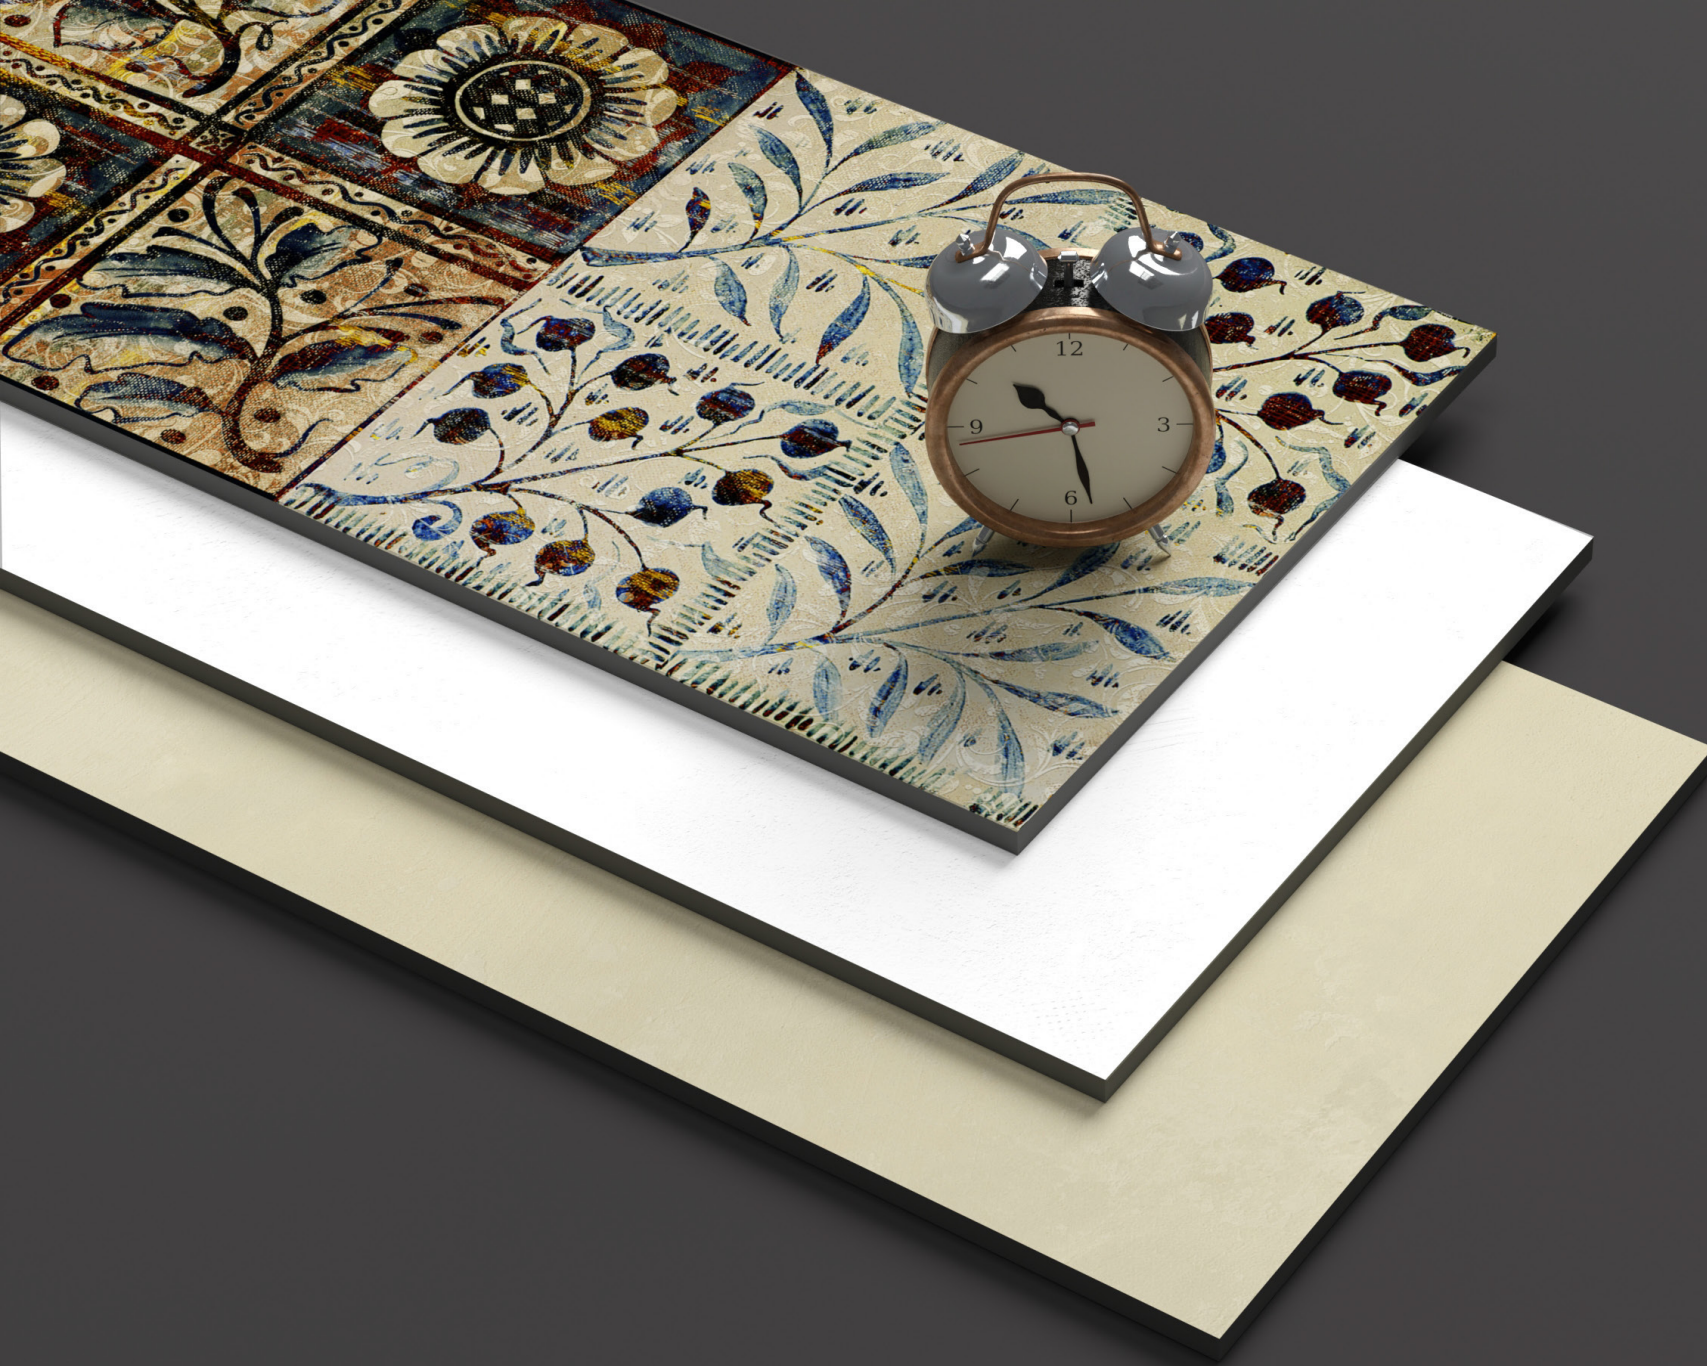

Matt
SERIES

300 x
600MM

Matt
SERIES



SAMARA LT
SAMARA HL
SAMARA DK

RANDOM

SAMARA

Finish:
Matt

Size:
300 x 600MM


Random:
1 face



SAMARA FL
Finish: **Antiskid Matt**

**300 x
300mm**



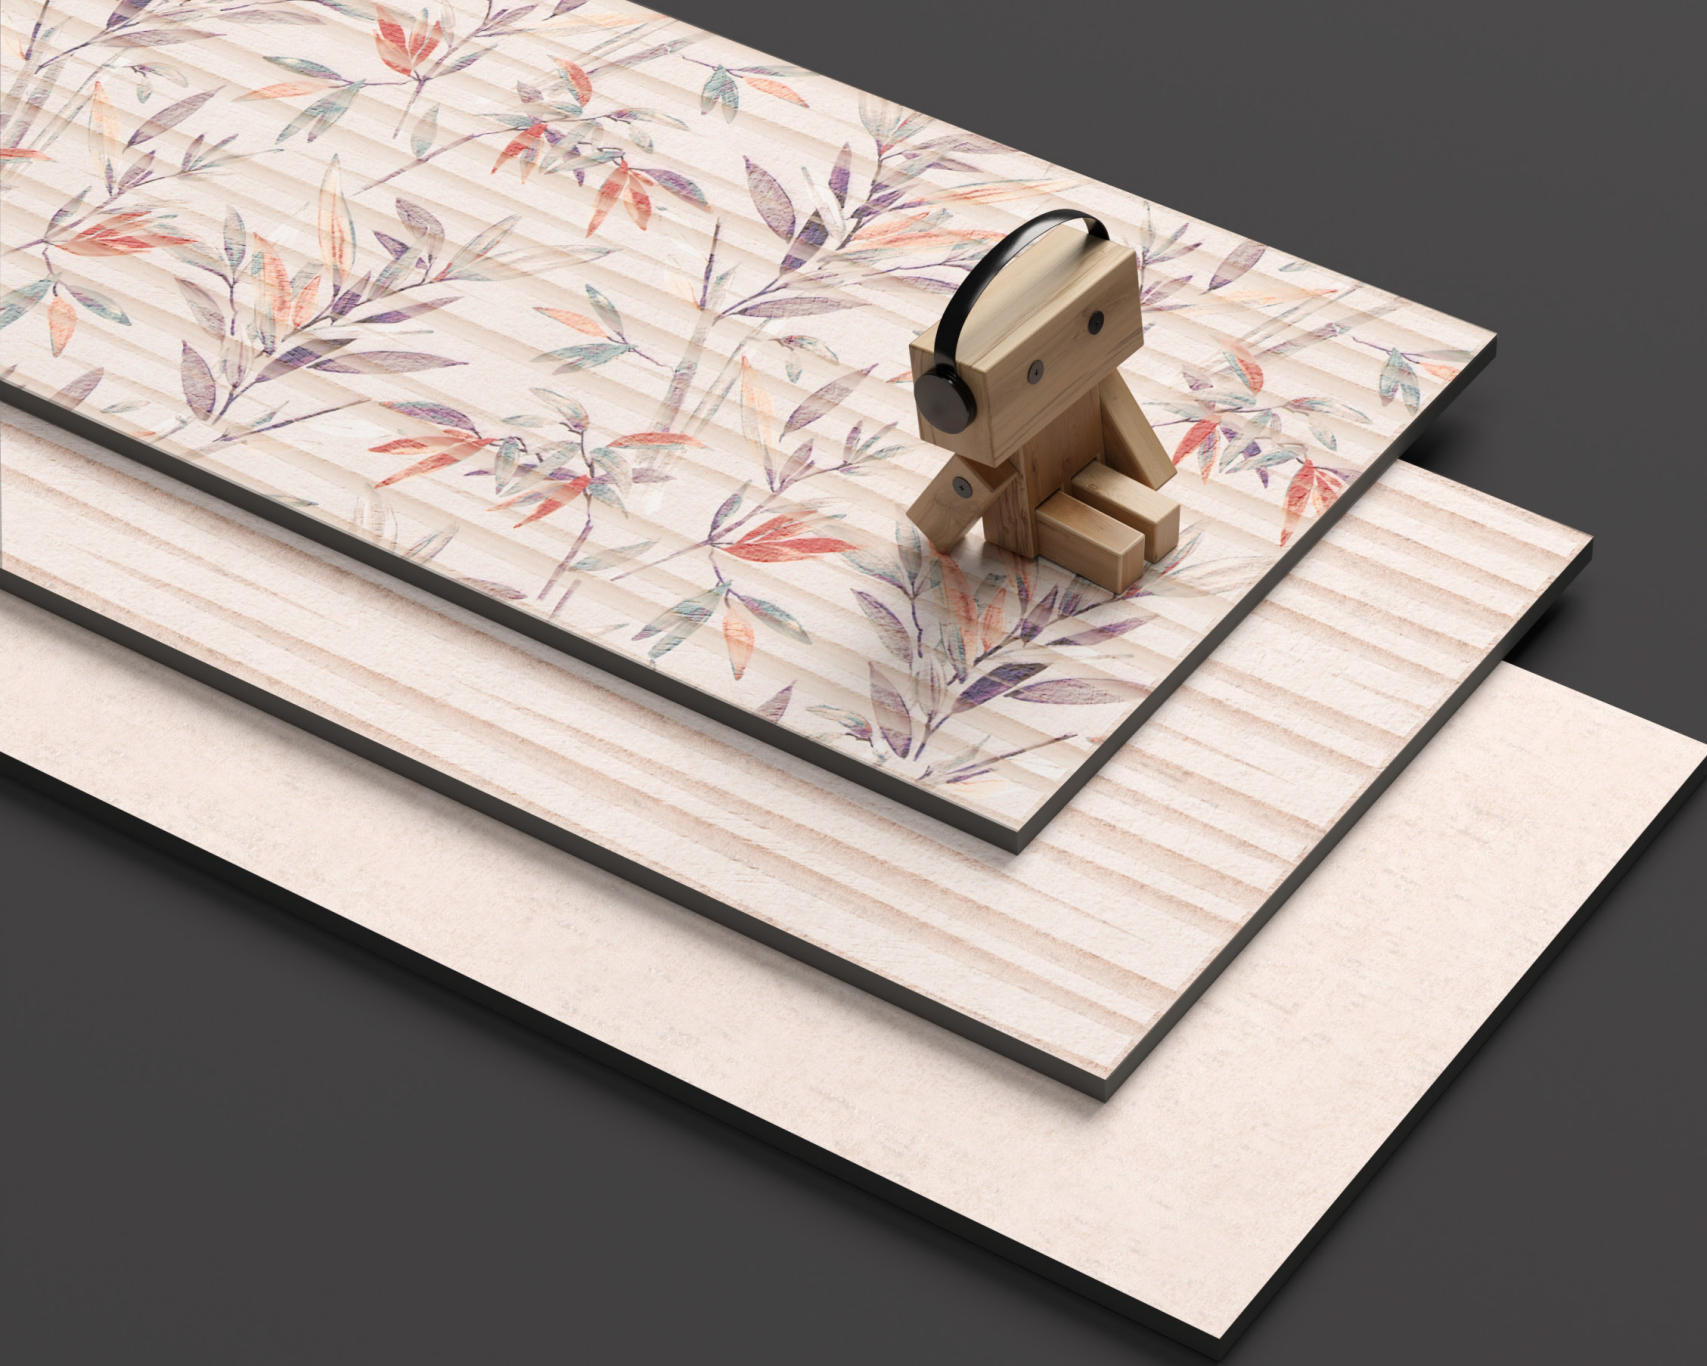

Matt
SERIES

300 x
600MM


Matt

SERIES



SR BL 1002 LT
SR BL 1001 HL

RANDOM

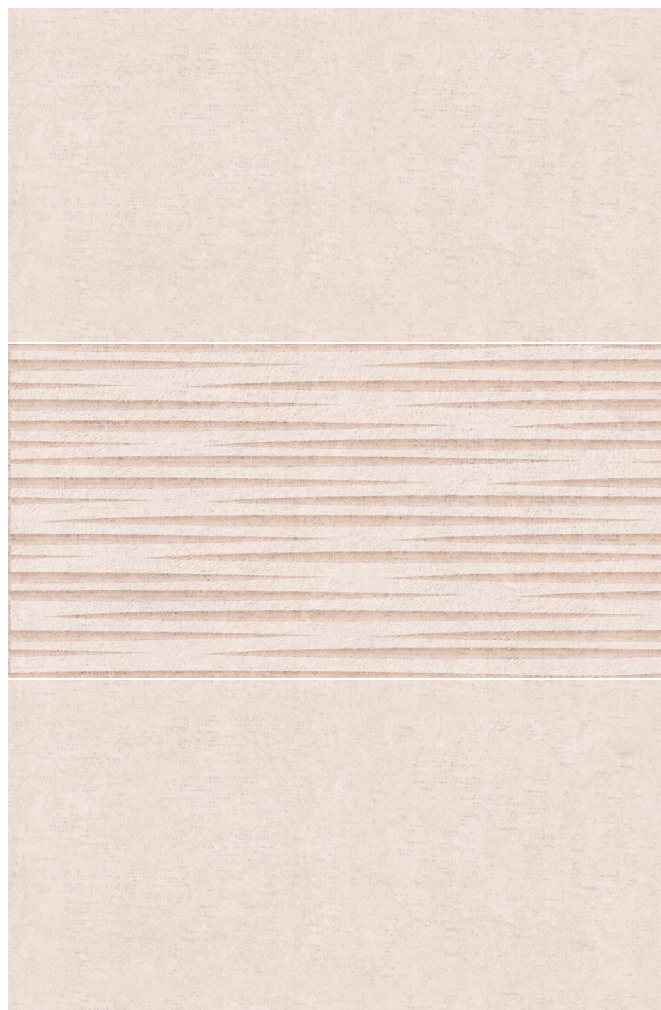

SR BL 1002 LT
SR BL 1002 HL

RANDOM

SR BL 1001

Finish:
Matt

Size:
300 x 600MM

Random:
1 face



SR BL 1002 FL
Finish: **Antiskid Matt**

**300 x
300mm**





Matt
SERIES

300 x
600MM

Matt
SERIES



SR BL 1071 LT
SR BL 1071 HL

RANDOM

SR BL 1071

Finish:
Matt

Size:
300 x 600MM

Random:
1 face



SR BL 1071 FL
Finish: **Antiskid Matt**

**300 x
300mm**





Matt
SERIES

300 x
600MM

Matt

SERIES



SR BL 1075 LT
SR BL 1075 HL

RANDOM

SR BL 1075

Finish:
Matt

Size:
300 x 600MM


Random:
1 face



SR BL 1075 FL
Finish: **Antiskid Matt**

**300 x
300mm**




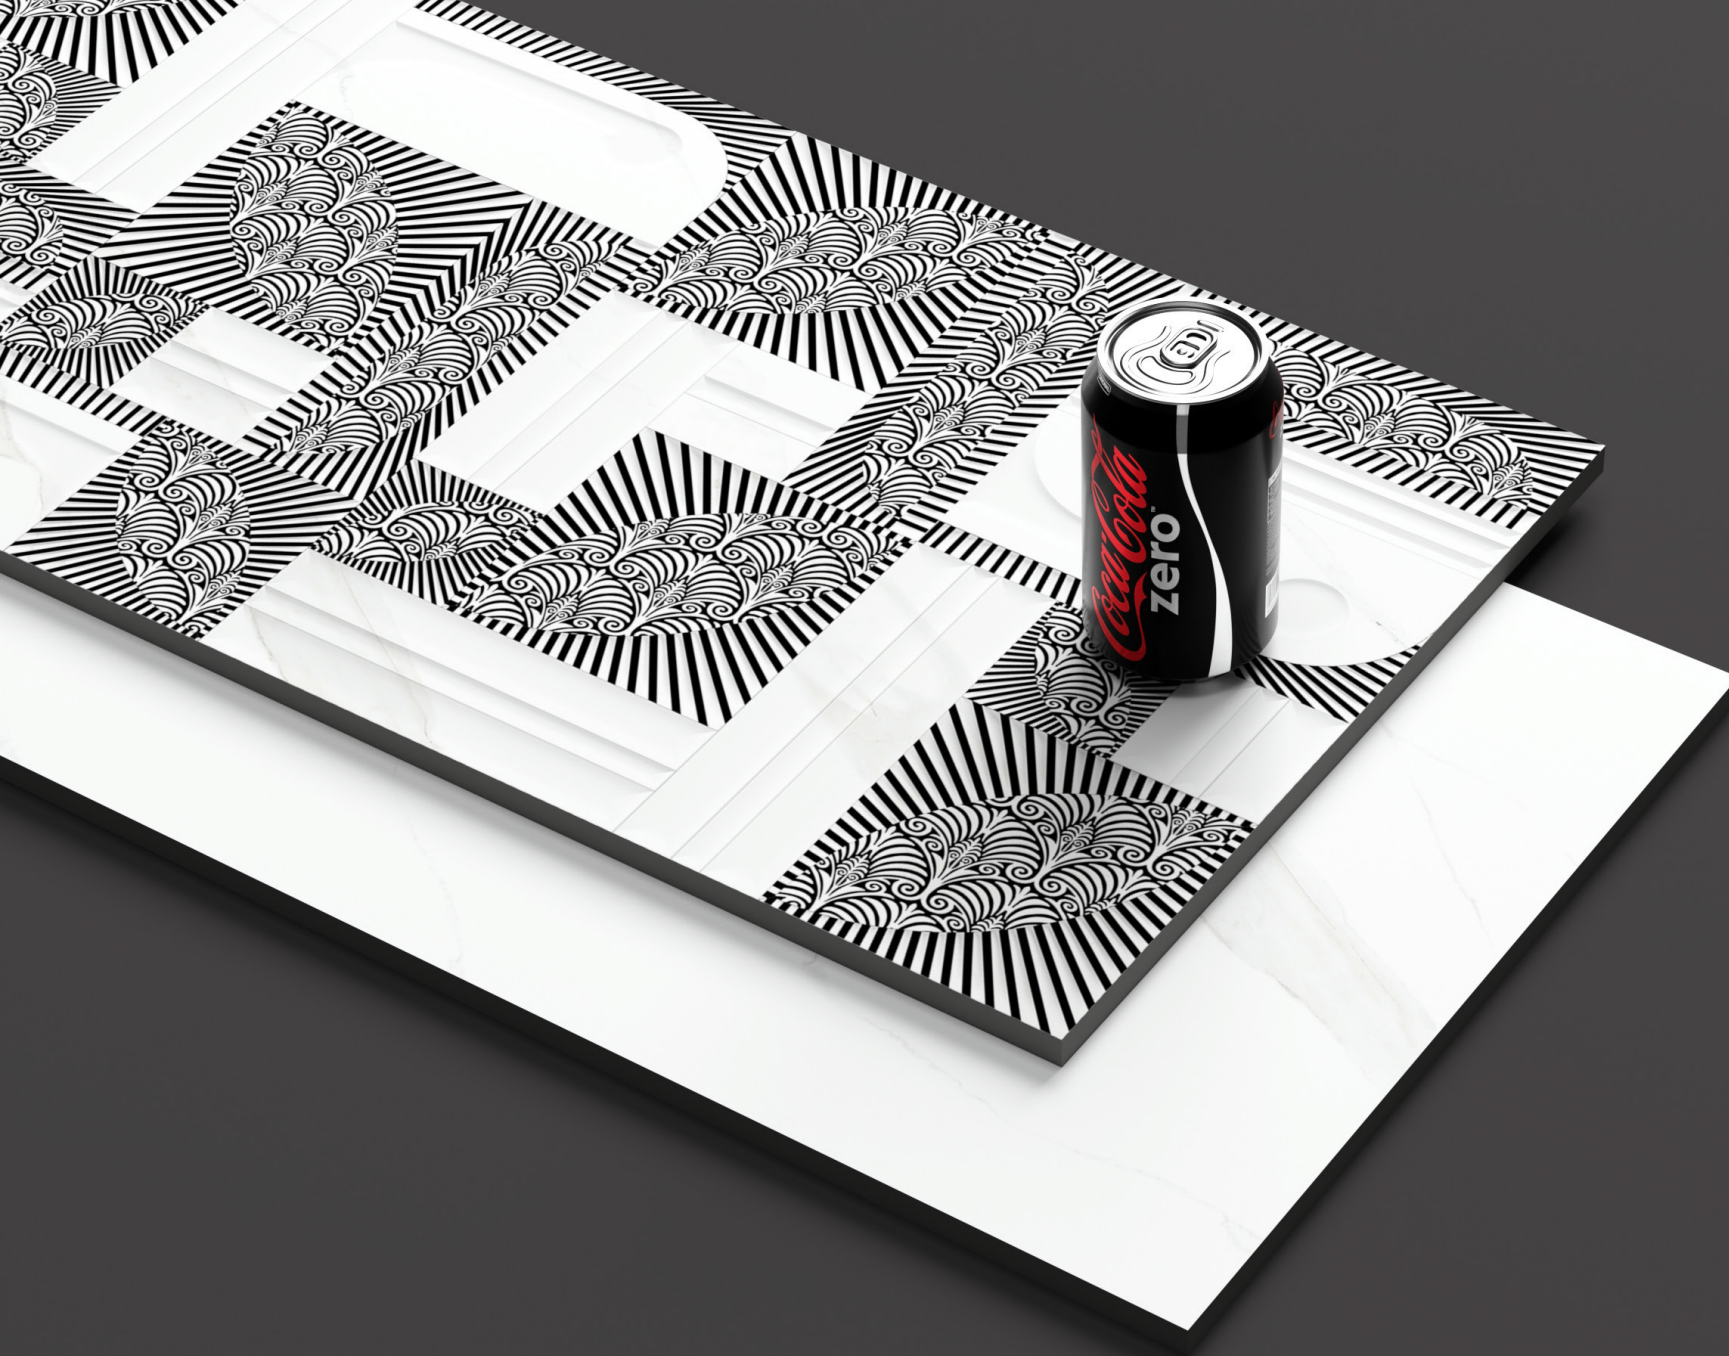

Matt
SERIES

300 x
600MM

Matt
SERIES

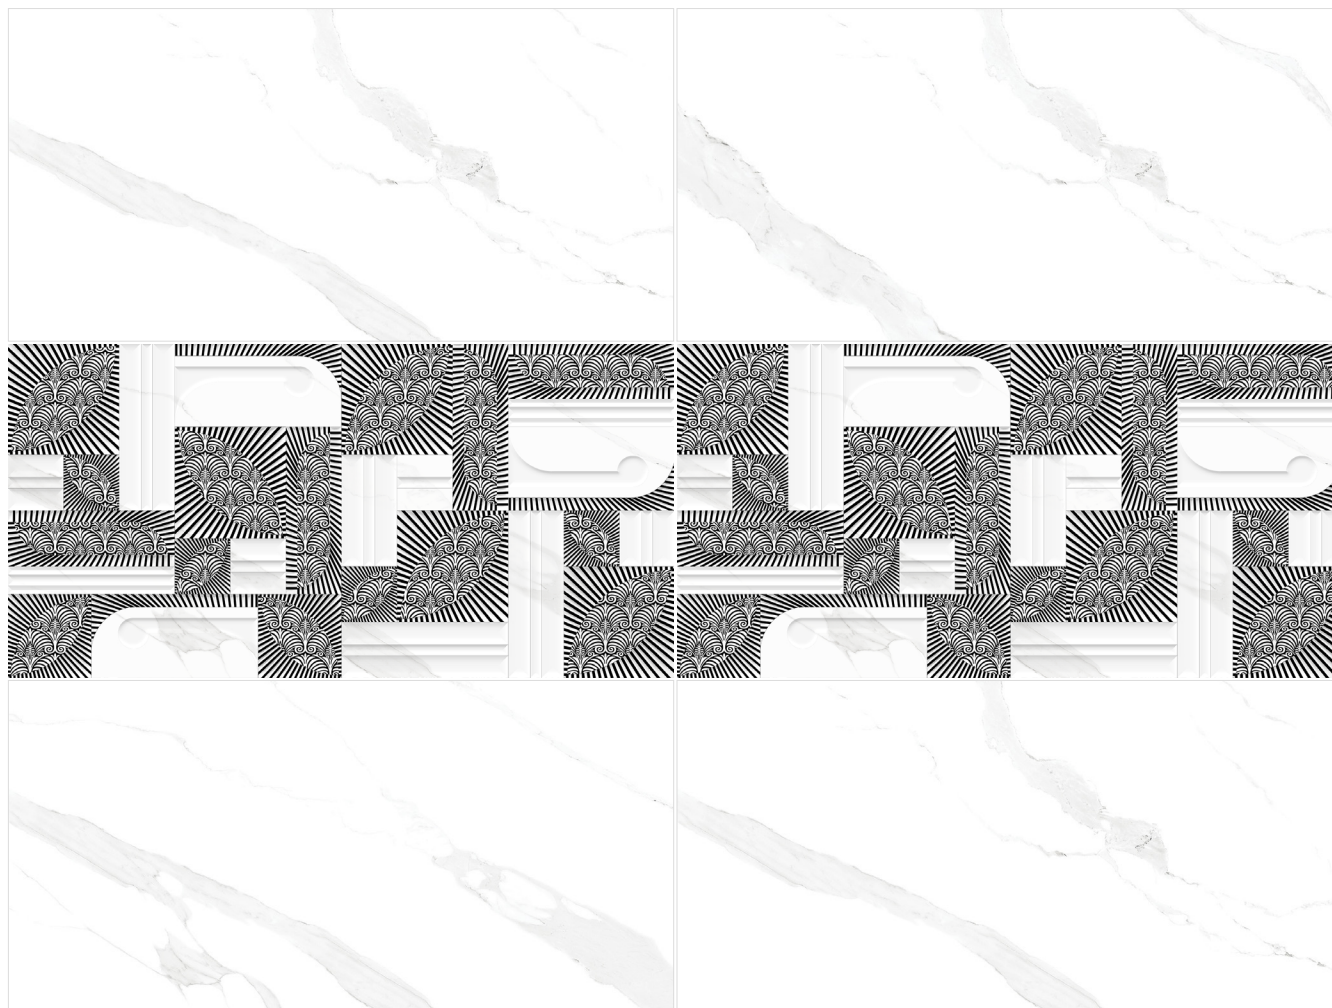

SR BL 1076 LT
SR BL 1076 HL

RANDOM

SR BL 1076

Finish:
Matt

Size:
300 x 600MM


Random:
1 face



SR BL 1076 FL
Finish: **Antiskid Matt**

**300 x
300mm**



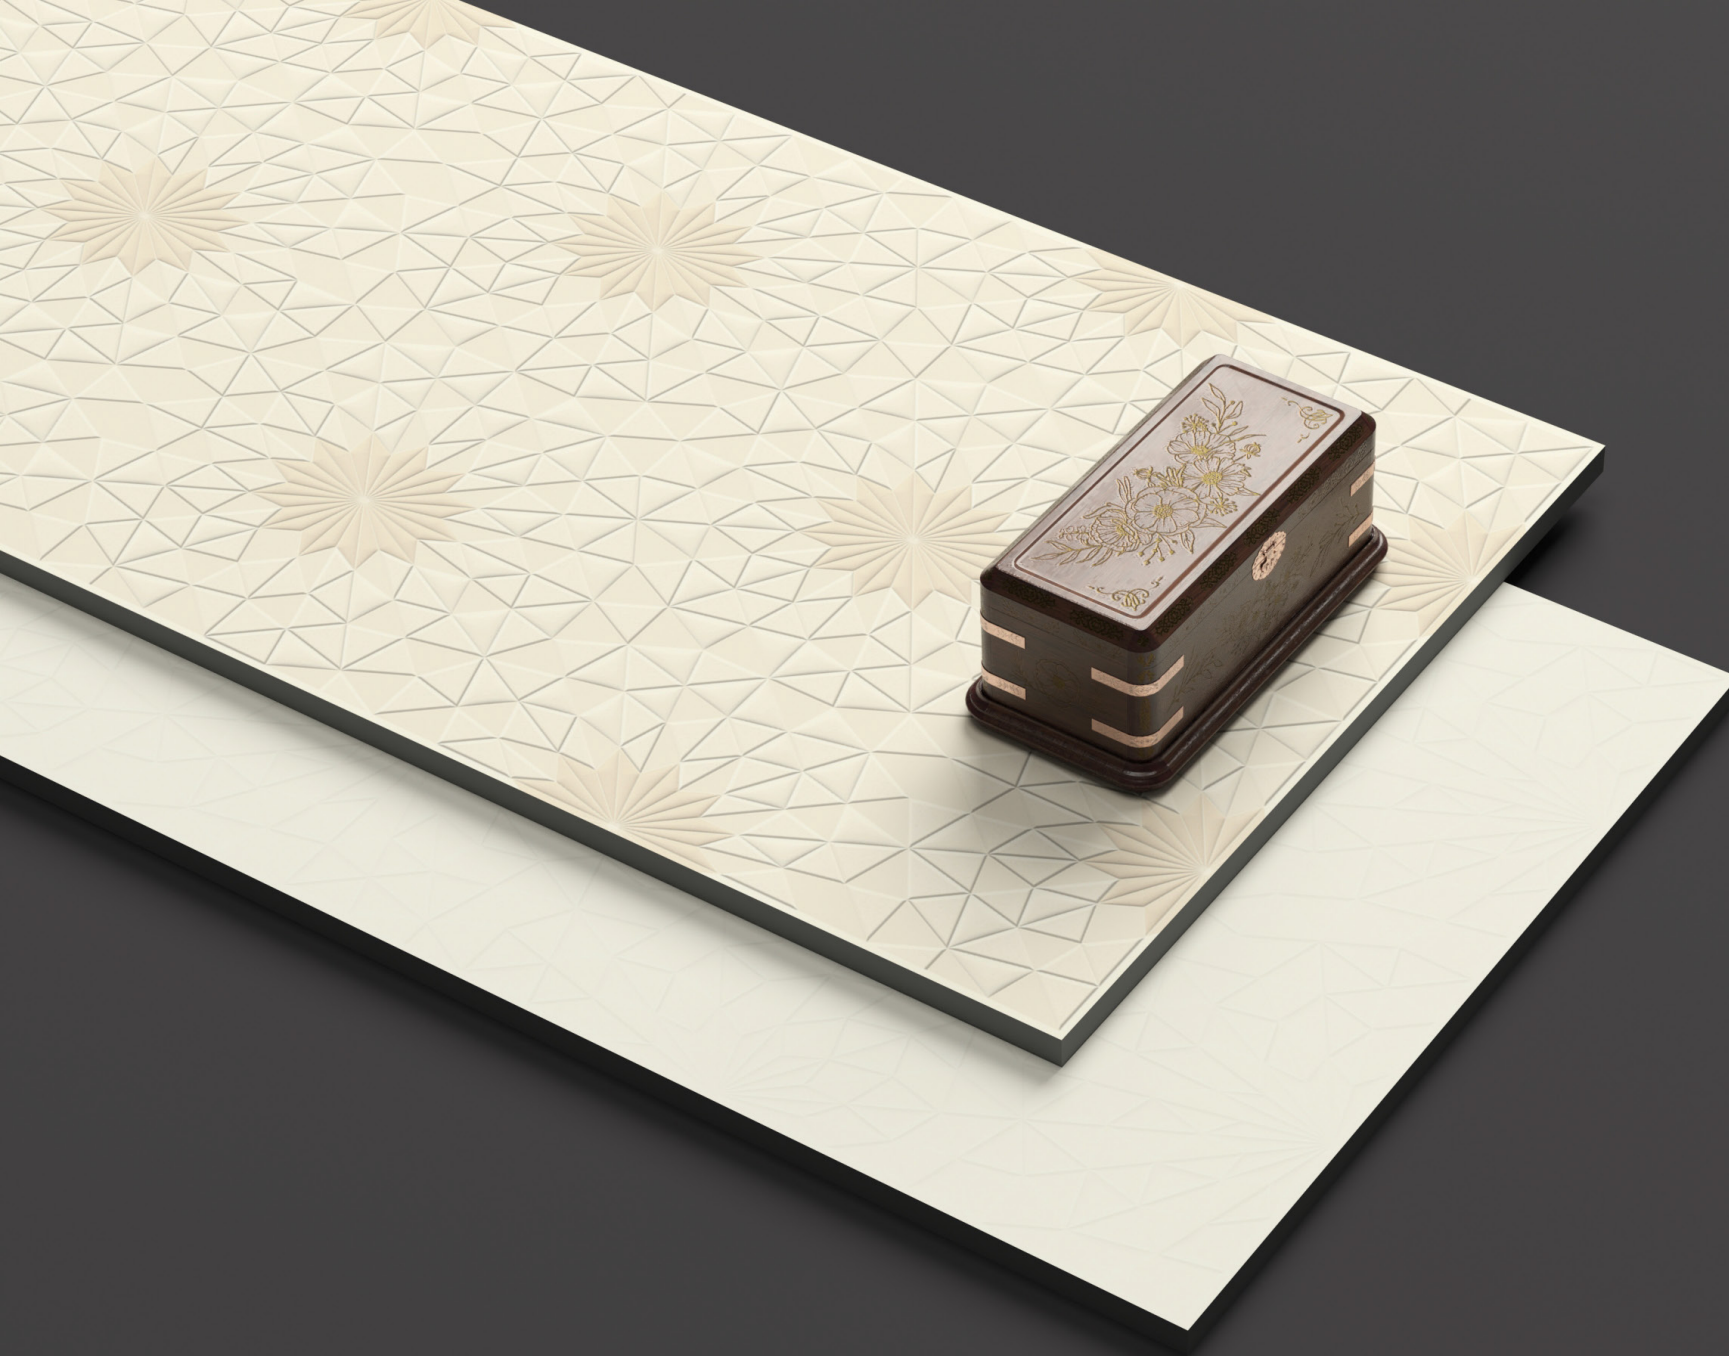

Matt
SERIES

300 x
600MM

Matt
SERIES



SR BL 1077 LT
SR BL 1077 HL


RANDOM

SR BL 1077

Finish:
Matt

Size:
300 x 600MM

Random:
1 face



SR BL 1077 FL
Finish: **Antiskid Matt**

**300 x
300mm**





Matt
SERIES

300 x
600MM

Matt
SERIES



SR BL 1086 LT
SR BL 1086 HL


RANDOM

SR BL 1086

Finish:
Matt

Size:
300 x 600MM


Random:
1 face



SR BL 1086 FL
Finish: **Antiskid Matt**

**300 x
300mm**




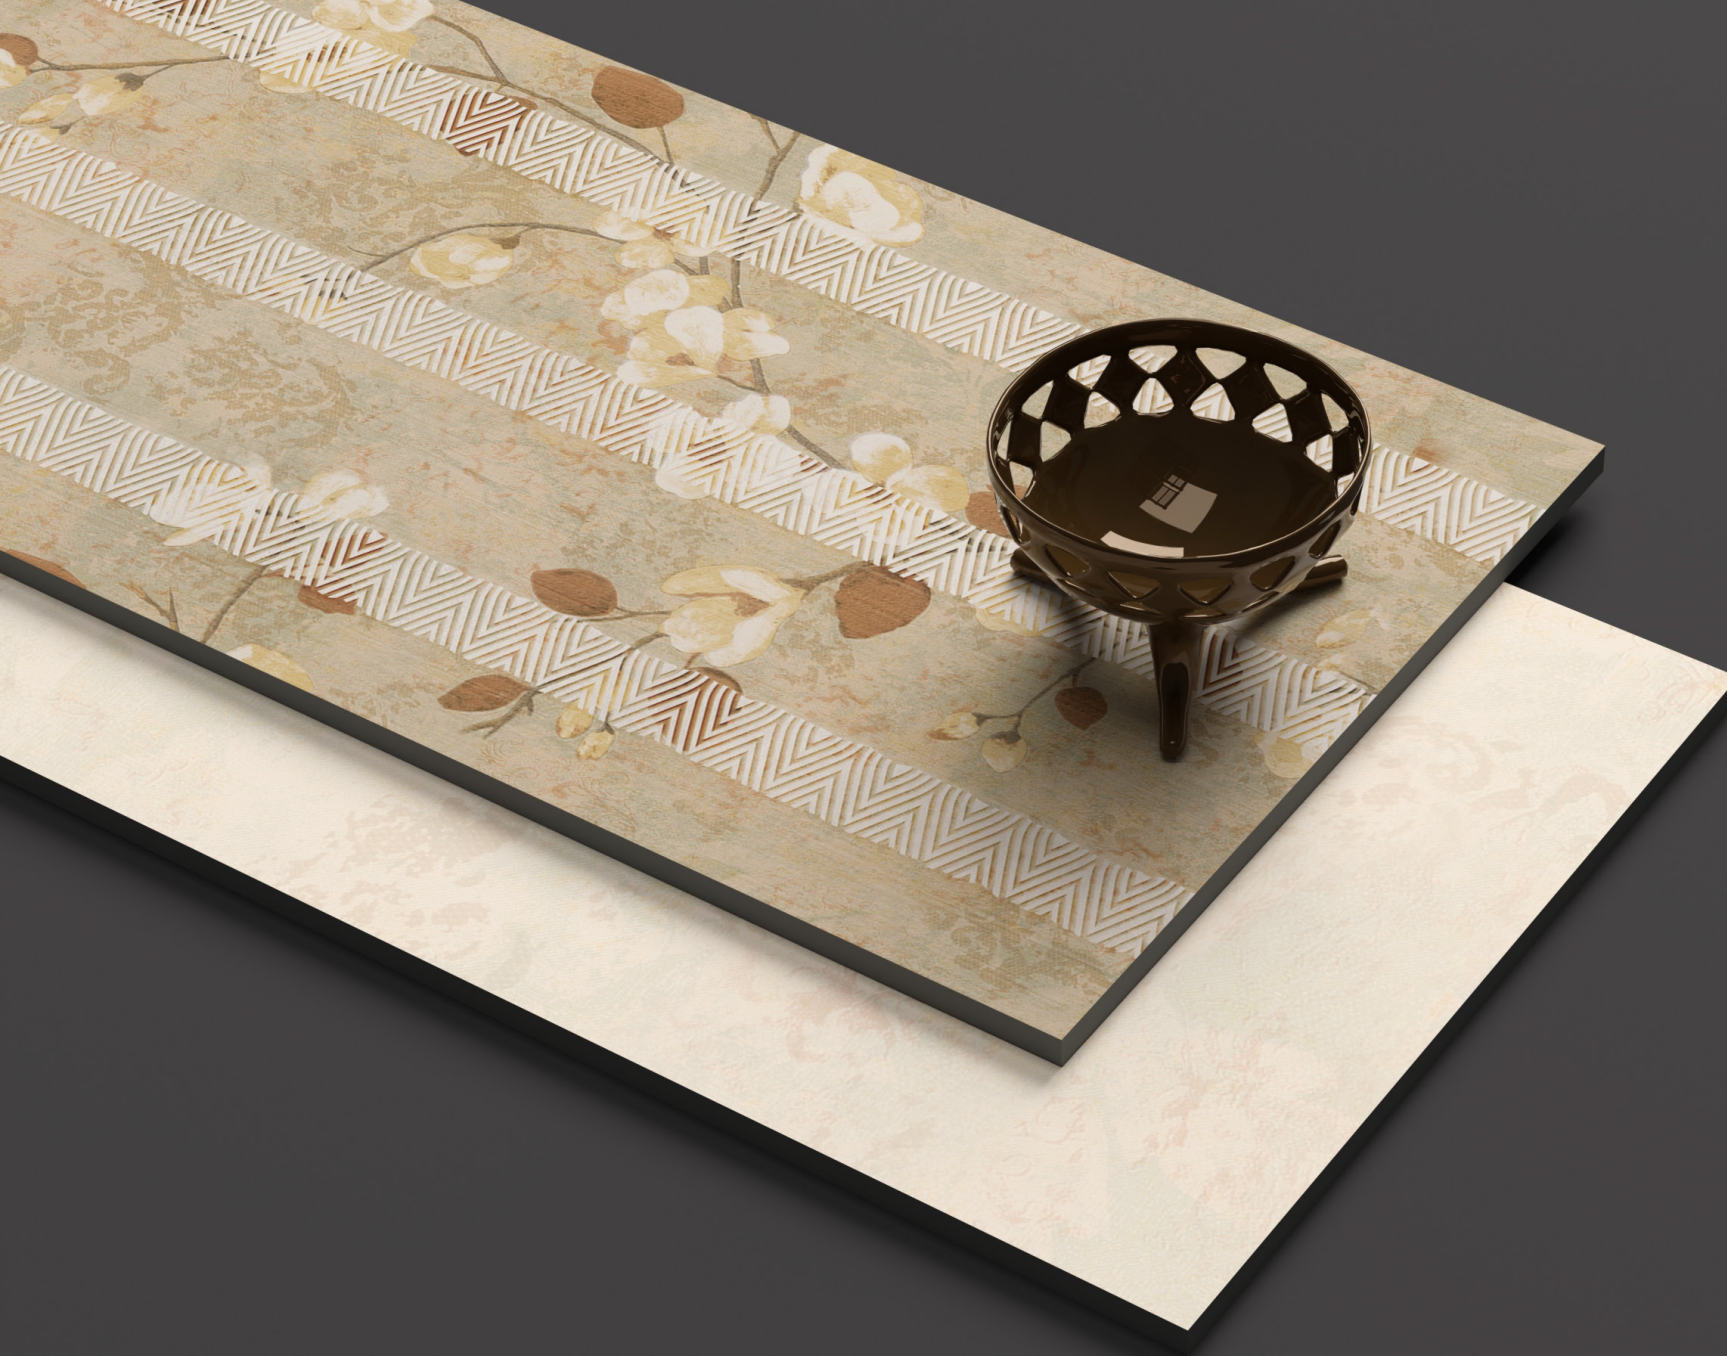

Matt
SERIES

300 x
600MM

Matt
SERIES

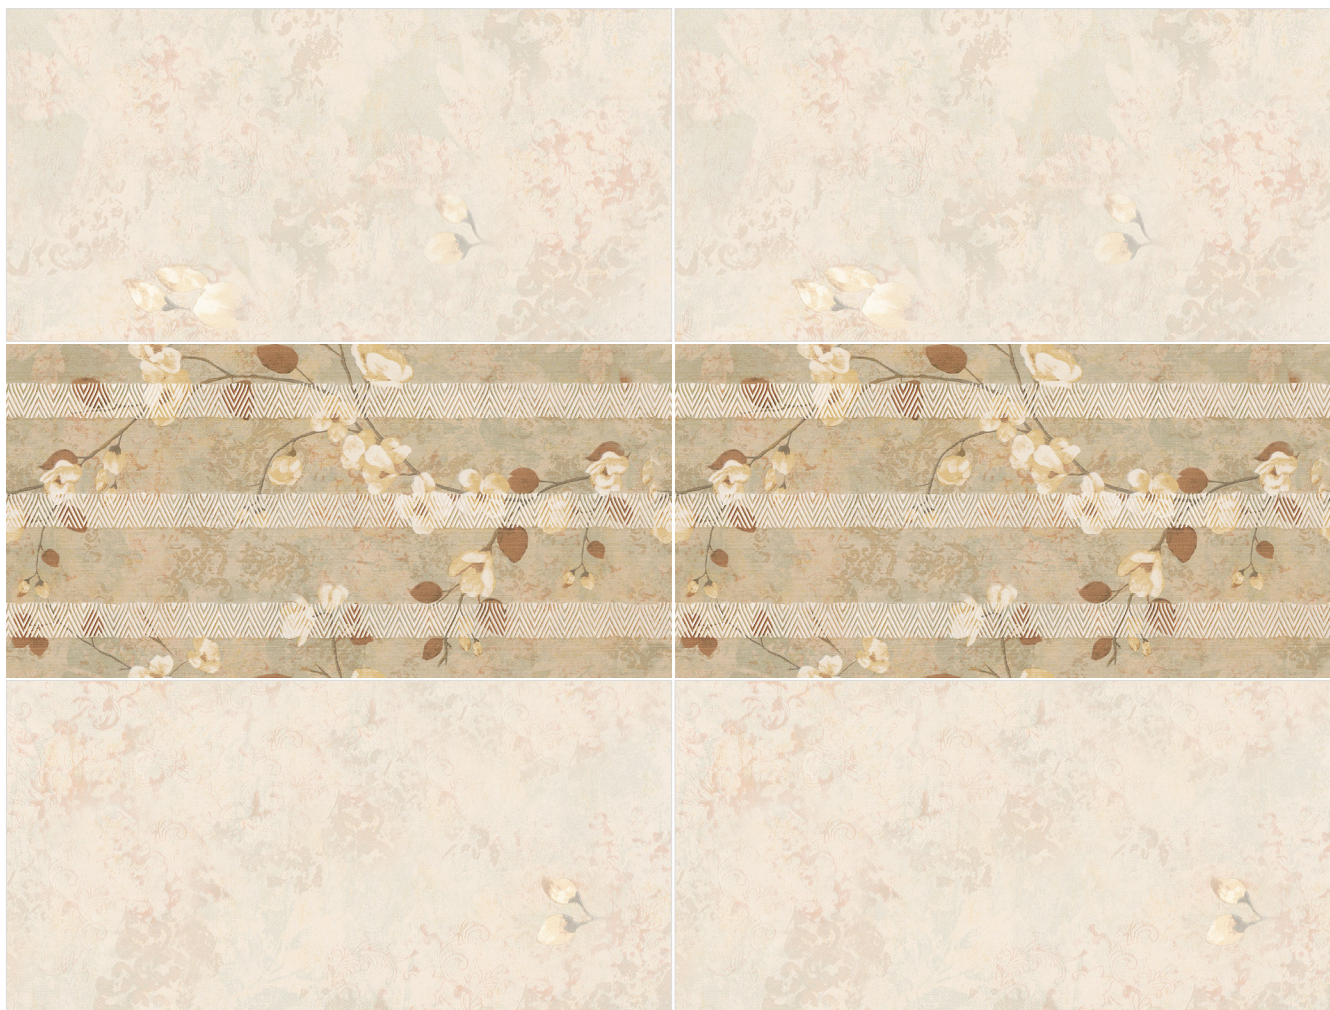

SR BZ 3026 LT
SR BZ 3026 HL

RANDOM

SR BZ 3026

Finish:
Matt

Size:
300 x 600MM

Random:
2 face



SR BZ 3026 FL
Finish: **Antiskid Matt**

**300 x
300mm**



Technical Specifications


Sr. No.	CHARACTERISTIC	EURO Standard EN-159/IS13759	BLACKBERRY Value
Dimension & Surface Quality			
1	Dimension & Surface Quality	0.5 %	0.4 %
2	Deviation in thickness	0.6 %	0.3 mm
3	Straightness of sides	0.3 %	0.2 %
4	Rectangularity	0.5 %	0.3 %
5	Surface flatness	0.5 %	0.3 %
6	Surface Quality	Min. 95 %	Min. 96 %
Physical Properties			
1	Water Absorption	>0.10%	12-15%
2	Bending Strength	>150 kg./Cm ²	>150-180 kg./Cm ²
3	Scratch Hardness (mohs scale)	Min. 3	Min. 3
4	Crazing Resistance	1 Cycle	No Crazing upto 4 Cycle
Chemical Properties			
1	Staining Resistance	Min. Class 2	Resistant to all Acids and Alkalies & Household Chemical, except Hydro Flouric Acid
2	Impact Resistance	Min. Class B	
Thermo Hydrometric Properties			
1	Thermal Shock Resistance	Resistant 10 Cycle	Conforms
2	Thermal Expansion	Max. 9E-06	Conforms

PACKING DETAILS

NOMINAL SIZE	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA / BOX	WEIGHT PER BOX
300 x 600 mm	09 mm	5 Pcs.	0.90 Sq. Mtr.	14kg.
300 x 300 mm	09 mm	10 Pcs.	0.90 Sq. Mtr.	14kg.

NOTES: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the frming instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTE: Any Complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.



BLACKBERRY
TILES^{P.L.}

CERAMIC for LUXURY




Tiles Fixing Instructions

1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
 - A: Use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
 - B: Apply 20-25MM of bedding materials over the floor area of 1.0 SQM at a time.
 - C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after Laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.



Step-1
Surface Preparation

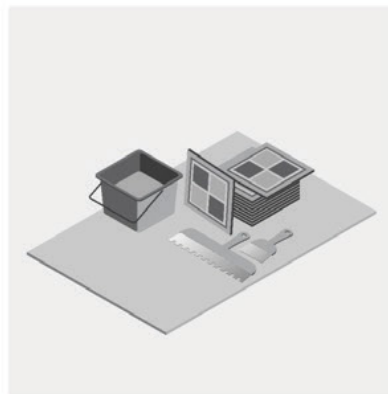

Step-2
Preparation of Subgrade



Step-3
Laying of tiles on the Surface



Step-4
Post Tiling Work



Cleaning after Laying

We suggest a good initial cleaning after the laying on the floor or wall, this is very important for removing residual grouting and the normal dirt coming from the building works.

We suggest the use of a cementitious descaler, that is a lightly acid product that doesn't emit fumes that are harmful for the user and that can attack joints. In case of material layed with epoxy or resinous grouting, we recommend to clean after laying with specific detergent.



Regular Maintenance

For a good cleaning of the floor we suggest the use of a natural detergent with a high cleaning power. In case of strong dirty and encrusted by the time, we recommend to consult the following scheme to find the perfect solution to every situation

Recommendations

Drying Process

Once the tiles have been grouted and any excess grout cleaned off, it is important to wait the stipulated time before using the tiled surface; in other words, any cleaning should wait until the tiled surface is completely dry. We recommend waiting 5 days before cleaning in readiness for full use.

Damage Prevention

Measures should also be taken to protect the newly tiled surface against mechanical or chemical damage resulting from subsequent work by other professionals or later installations. Damage can be prevented by covering the floor tiles with thick cardboard or similar material.

Protection from Liquid

The newly tiled surface must be protected from water and damp while the adhesive and grouting materials are maturing and hardening. This is particularly important in outside spaces and areas where there is a risk of freezing.

Cleaning Products

For the final cleaning of the tiled surface, the products used should be compatible with the chemical resistance of the tiles. Avoid solid detergents with abrasive particles and solutions containing hydrofluoric acid, which attacks the glaze and causes irreversible damage to the ceramic tile.

TYPE OF DIRT

Cement, Kalkstein, metal tracer, rust
Residuals, stains and halos of epoxi joints
Grease, tire marks, colours, marker, etc.
Grafitis

PRODUCT

Cementitious descaler
Epoxi descaler
Non soap degrease
Acetone and antigraffiti star

Size-able Showcase




The intricacies of size and design affect the whole outlook and we understand your concern about the size specifications quite well. Also, the design that's uniform and long-lasting has a greater impact on your investment. Choose Blackberry Tiles and you need not worry about anything. Just let us know what you need

1200 X 1800mm	GVT
800 X 1600mm	GVT
600 X 1200mm	GVT
600 X 600mm	GVT
300 X 600mm	CERAMIC WALL TILES
300 X 450mm	CERAMIC WALL TILES
300 X 300mm	CERAMIC WALL TILES / FLOOR TILES



*upcoming



CERAMIC  LUXURY

BLACKBERRY TILES PVT. LTD.

Admin Office

Jetpar Pipli Road, Sapar, Morbi-363642. Gujarat - INDIA

Customer Care No.: +91 90999 86724



Click for visit:
www.blackberrytiles.com

Super Made
in India 