

ENDLESS GLOSSY | MATT




BLACKBERRY
TILES^{P.L.}

CERAMIC for LUXURY




800 x
1600MM



www.blackberrytiles.com

Explore the Creative World of Ceramic Art

Blackberry is a uprising manufacturer and exporter of all type of c eramic tiles. We are rooted in India, creating products in-line with contemporary trends of architecture to deliver excellent experiences and lavish all across the world with our vogueish surfaces.

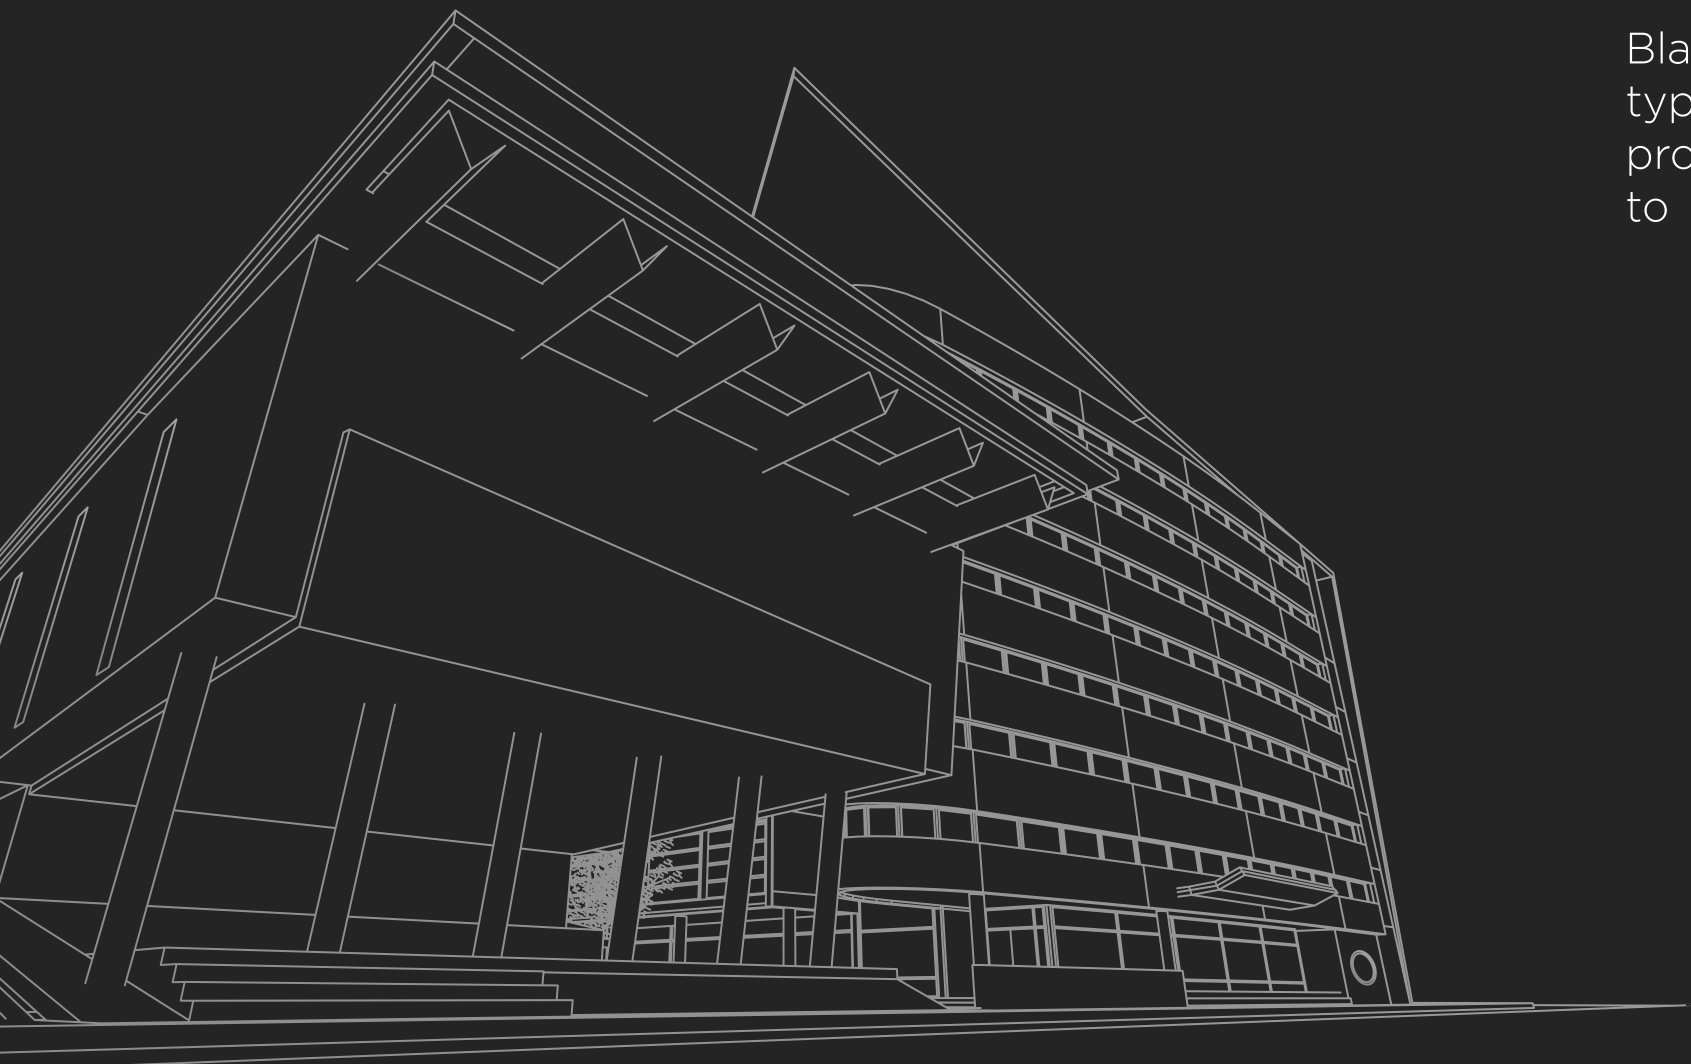

DISPLAY AREA

35K sq.ft

BUILDING AREA

65K sq. mtrs

PRODUCTION CAPACITY

25K box per day

LAND AREA

92K sq. mtrs



EASY TO CLEAN

Matte surface tiles are exempt from frequent cleaning due to the best concealing of smudges and stains.

CHEMICAL RESISTANT

Our chemical-resistant tiles provide great durability against abrasion, anti-skid qualities for worker safety, and an attractive appearance.

SCRATCH RESISTANT

When it comes to the scratch resistance feature, it will win the top spot. A Matte surface prevents scratches.

FROST RESISTANT

Frost-resistant tiles are not damaged by extremely low temperatures. tile has the ability to endure freeze/thaw temperatures without significant harm.

STAIN RESISTANT

The most appealing aspect of matt finish tiles is that they require no maintenance.



800 x
1600MM

www.blackberrytiles.com



▶ ***INFINITE-1001***

▶ Dimension :
800X1600MM

▶ Surface
GLOSSY

▶ Random
04

▶ Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE




HIGH
DURABILITY




WATER
RESISTANCE



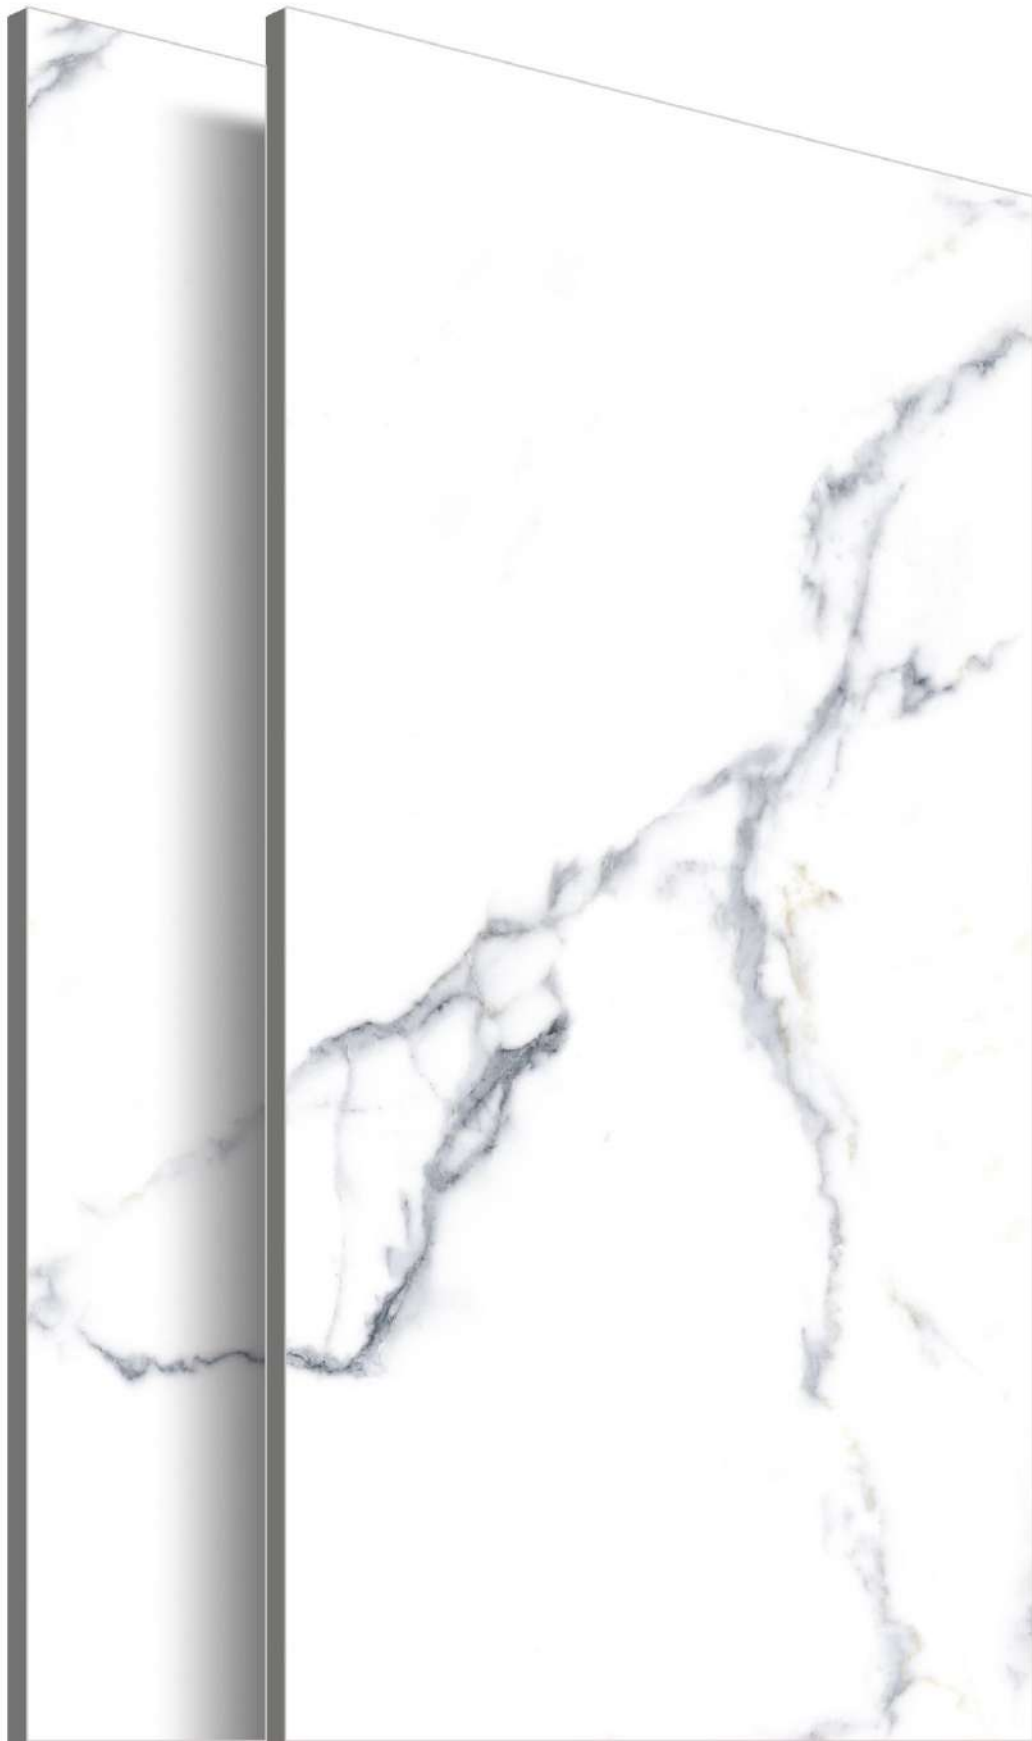

INFINITE-1003

Dimension : 800X1600MM	Surface GLOSSY
Random 04	Thickness 9 MM

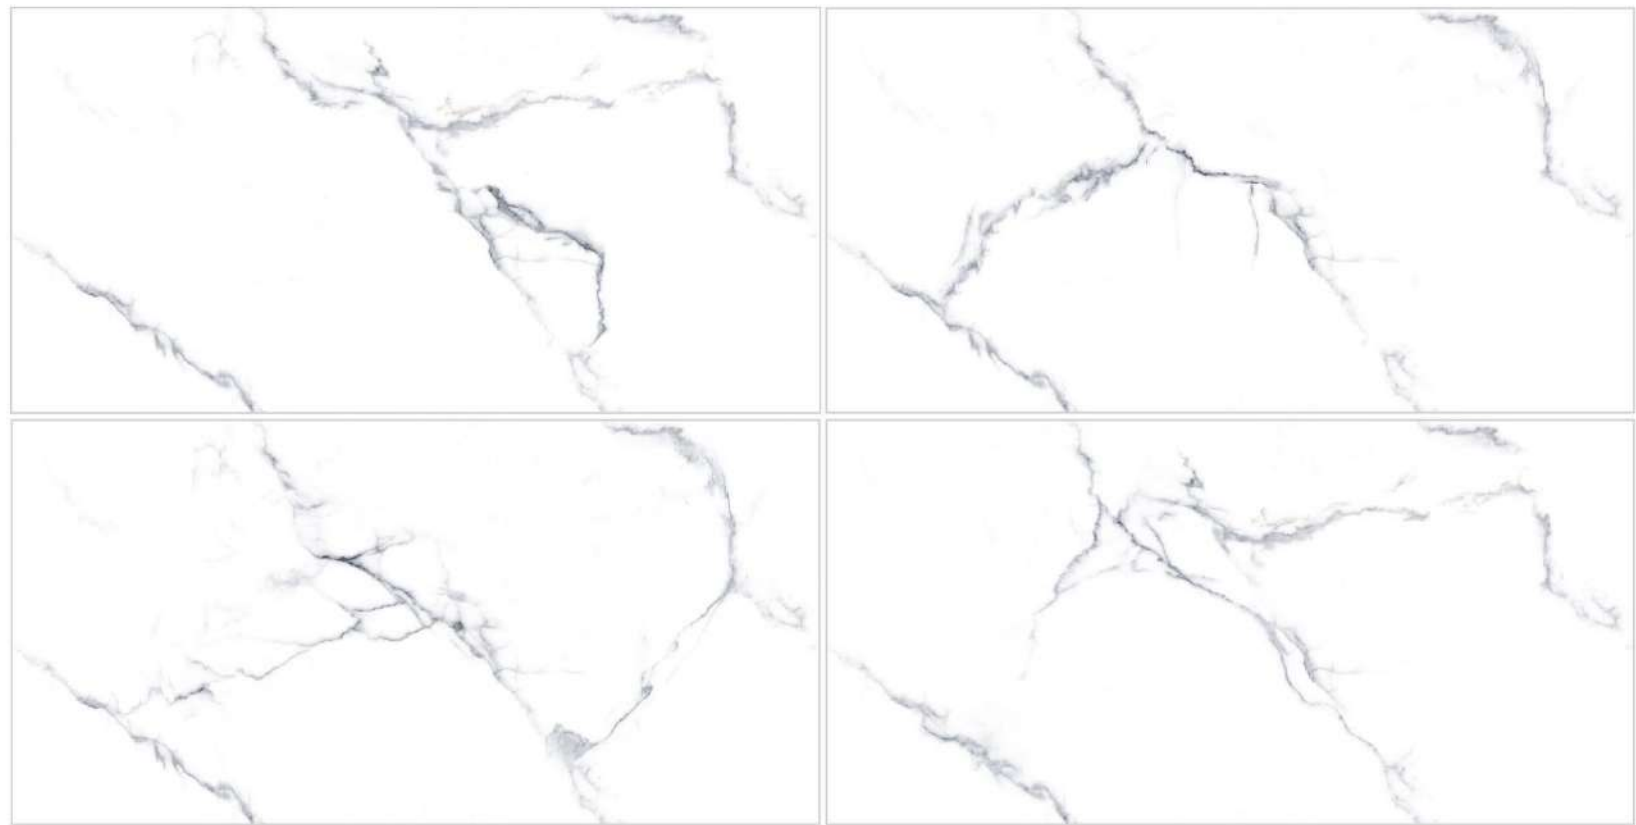





INFINITE-1032

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





INFINITE-1035

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





INFINITE-1046

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





INFINITE-1055

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE




HIGH
DURABILITY



WATER
RESISTANCE



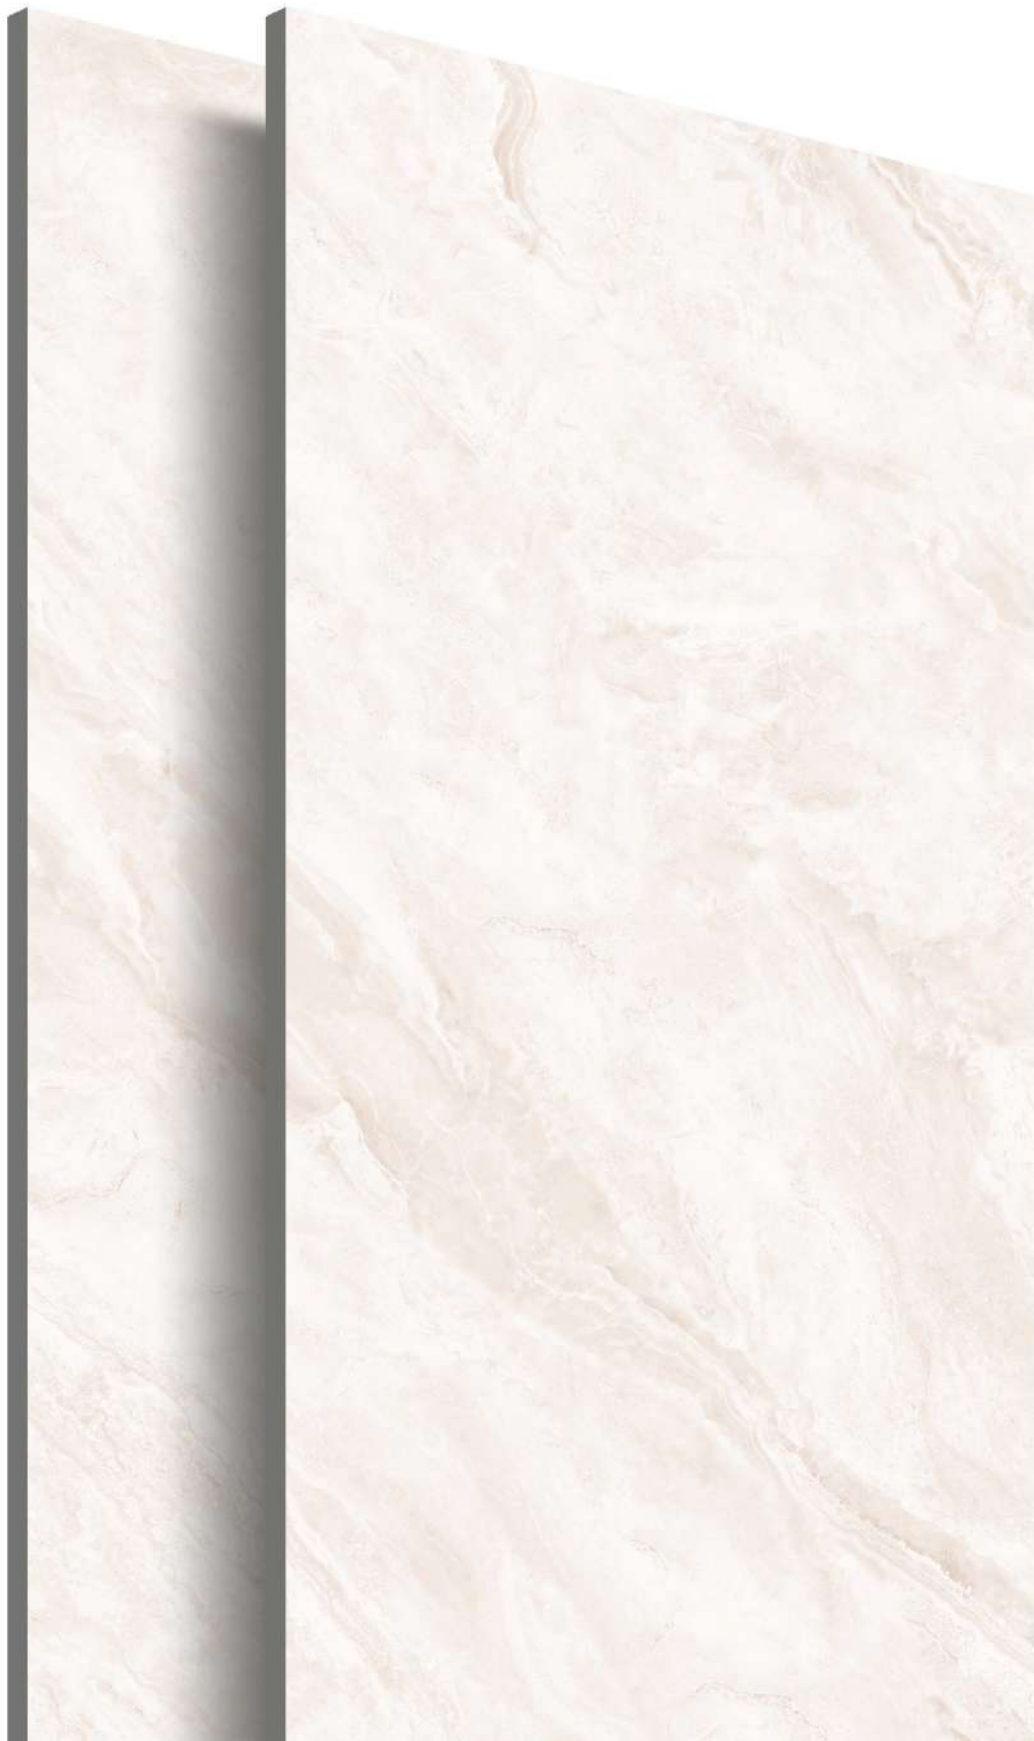

| ***INFINITE-1060***

| Dimension :
800X1600MM

| Surface
GLOSSY

| Random
04

| Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE




HIGH
DURABILITY



WATER
RESISTANCE



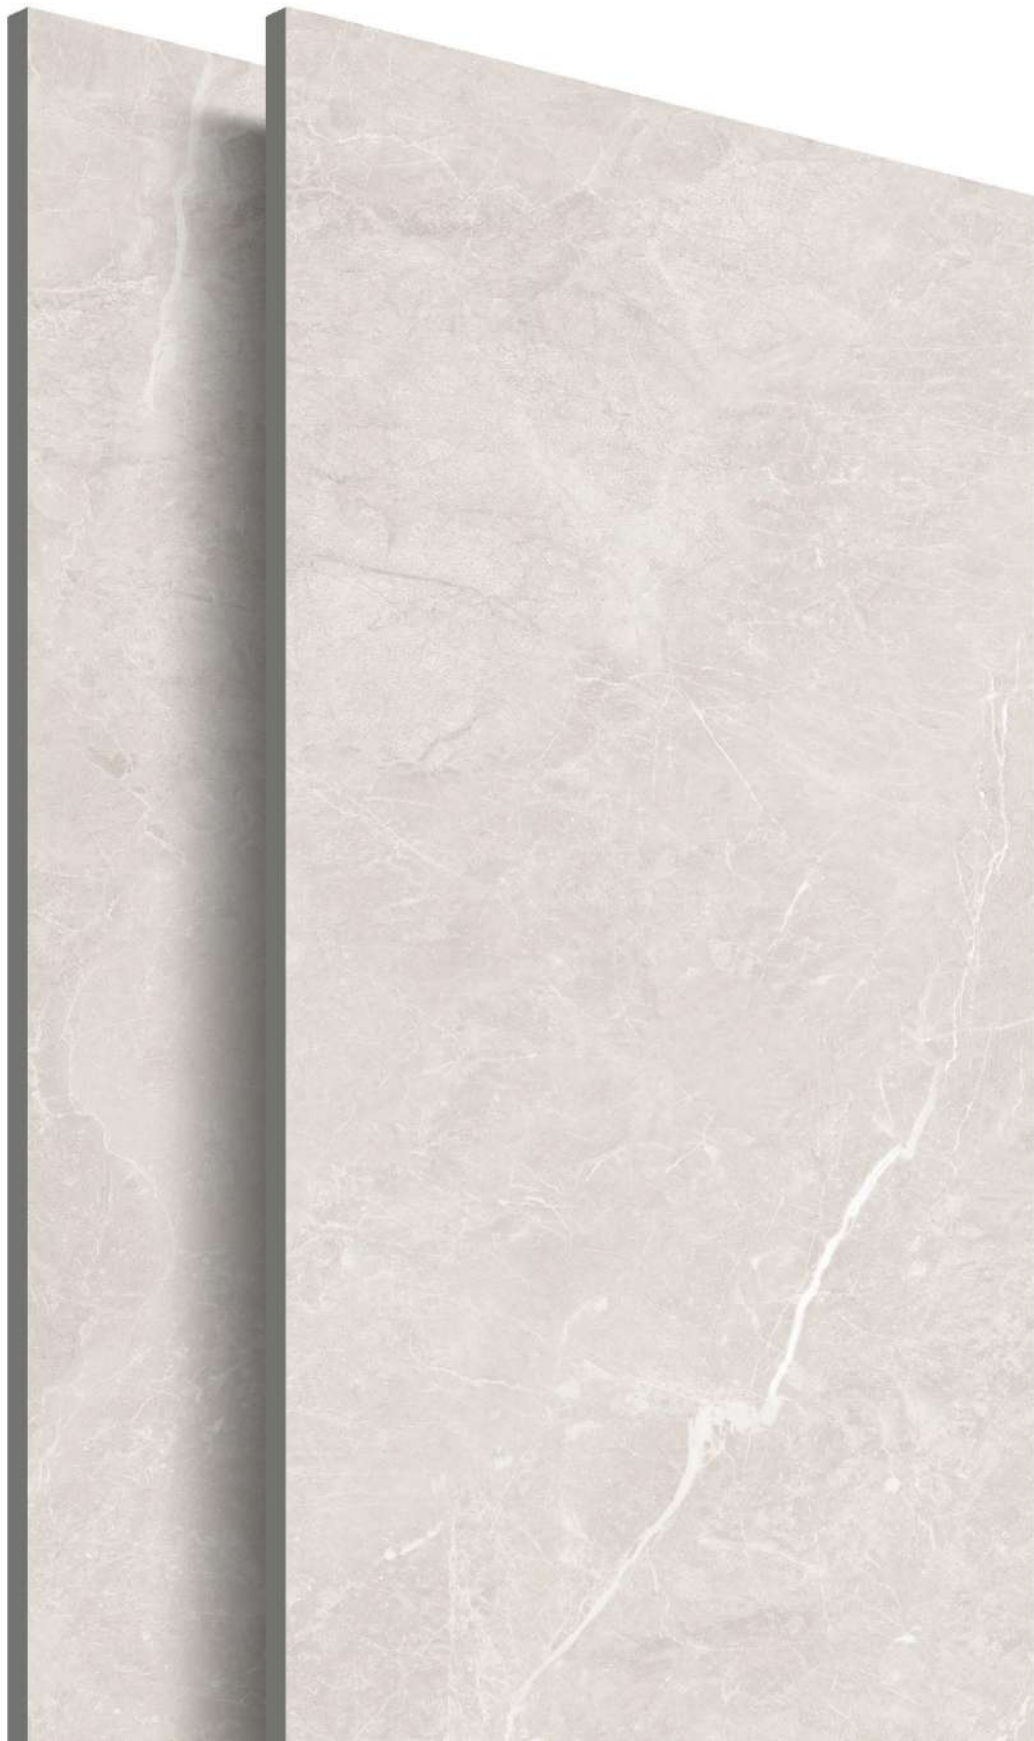

| ***INFINITE-1071***

Dimension : 800X1600MM	Surface GLOSSY
Random 04	Thickness 9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE






INFINITE-1088

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM

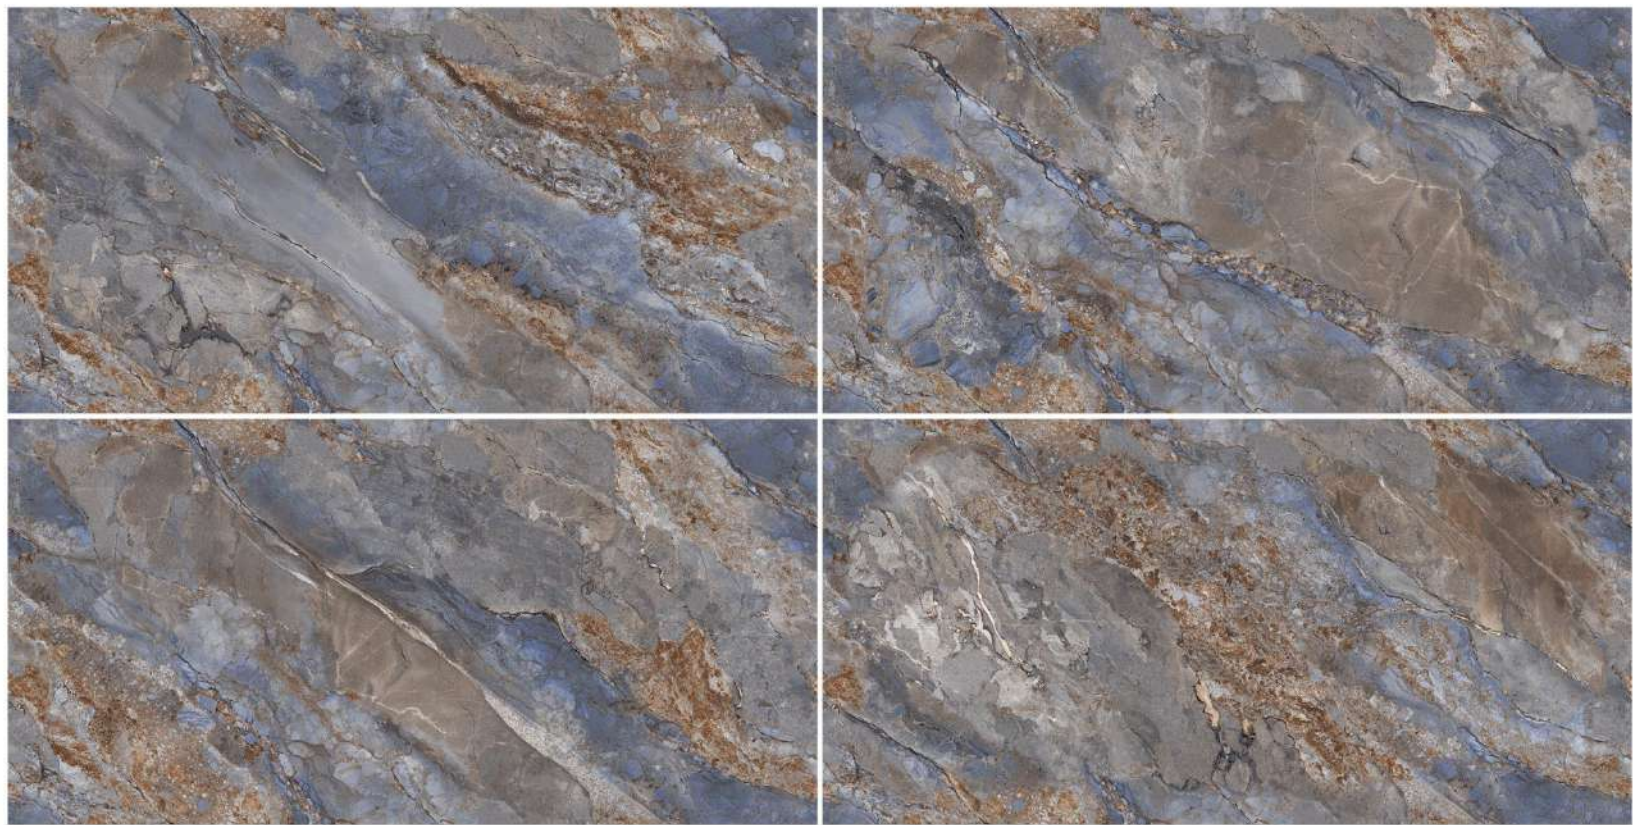

ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE




HIGH
DURABILITY



WATER
RESISTANCE



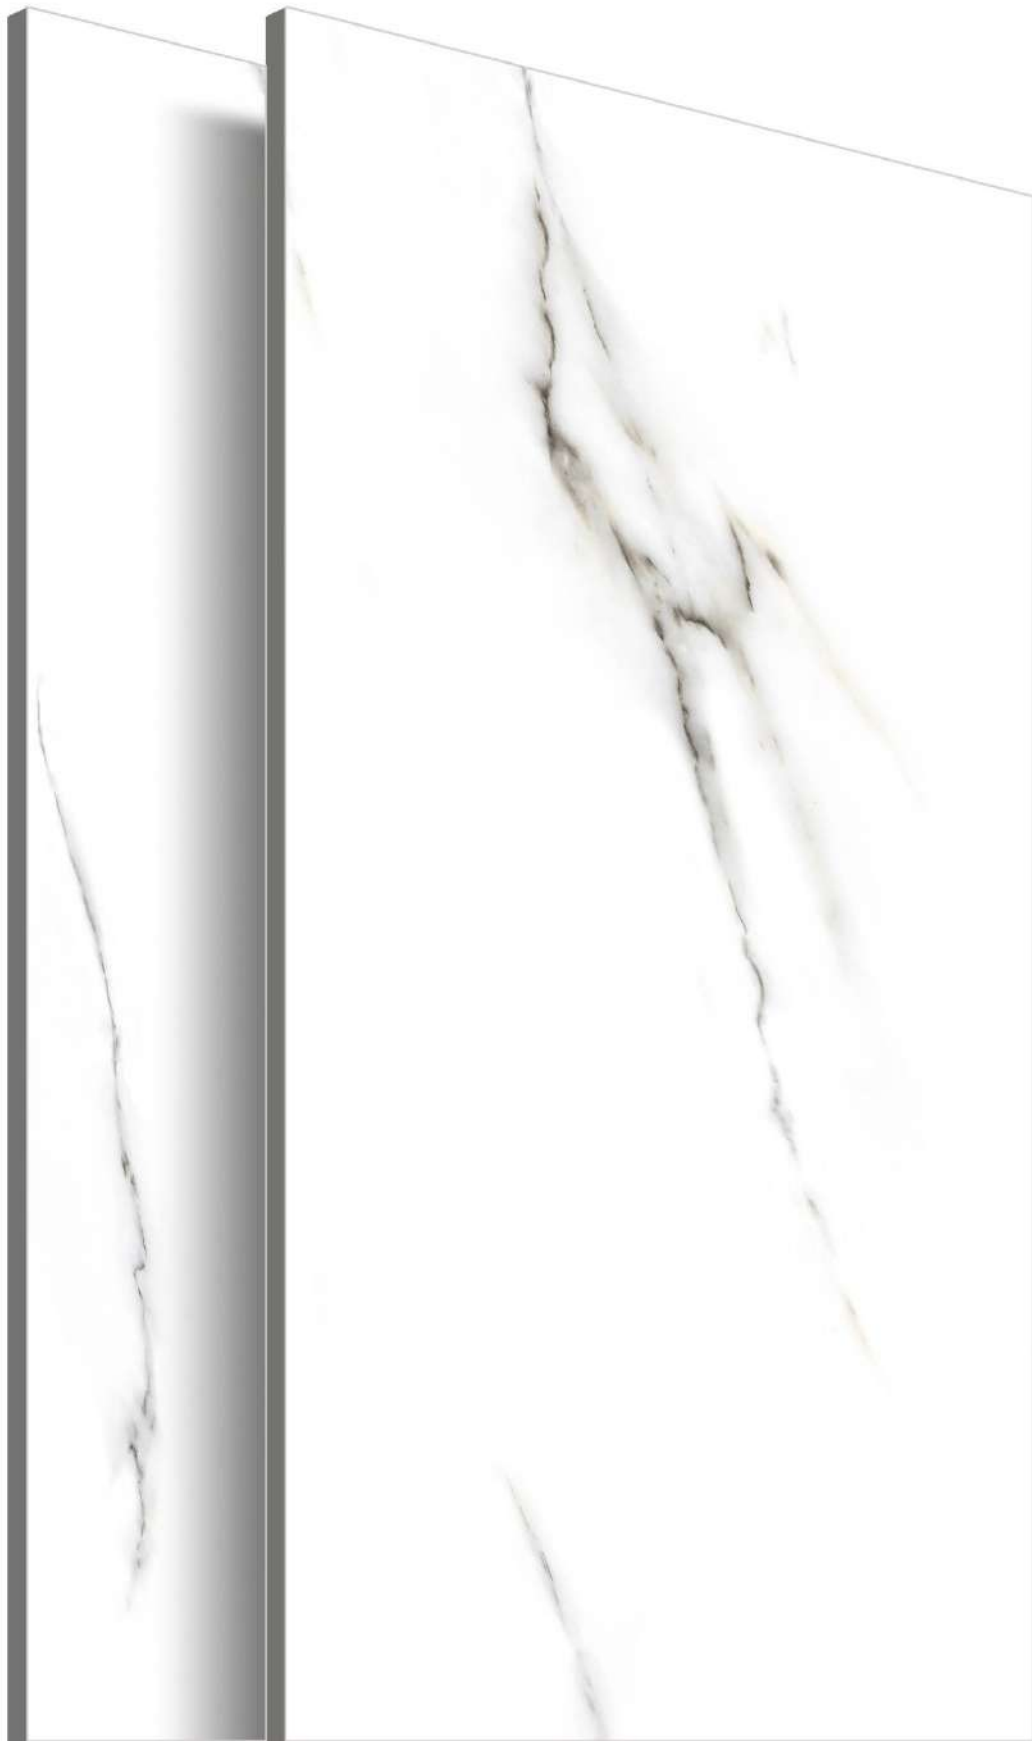

▶ ***INFINITE-1107***

▶ Dimension :
800X1600MM


▶ Surface
GLOSSY

▶ Random
04

▶ Thickness
9 MM





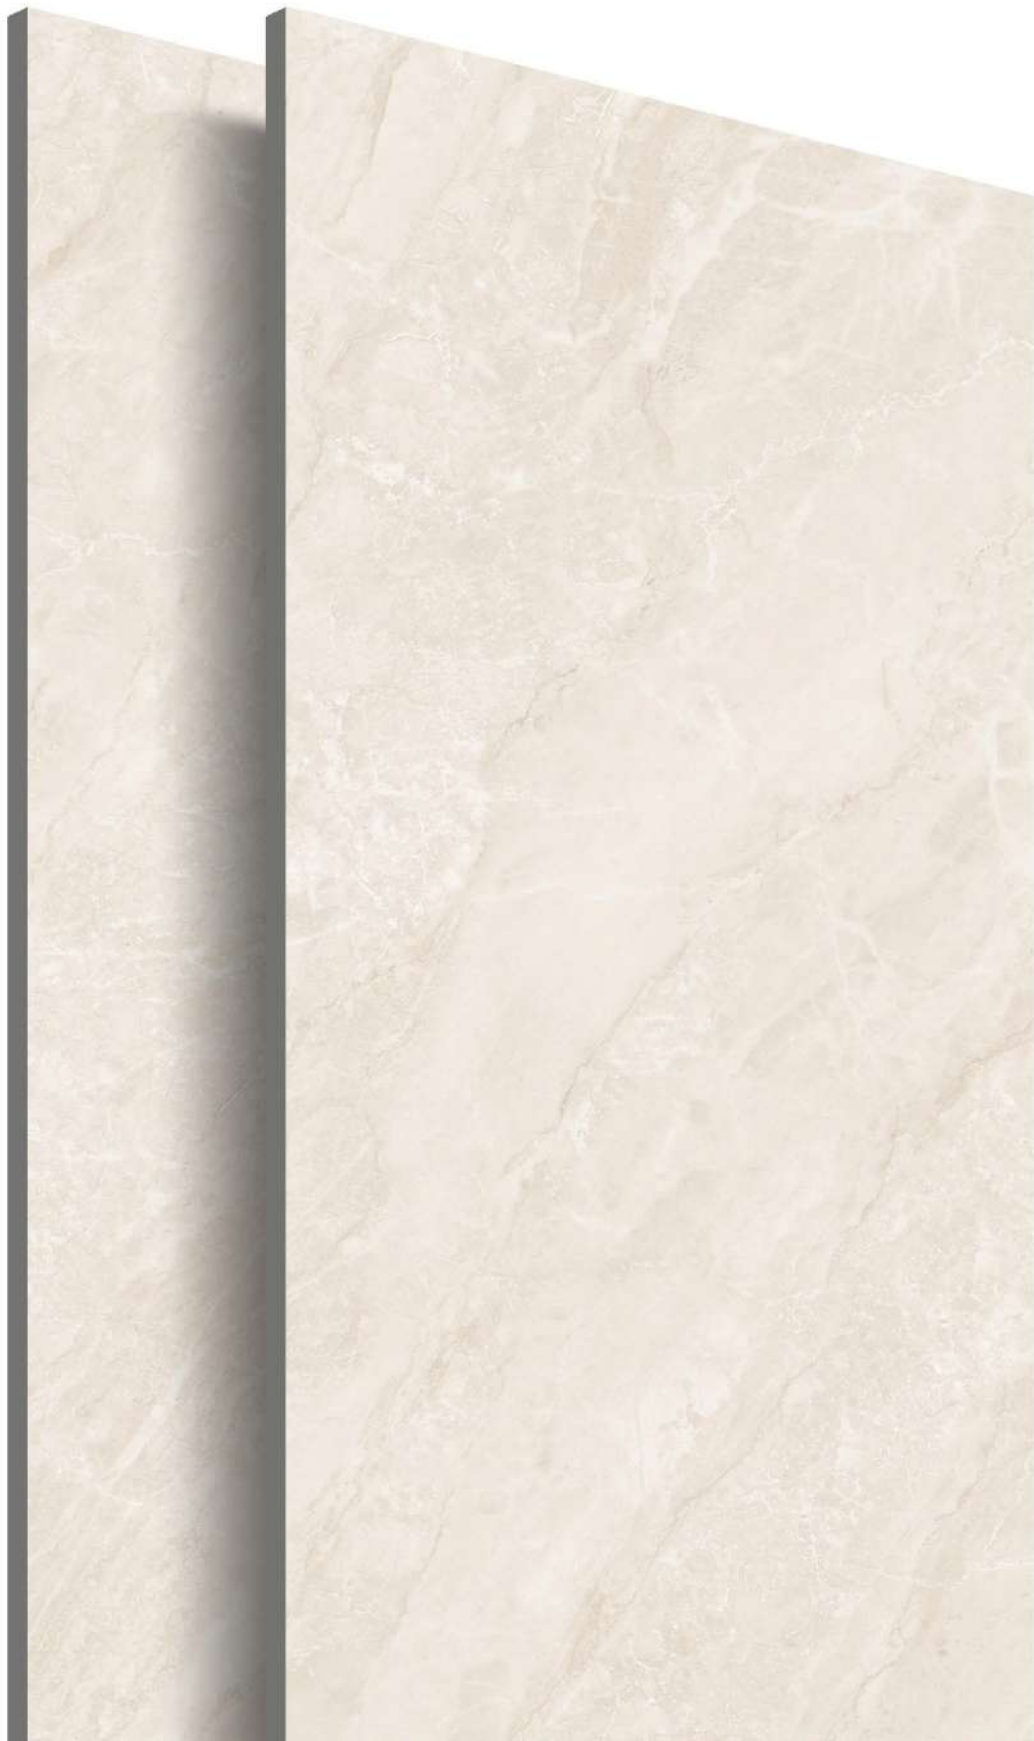


| ***INFINITE-1114***

| Dimension :
800X1600MM

| Surface
GLOSSY

| Random
04

| Thickness
9 MM

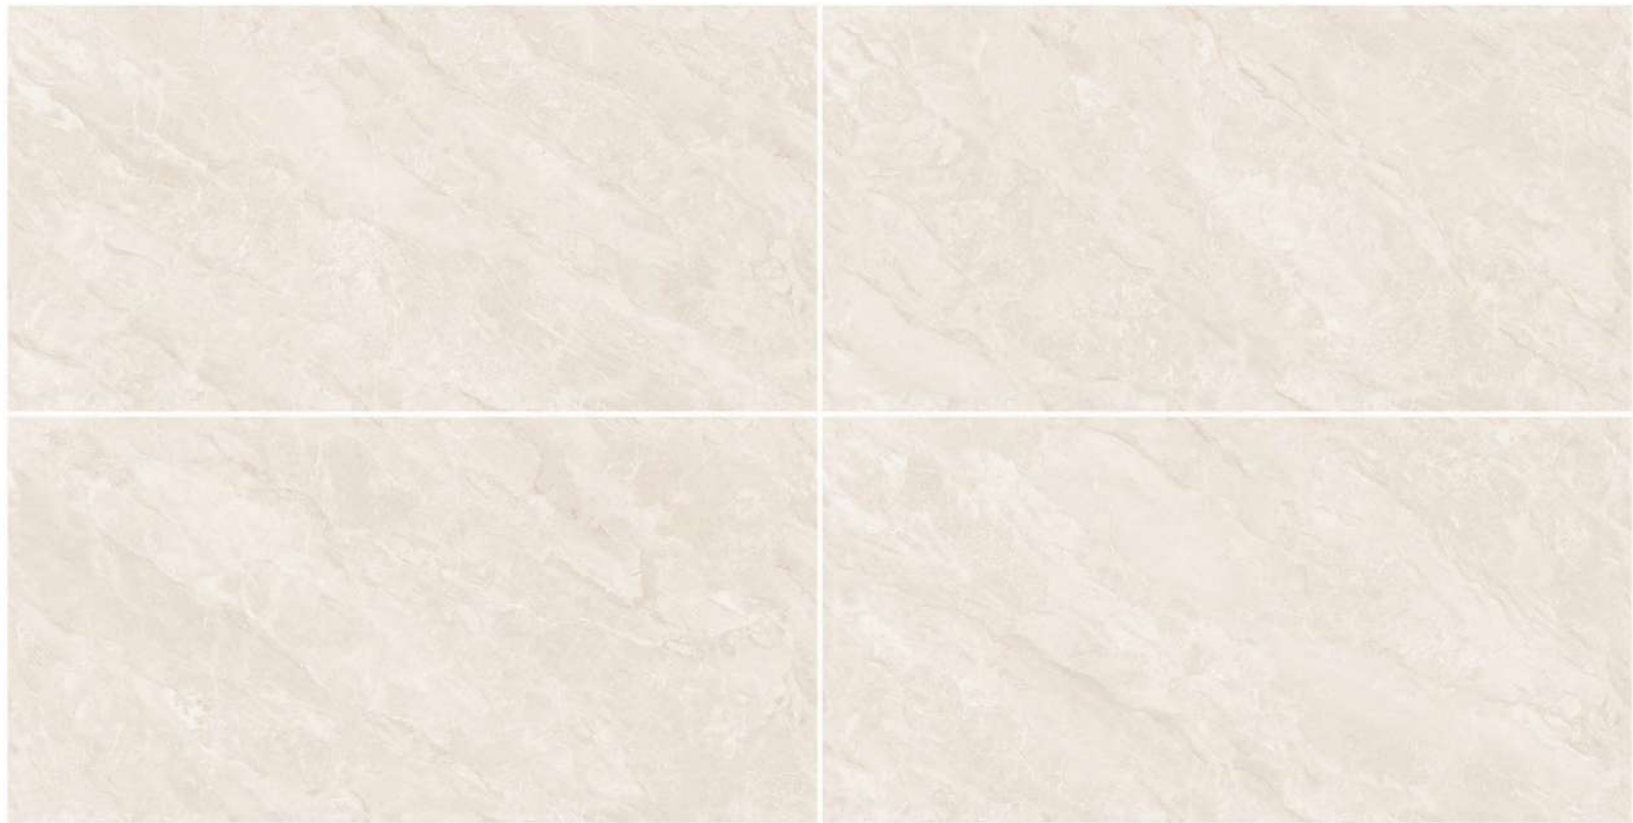

ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE



INFINITE-1115

Dimension :
800X1600MM

Surface
GLOSSY

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE




HIGH
DURABILITY




WATER
RESISTANCE





GLOSSY COLLECTION

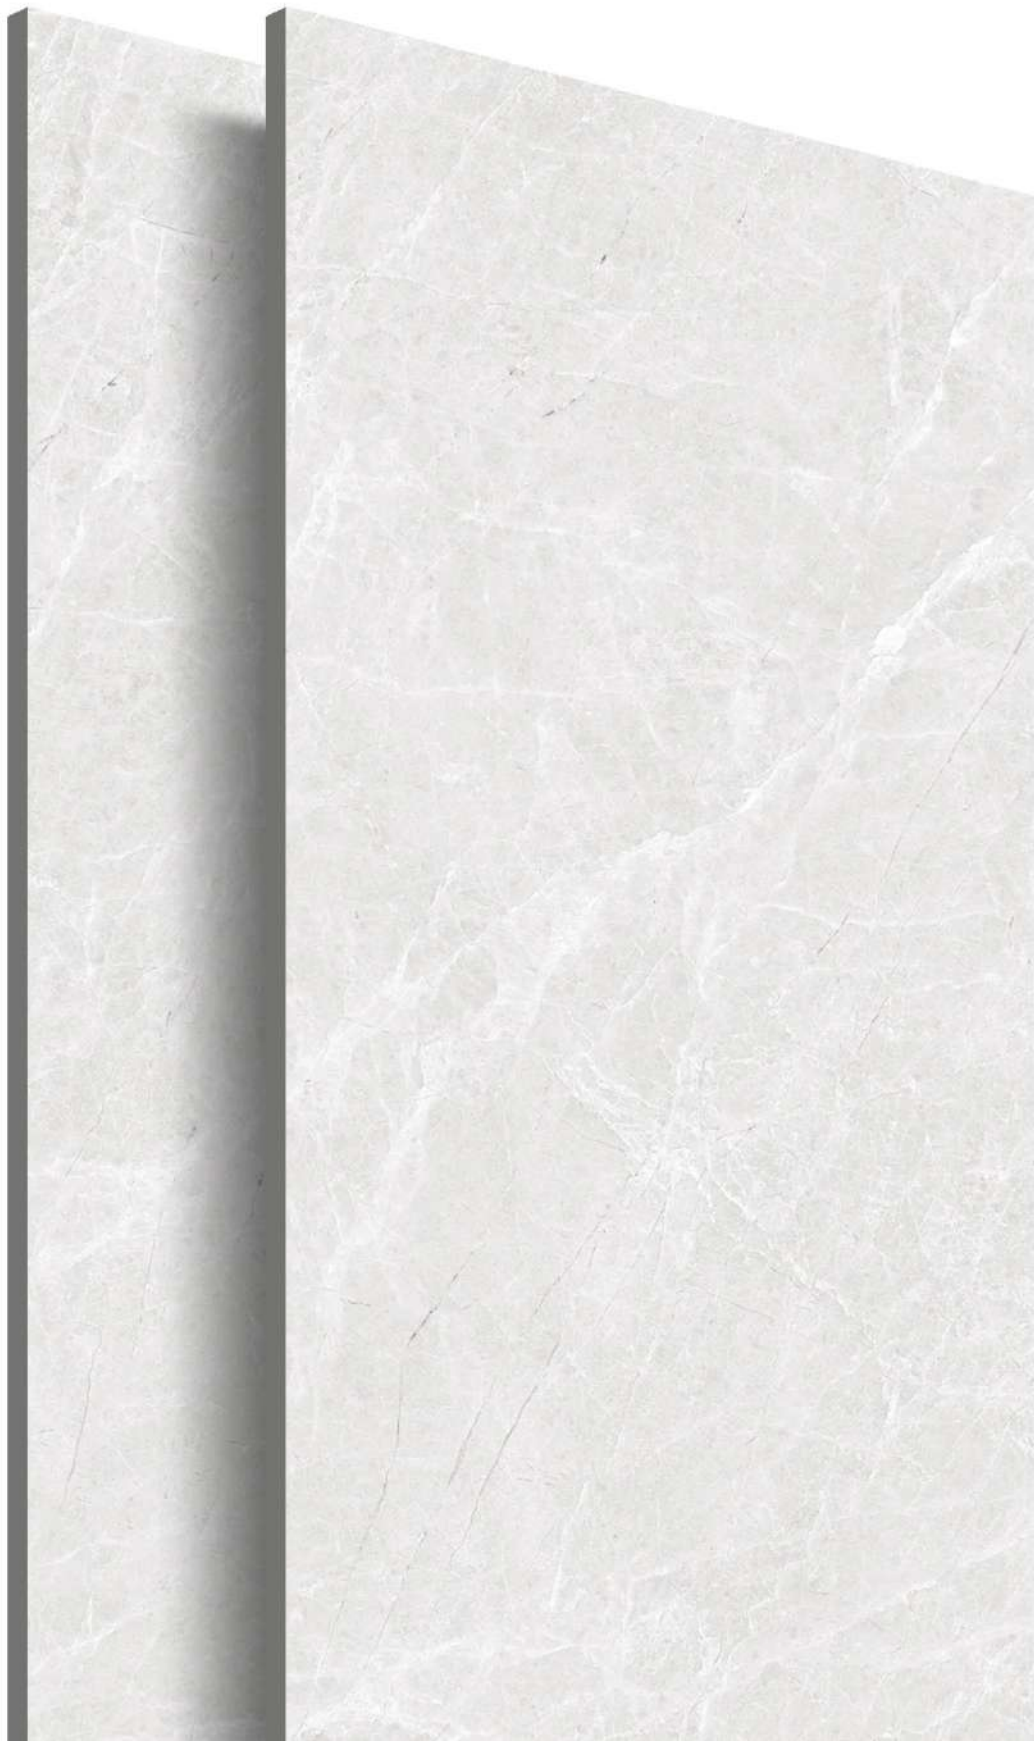

| ***ICARUS WHITE***

| Dimension :
800X1600MM

| Surface
GLOSSY

| Random
03

| Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





MAIZE-GREY

Dimension :
800X1600MM

Surface
GLOSSY

Random
03

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





MAIZE-IVORY

Dimension : 800X1600MM	Surface GLOSSY
Random 03	Thickness 9 MM








ROYAL SICILIA WHITE

Dimension : 800X1600MM	Surface GLOSSY
Random 04	Thickness 9 MM





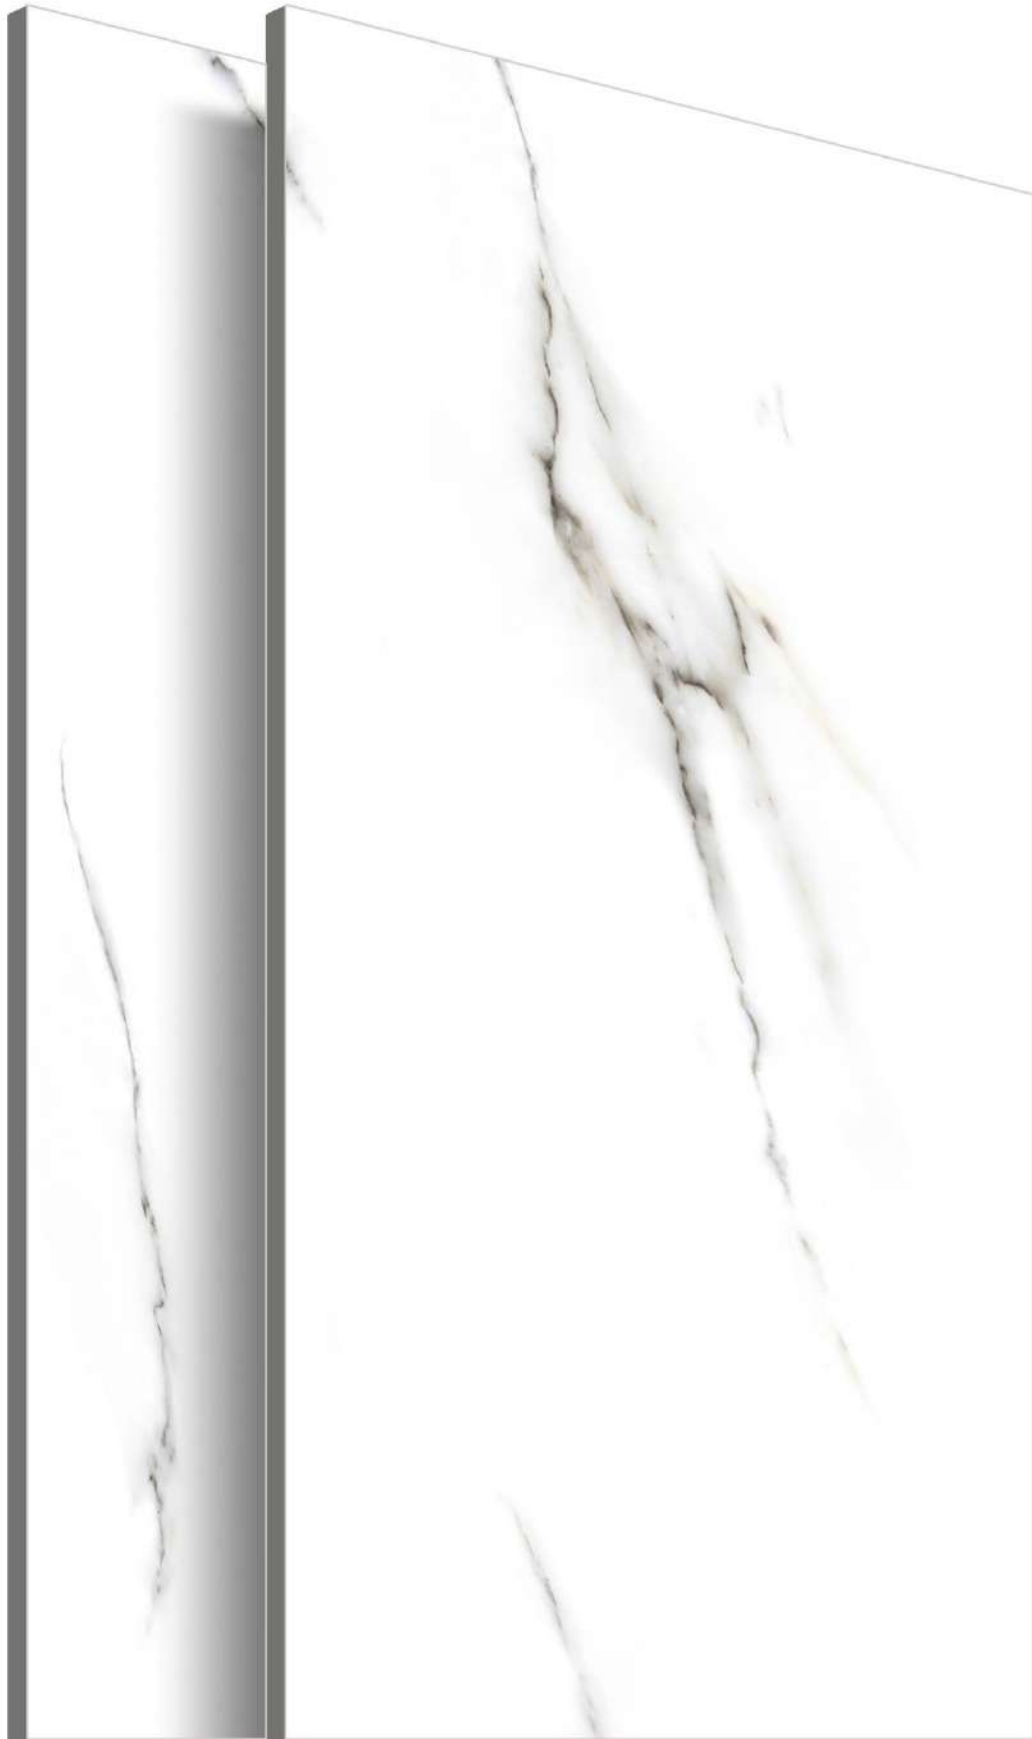

SCANTILO WHITE

Dimension : 800X1600MM	Surface GLOSSY
Random 04	Thickness 9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE





TREND BIANCO

Dimension :
800X1600MM

Surface
GLOSSY

Random
03

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE



An abstract geometric design featuring four circles and several thin black lines. The circles are: a large teal circle on the left, a small dark grey circle above it, a large brown circle below the teal one, and a small light beige circle below the brown one. Thin black lines form various geometric shapes, including a large triangle on the left, a smaller triangle on the right, and a horizontal line passing through the text.

MATT COLLECTION

ALLUMINATE CREMA

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM






ELEGANCE BEIGE

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

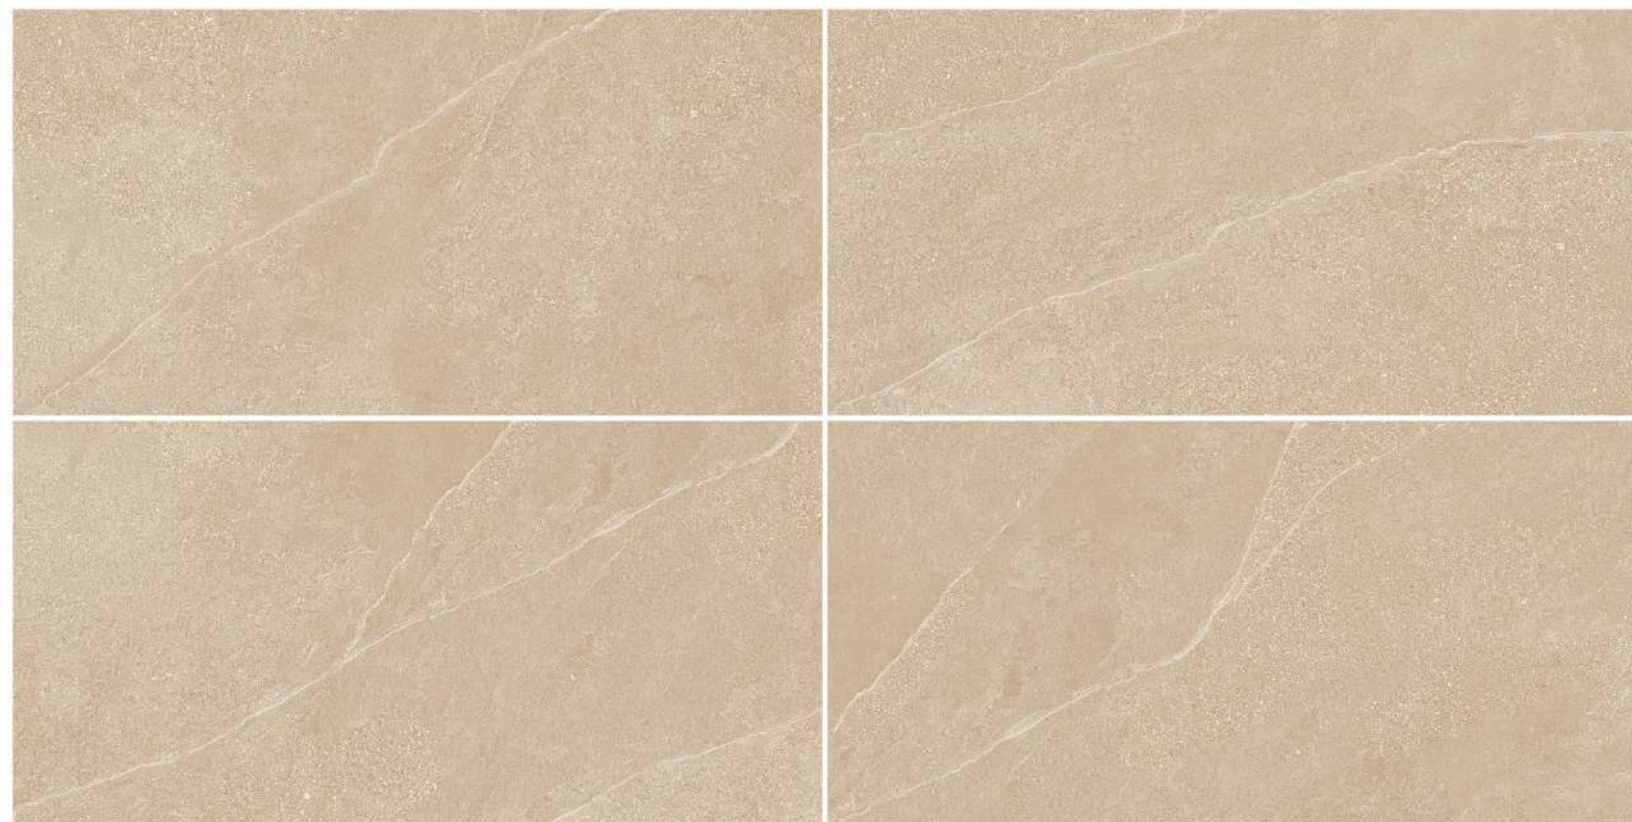




ELEGANCE BIANCO

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

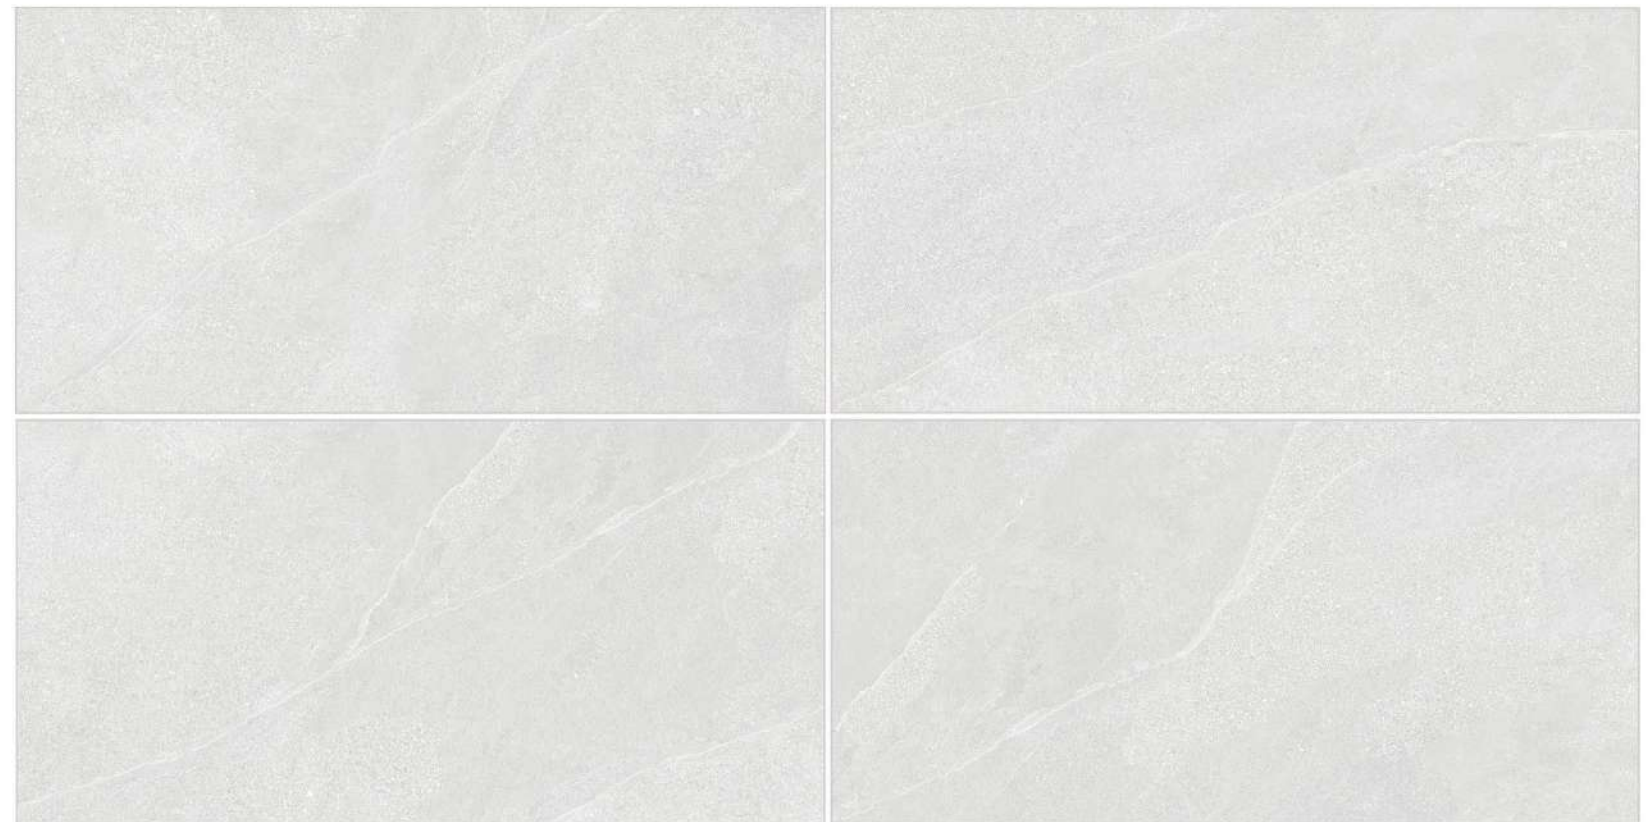



ELEGANCE GRIS

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE



ELEGANCE LATTE

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE




ELEGANCE NATURAL

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

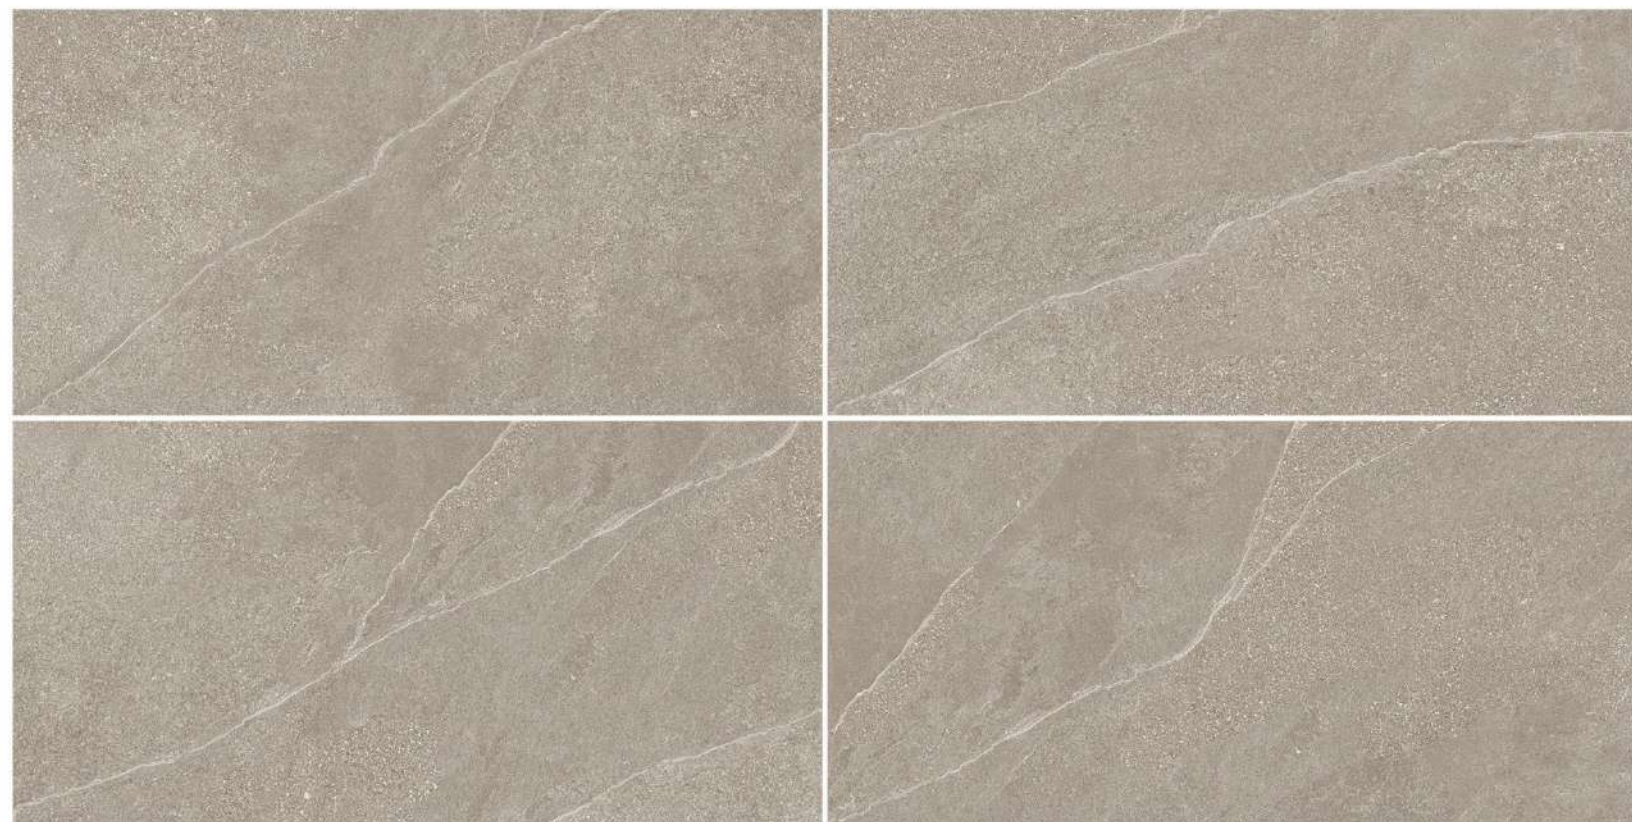

ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE




ROYALE BIANCO

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

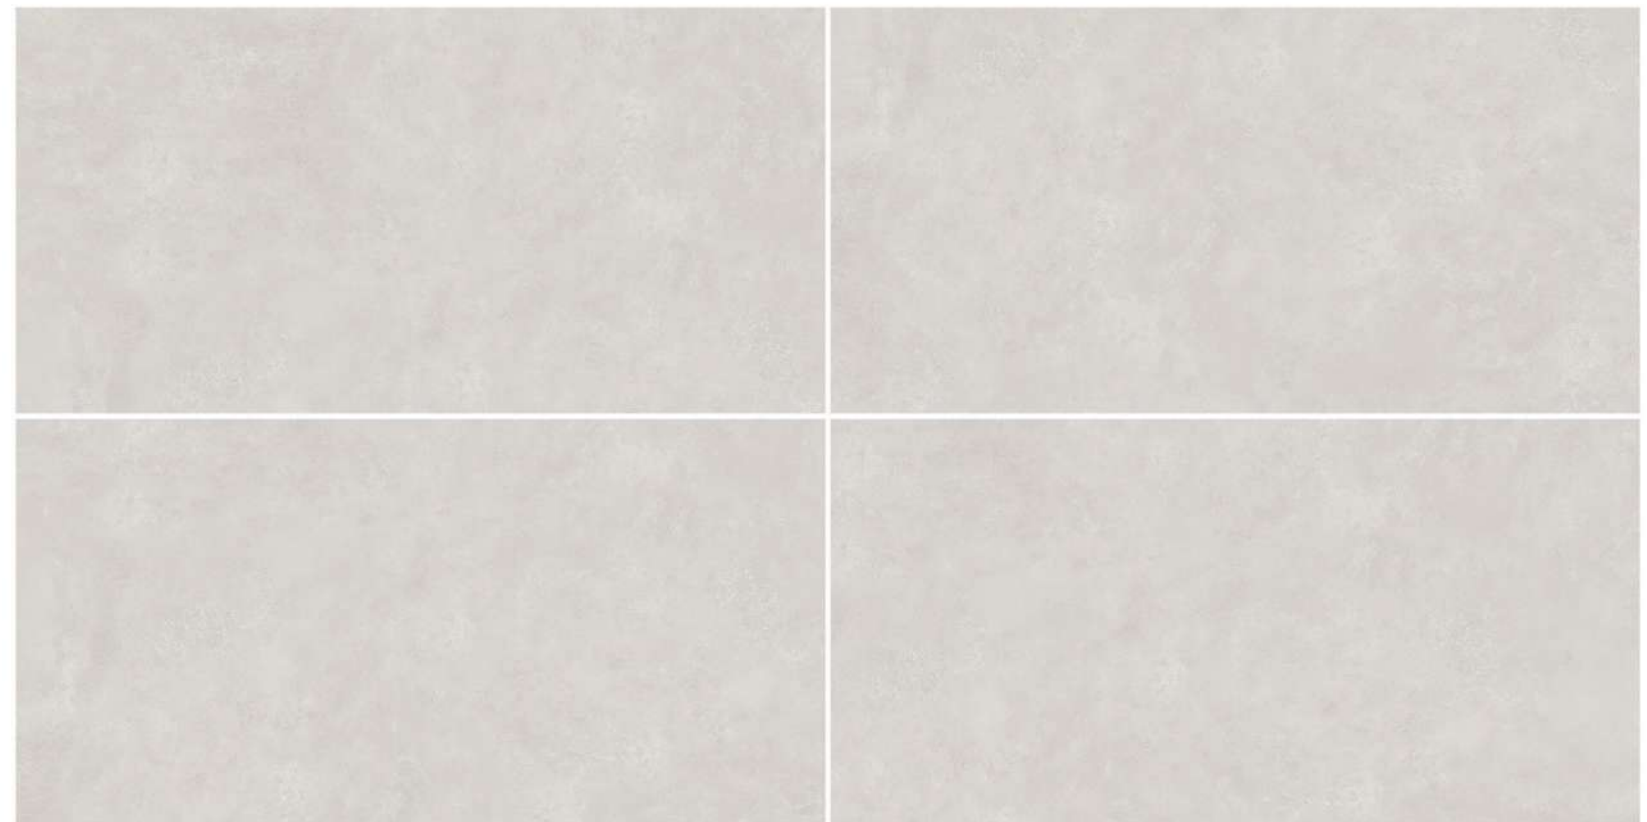




ROYALE CHOCO

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

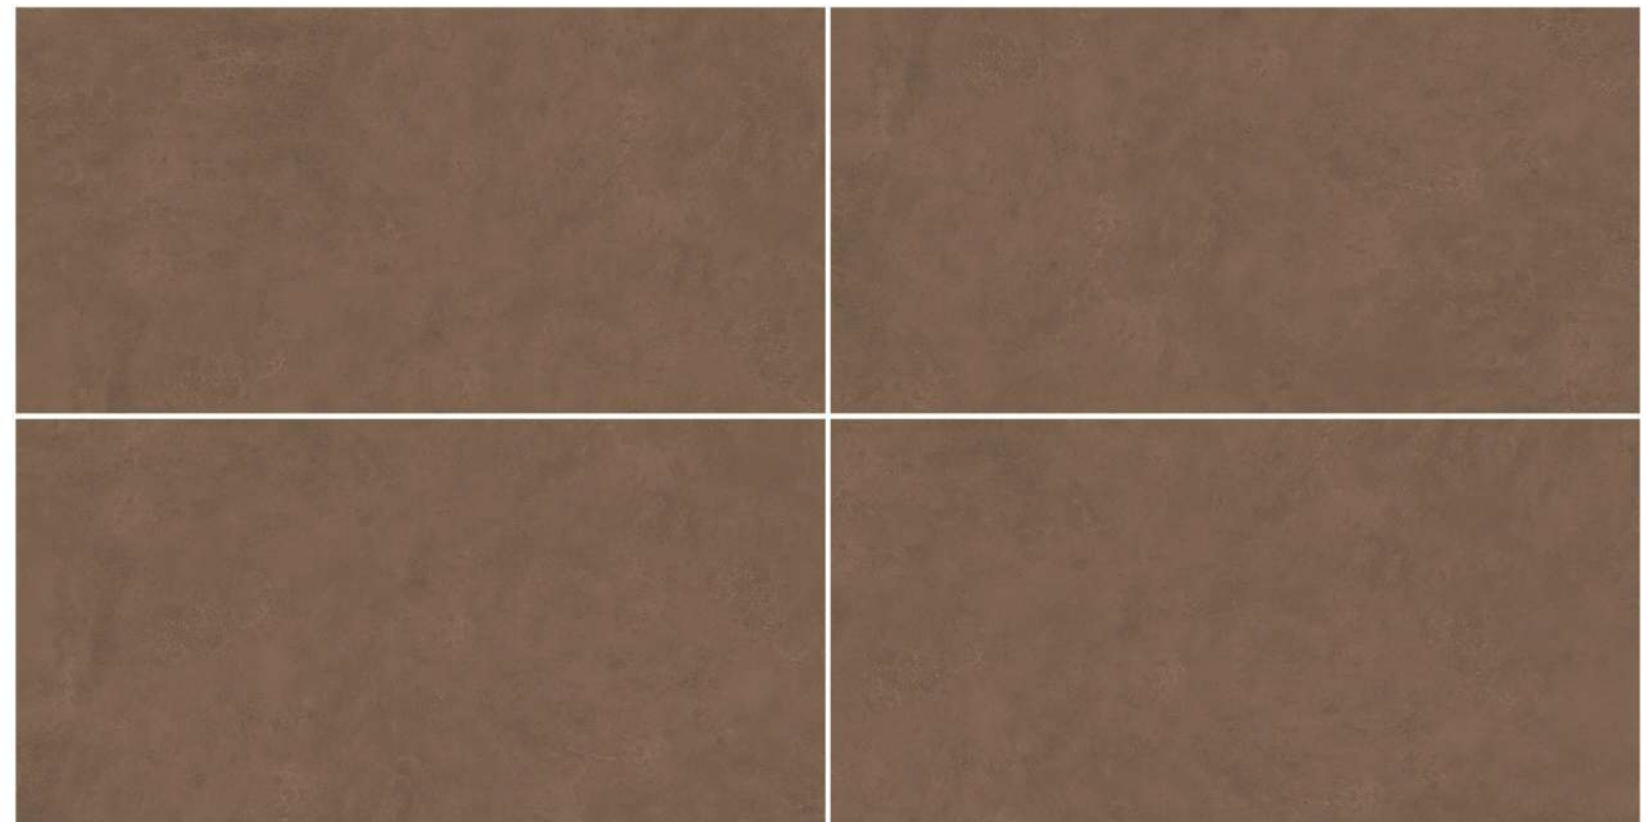




ROYALE GREY

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

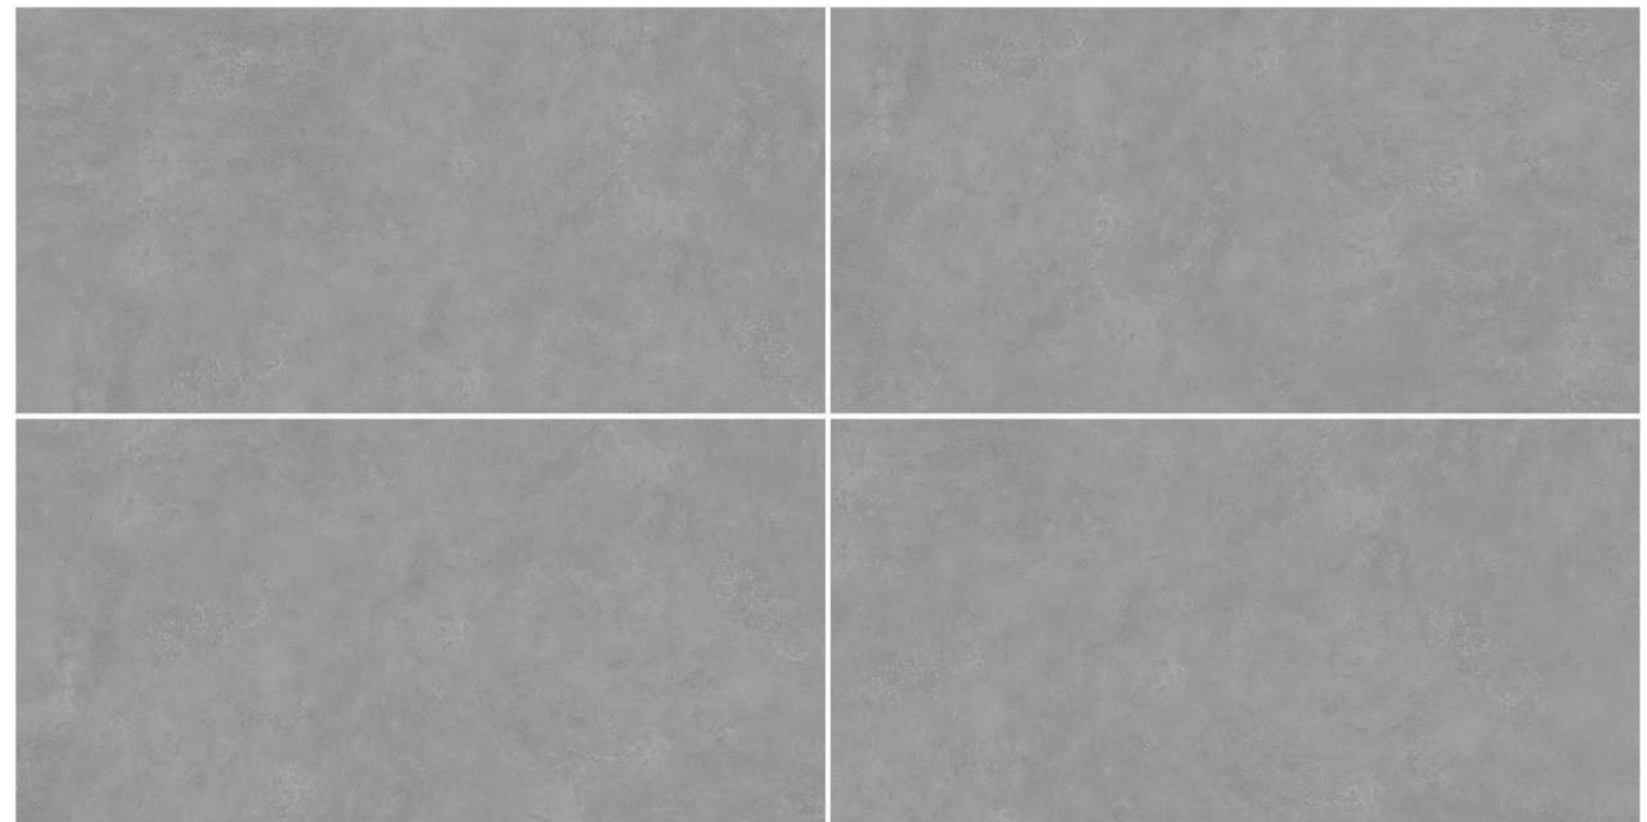




VELVET BEIGE

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

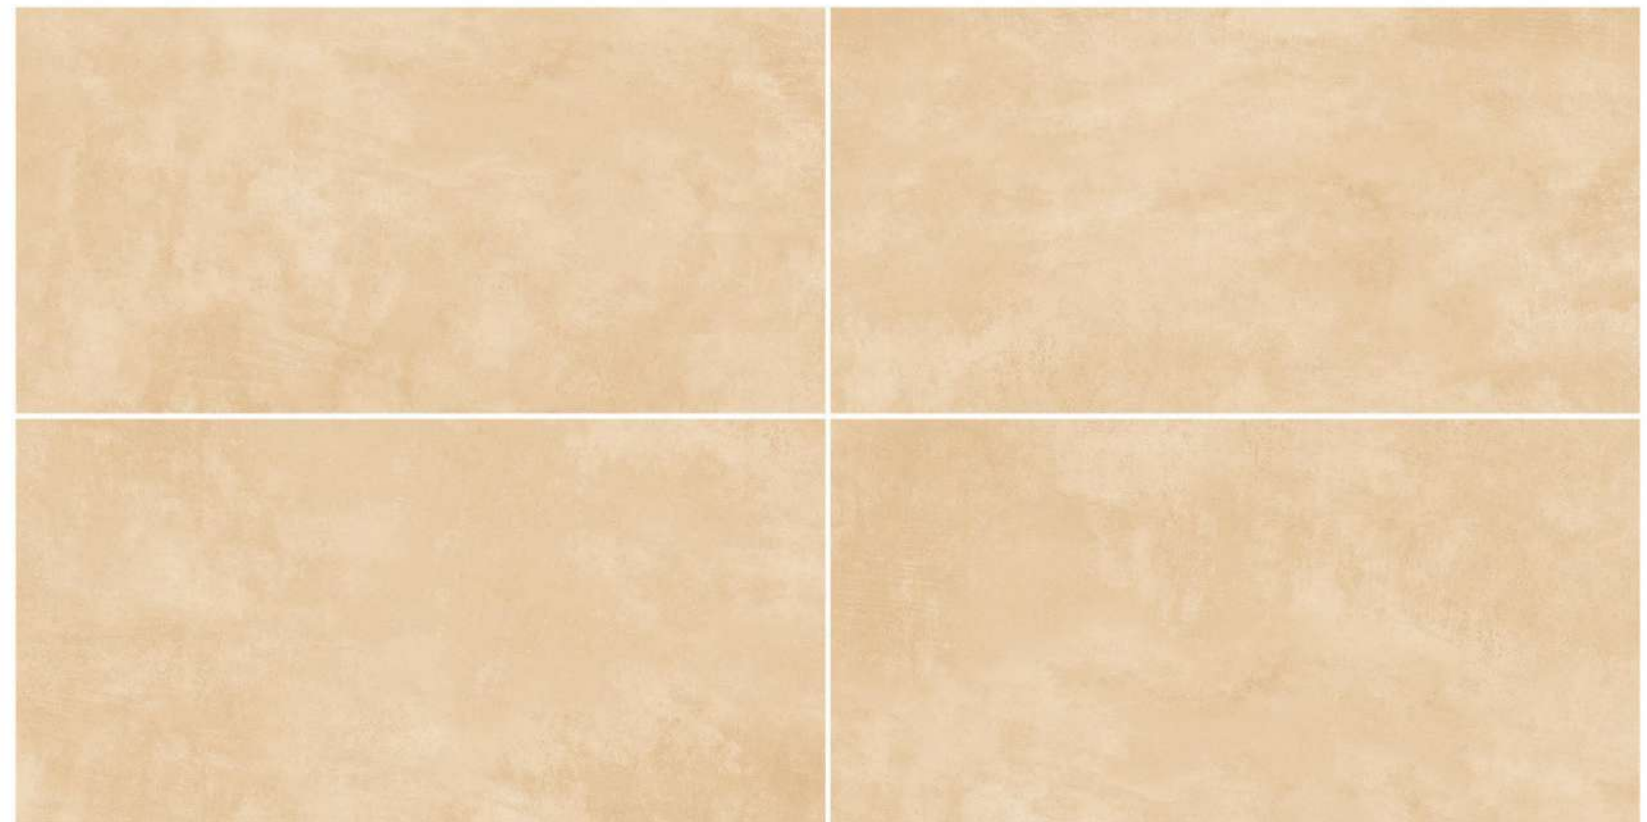

ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE




VELVET BIANCO

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

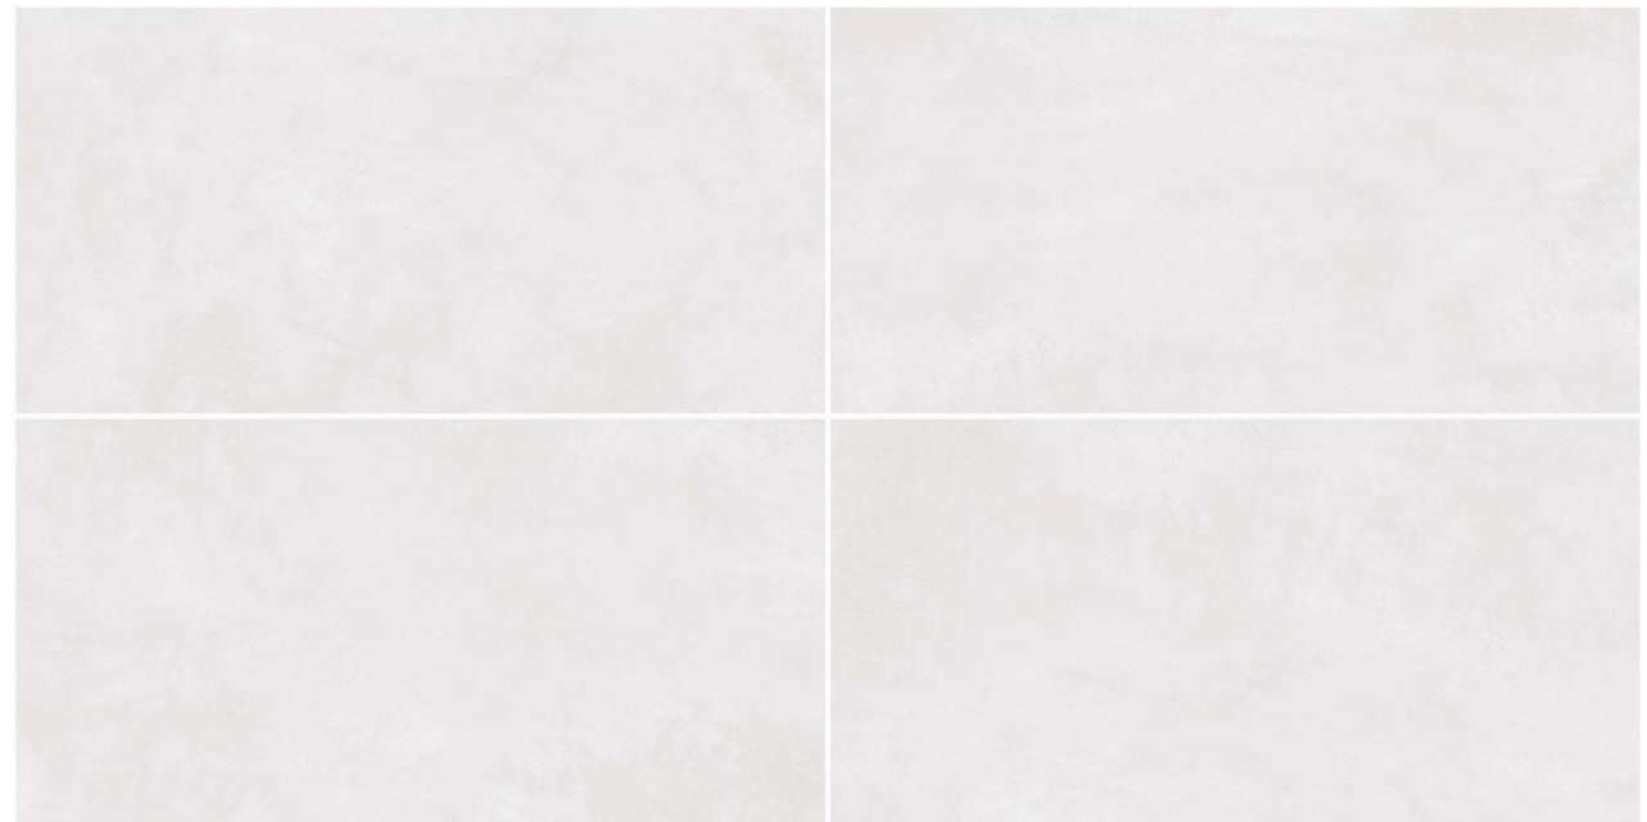




VELVET CREMA

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

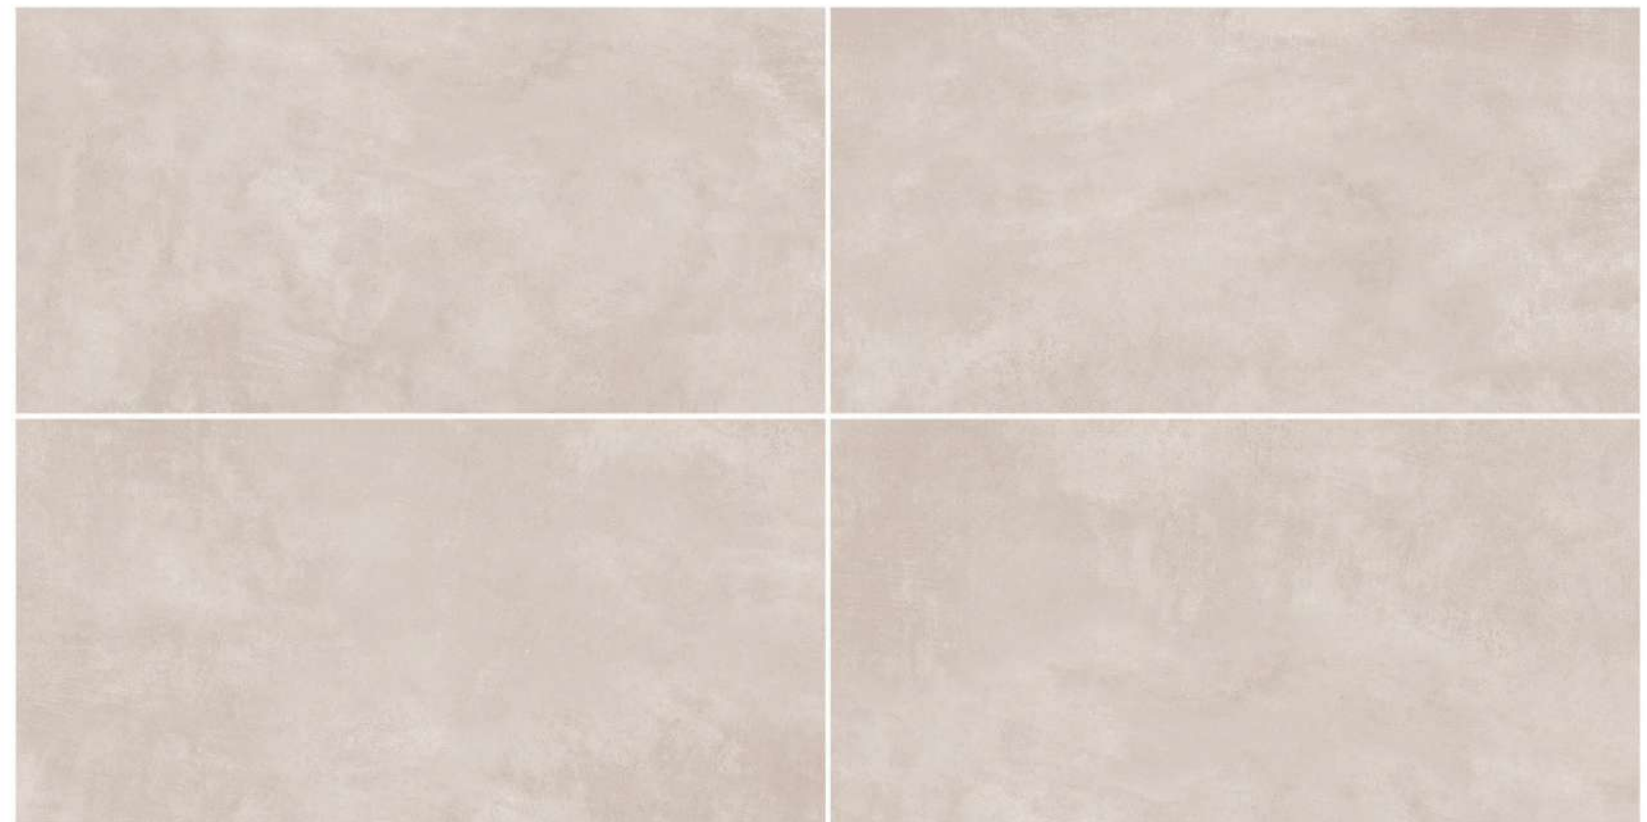




VELVET GOLD

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

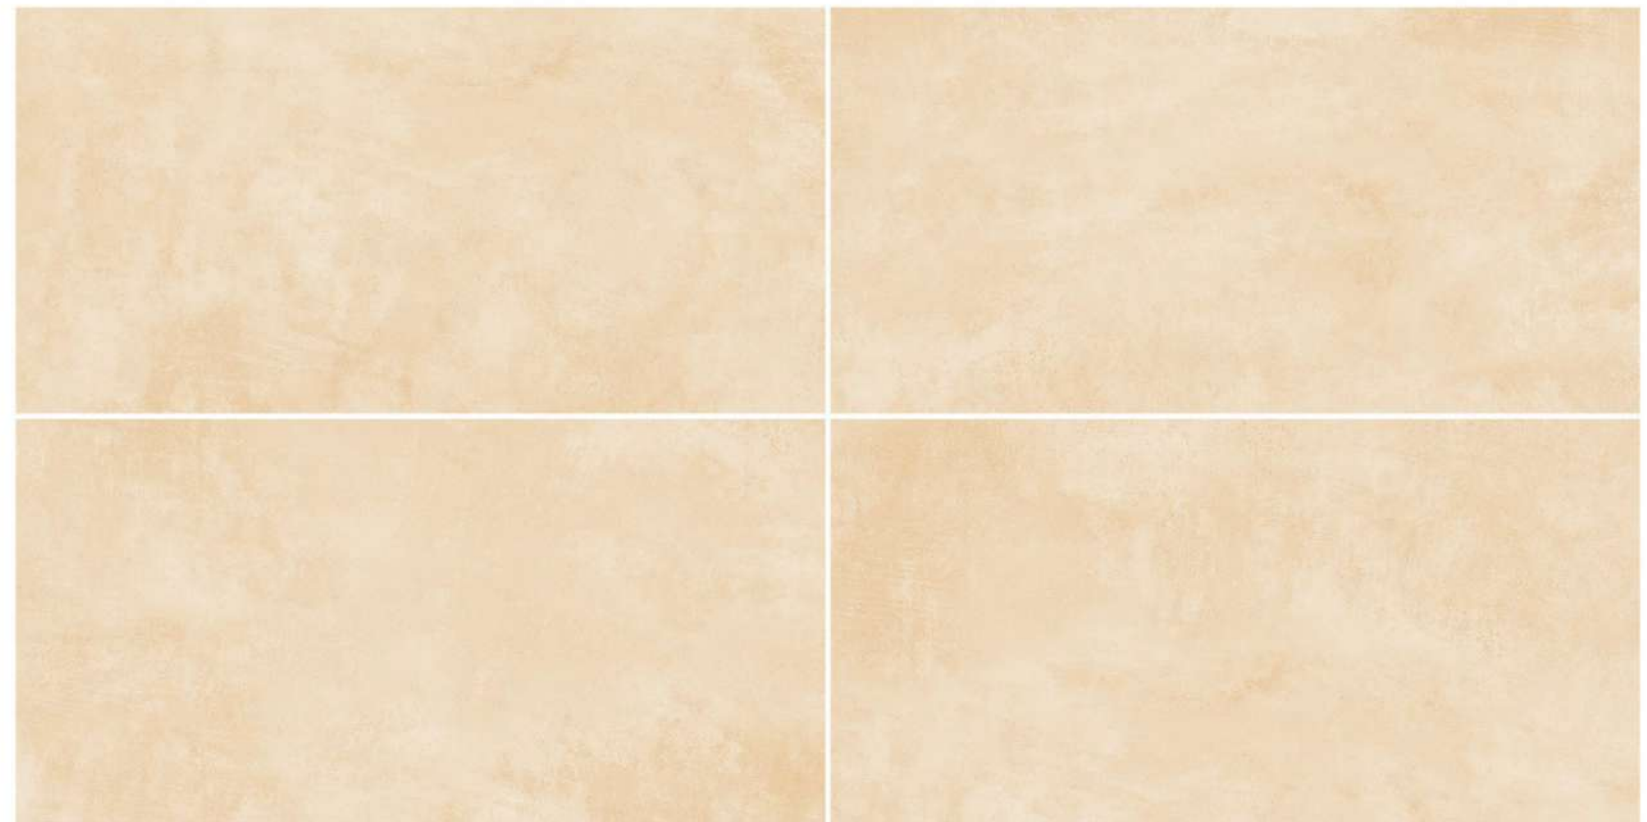




VELVET IVORY

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM

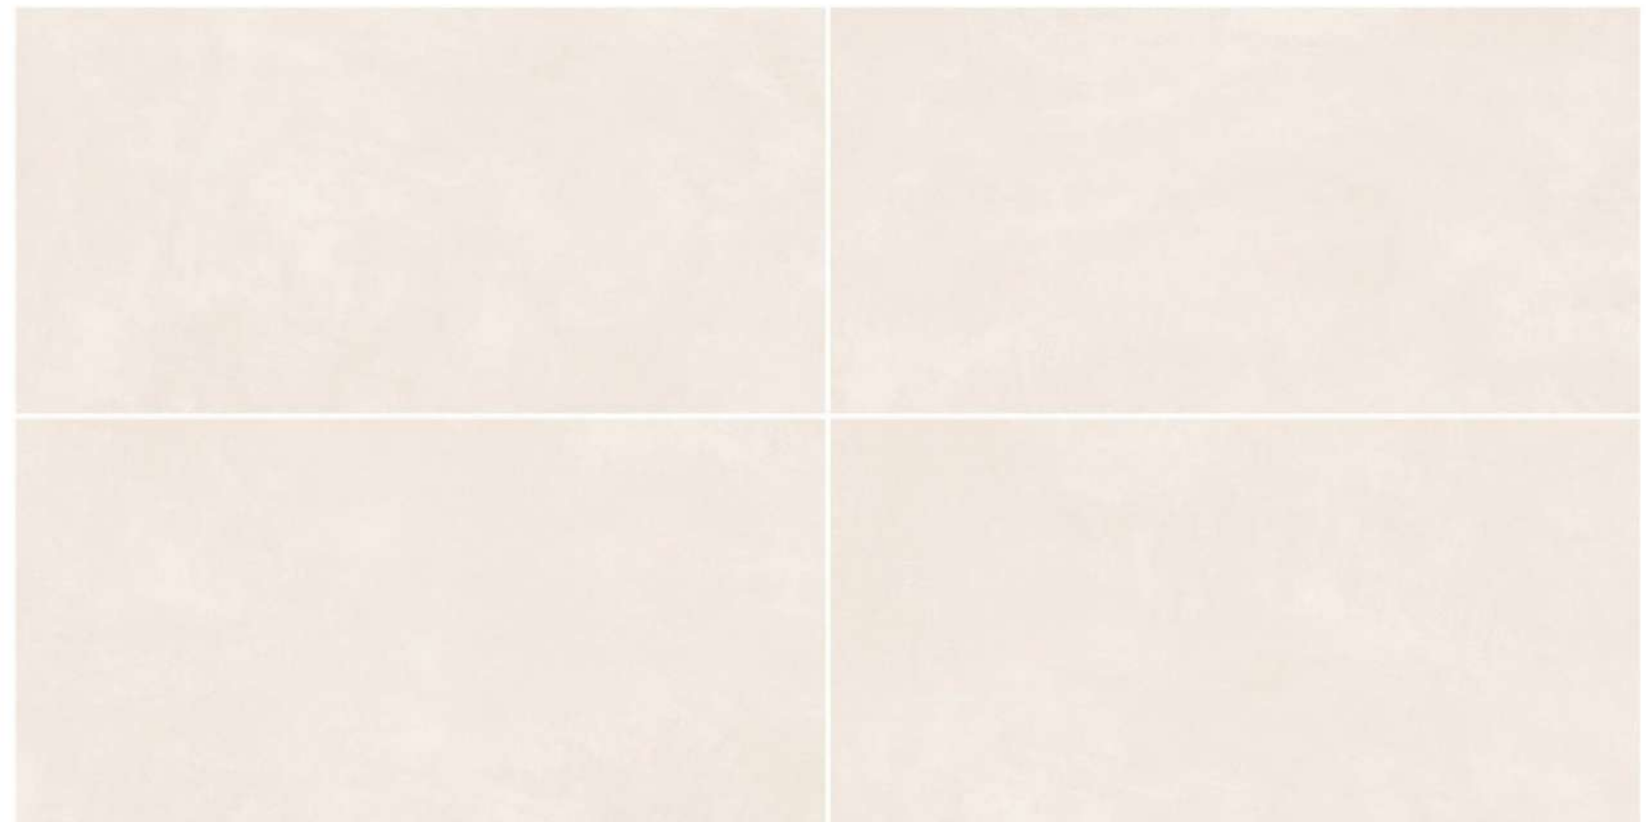

ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE



ZAMORA BEIGE

Dimension :
800X1600MM

Surface
MATT

Random
04

Thickness
9 MM





TECHNICAL SPECIFICATIONS



Sr. No.	CHARACTERISTIC	STANDARD AS PER ISO 13006/EN 14411 GROUP BIA	MEAN VALUE OF BLACKBERRY POLISHED GVT	MEAN VALUE OF BLACKBERRY GVT	TEST METHOD
REGULATORY PROPERTIES					
	Deviation in Length & Width	± 0.50 %	± 0.10 %	± 0.10 %	ISO-10545-2
	Deviation in Thickness	± 5.00 %	± 4.00 %	± 4.00 %	ISO-10545-2
	Straightness of Sides	± 0.50 %	± 0.10 %	± 0.10 %	ISO-10545-2
	Rectangularity	± 0.50 %	± 0.10 %	± 0.10 %	ISO-10545-2
	Surface Flatness	±0. 50 %	± 0.20 %	± 0.20 %	ISO-10545-2
	Color Difference	Unaltered	No Change	No Change	ISO-10545-16
	Glossiness	As Per Mfg.	> 90 %	Min 4%	Glossometer 60°
	Surface Quality	Min. 95% Tiles should be free from visible defect	Conforms	Conforms	ISO-10545-2
STRUCTURAL PROPERTIES					
	Water Absorption %	≤0.50 %	E≤0.05 %	E≤0.05 %	ISO-10545-3
	Apparent Density	> 2.0 gm / cc	>2.10 gm/ cc	>2.10 gm/ cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES					
	Flexural Modulus of Rupture	Min. 35N/ mm ²	Min. 40N/ mm ²	Min. 40N/ mm ²	ISO-10545-4
	Flexural Breaking Strength in N	Min. 1300 N	> 2000 N	> 2000 N	ISO-10545-4
	Impact Resistance	As Per Mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES					
	Surface Abrasion Resistance	As Per Mfg.	Min. Class 3	Min. Class 3	ISO-10545-7
	Moh's Hardness	As Per Mfg.	Min. 4	Min. 4	EN 101
THERMO HYDROMETRIC PROPERTIES					
	Frost Resistance	No Damage	No Damage	No Damage	ISO-10545-12
	Thermal Shock Resistance	No Damage	No Damage	No Damage	ISO-10545-9
	Moisture Expansion	Nil	Nil	Nil	ISO-10545-10
	Thermal Expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
	Crazing Resistance	As Per Mfg.	Min. 10 CycleI	Min. 10 CycleI	ISO-10545-11
CHEMICAL PROPERTIES					
	Resistance of House Hold Chem.	No Damage	No Damage*	No Damage*	ISO-10545-13
	Resistance to Staining	Resistant	No Damage	No Damage	ISO-10545-14
SAFETY PROPERTIES					
	Slip Resistance	As Per Mfg.	> 0.40	> 0.40	ISO-10545-17
	Fire Resistance	As Per Mfg.	Fire Proof	Fire Proof	N. A
	Lead & Cadmium given off by Glazed Tiles	As Per Mfg.	Dose Not Yield Pb & Cd	Dose Not Yield Pb & Cd	ISO-10545-15

*Glossiness 90% with Nani Technology in PGVT. *Except Hydrofluoric Acid it's compound

PACKING DETAILS

PRODUCT	NOMINAL SIZE	NO. OF TILES PER BOX	COVERAGE AREA / BOX
BLACKBERRY	800 x 1600 mm	2 Pcs.	2.56 Sq. Mtr.

NOTES: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the firing instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTE: Any Complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.

MAINTENANCE GUIDELINES FOR GVT

STAINS (Created by)	SOLVENTS (turpentine, Acetone, Trichloroethy-Lene ETC.)	SODIUM HYPOCHLORITE (NaOCl)	ACIDS (Hydro-Chloric Acid)	ALKALI (Sodium Hydroxide Potassium Hydroxide)
Beverages Beer				✓
Juices		✓		
Cola				✓
Coffee				✓
Tea	✓	✓		
Ink Ball / Felt Pen	✓			
Liquid Ink	✓		✓	
Marker Ink	✓			
Miscellaneous Cement			✓	
Tar	✓			
Calcar			✓	
Edible Oil	✓			
Cigarette			✓	
Glue	✓			✓
Ice Cream				✓
Paints	✓		✓	
Resins	✓			
Rust			✓	
Blood				✓

TILES FIXING INSTRUCTIONS

1. Plaster the surface of the floor where the tiles will be laid with smooth finish and complete the plastering and curing at least two weeks prior to laying. 2. Before fixing BLACKBERRY tiles, lay them out in the desired pattern and make sure that they give an acceptable blend of colour. Please note that certain amount of shade variation is inherent in the manufacture of fully Vitrified ceramic tiles. THE COMPANY WILL BEAR NO LIABILITY AFTER THE TILES ARE FIXED. 3. The company bears no responsibility towards the tiles exposed to any outside process like transfers, printing, firing etc. 4. For fixing BLACKBERRY tiles we recommend the use of tile fixing adhesives for best results. Also follow the fixing instructions provided along with the adhesives. 5. For fixing BLACKBERRY tiles on the floor, using sand and cement, follow the instructions given below: (a) Use cement and sand mortar in the ratio of 1:4. Add some water to create a consistent paste. (b) Once the mixing has completed do not add any further water and use the same within one hour. (c) Apply a 20-30 mm, layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and full bedding. Press gently for even adherence at the back of the tile. DO NOT USE AN IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILE. 6. For fixing BLACKBERRY tiles on Dado, we recommend the use of tile fixing adhesive with proper troweling method for 100 per cent coverage behind the tiles and for peerless bonding. Please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on Dado. 7. Make and lay out the tiles from the center of the area to be laid so that cut tiles, if any, will be on the outer edges towards the walls. 8. The work size which we try to maintain for better technical performance is 600mm x 600mm, 600mm x 1200mm on average. It is advisable to maintain a gap of 1 mm to 2 mm between every two tiles to allow for possible expansion as per BIS/EN tolerance norms. 9. Complete the laying process by pressing the cut BLACKBERRY tiles firmly into place along the walls/floors. 10. Allow 3-4 days for bed curing. After this period fill the joints with grouts. Usage of grout sealant is recommended for keeping the grout free of dust. 11. Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be cleaned with a mild acid (However, Hydrofluoric acid and its derivatives should not be used). 12. Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

Kindly look for the arrow (⇒) on the back of the tile and follow the laying pattern as shown in Pic-1:



Nothing in these instructions is a Substitute for Good Workmanship and Supervision

Size-able Showcase



The intricacies of size and design affect the whole outlook and we understand your concern about the size specifications quite well. Also, the design that's uniform and long-lasting has a greater impact on your investment. Choose Blackberry Tiles and you need not worry about anything. Just let us know what you need

1200 x 2400mm	GVT
800 x 2400mm(15mm)*	GVT
1200 x 1800mm*	GVT
800 x 1600mm	GVT
260 x 1600mm	WOODEN GVT
600 x 1200mm	GVT
195 x 1200mm	WOODEN GVT
600 x 600mm	GVT
600 x 900mm(16mm)*	OUTDOOR GVT
600 x 600mm(16mm)*	OUTDOOR GVT
300 x 600mm	CERAMIC WALL TILES
300 x 450mm	CERAMIC WALL TILES
300 x 300mm	CERAMIC WALL/FLOOR TILES



*upcoming



BLACKBERRY TILES PVT. LTD.

Admin Office

Jetpar Pipli Road, Sapar, Morbi-363642. Gujarat - INDIA

Gvt Plant:

Morbi-Halvad Road, At. Unchi Mandal, Morbi-363641. Gujarat, India.

Customer Care No.: +91 90999 86724



Click for visit:
www.blackberrytiles.com

Super Made
in India 